Series QX - Twin Cylinders

Product code: QXT2A025A050

Datasheet creation date: 19/05/2026 09:24

Check the most updated document online *click here*




TECHNICAL DATA

Series (mm)	QX
Version (mm)	T = sintered bronze bushes
Operation	2 = double-acting (1 flange) radial \ axial pressure supply
Materials (mm)	A = anodized aluminium body, rolled stainless steel 303 piston rod
Diameter (mm)	25
Construction (mm)	A = standard
Cylinder stroke (mm)	50
Certifications (mm)	= standard

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Series QX - Twin Cylinders

Product code: QXT2A025A050

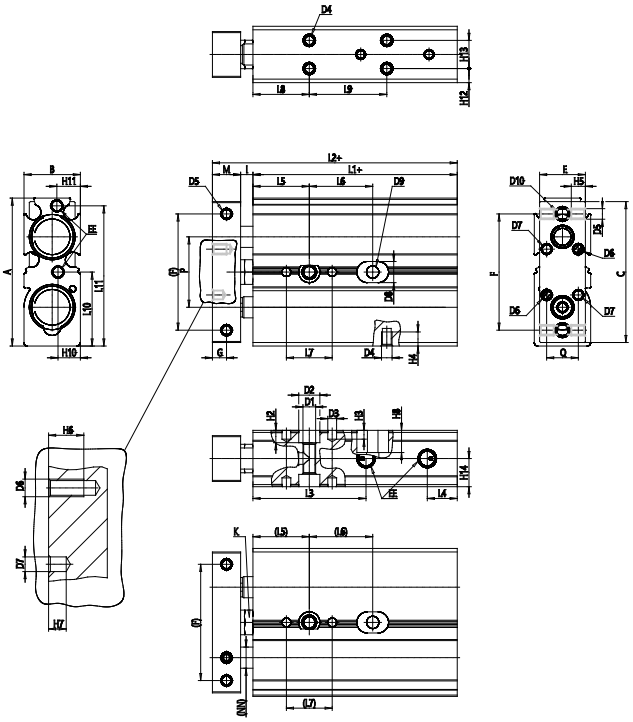

DIMENSIONS

A (mm)	76
B (mm)	30
C (mm)	71
E (mm)	27
F (mm)	60
G (mm)	6
I (mm)	4.5
M (mm)	12
Q (mm)	16
R (mm)	18
L1 (mm)	70.5
L2 (mm)	87.0
L3 (mm)	44.0
L4 (mm)	8.5
L5 (mm)	30
L6 (mm)	40.0
L7 (mm)	20
L8 (mm)	30
L9 (mm)	40.0
L10 (mm)	38.0
L11 (mm)	71.5
H2 (mm)	6.5
H3 (mm)	4.0

H4 (mm)	5.0
H5 (mm)	6.0
H6 (mm)	8
H7 (mm)	4
H8 (mm)	0.0
H10 (mm)	15.0
H11 (mm)	21.0
H12 (mm)	8.5
H13 (mm)	13
H14 (mm)	15.0
D1	M8
D2 (mm)	10.5
D3 (mm)	4.0
D4 (m)	M5
D5	M5
D6	M4
D7 (mm)	4.0
D8 (mm)	0
D9 (mm)	0.0
D10	M6
NN (mm)	12
EE	M5
J (mm)	0.0

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com