
Rodless cylinders - Series 52

Product code: 52G8P25A0570

Datasheet creation date: 19/05/2026 15:08

Check the most updated document online *click here*

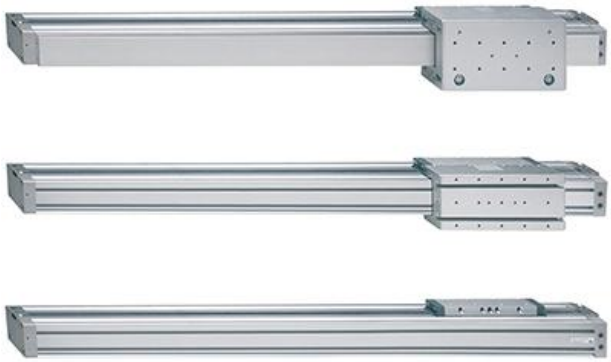


TECHNICAL DATA

Series	52G8P25A
Diameter (mm)	25
Version	G = with slide bearing
Operation	8 = double-acting, cushioned, with air supply from one side only
Materials	P = anodized AL profile tube, NBR and Polyurethane seals, standard carriage
Construction	A = standard
Stroke Cylinder (mm)	570

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Rodless cylinders - Series 52

Product code: 52G8P25A0570

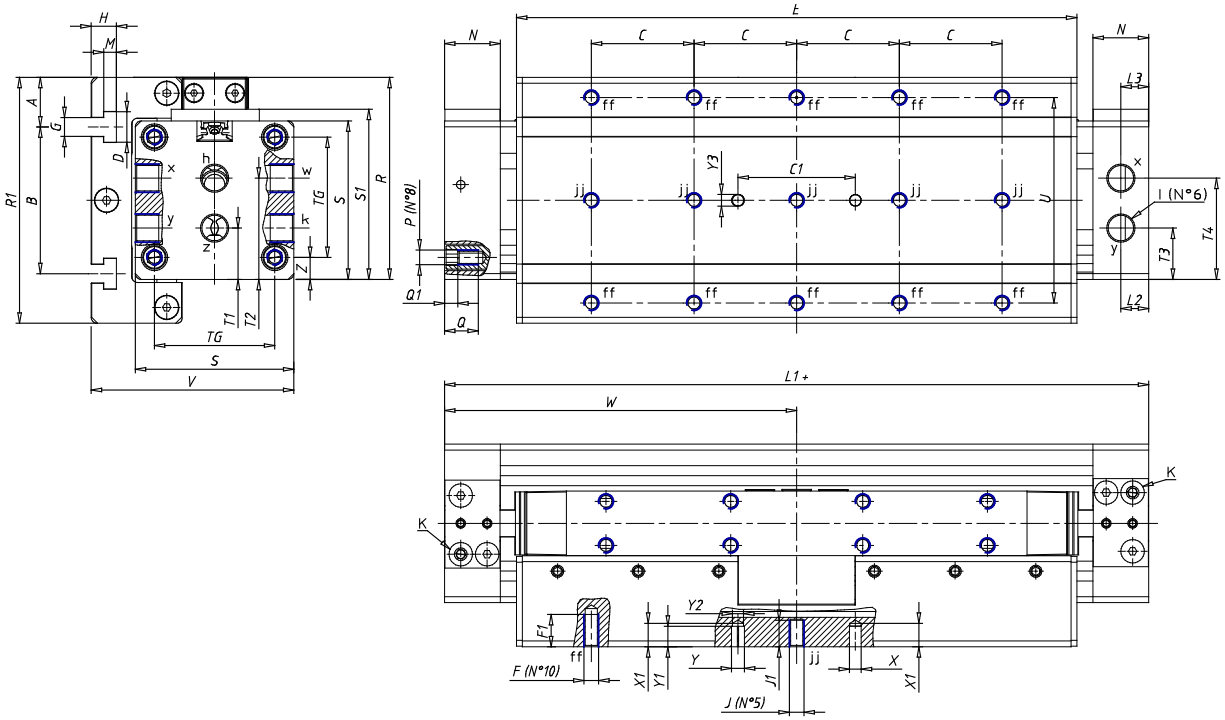

DIMENSIONS

W (mm)	100.0
E (mm)	159.0
L1 (mm)	200
I	G1/8
B (mm)	50
G (mm)	6.5
N (mm)	19
L (mm)	9.5
Ø A (mm)	12.5
Ø X (mm)	4.0
S1 (mm)	49
T (mm)	25.0
Z (mm)	4.5
C1 (mm)	40
C (mm)	30
U (mm)	30
F	M5
F1 (mm)	8.0
H (mm)	8.5
V (mm)	59.0
S (mm)	45
R (mm)	60
P	M4

TG (mm)	36
Q (mm)	11
Q1 (mm)	3
T1 (mm)	13.5
T2 (mm)	29.5
T3 (mm)	13.5
T4 (mm)	28.5
L2 (mm)	8.0
L3 (mm)	11.0
D (mm)	10.5
M (mm)	4.5
J	-
JP (mm)	0.0
J1 (mm)	0
R1 (mm)	75.0
X1 (mm)	5.5
Y (mm)	4.5
Y1 (mm)	4.5
Y2 (mm)	4
Y3 (mm)	4
R2 (mm)	71.0

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com