Stainless steel cylinders - Series 97

Product code: 97S2A050A0165

Datasheet creation date: 20/05/2026 06:21

Check the most updated document online *click here*






TECHNICAL DATA

Series	97
Version	S = male bracket with swivel ball joint
Operation	2 = double-acting (front and rear cushioning)
Materials	A = stainless steel AISI 304 - PU seals
Diameter (mm)	50
Construction	A = standard (locking ring for end cap V + lock nut for rod U)
Stroke (mm)	165
Rod length (mm)	0
rod seal in FKM	-

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Stainless steel cylinders - Series 97

Product code: 97S2A050A0165

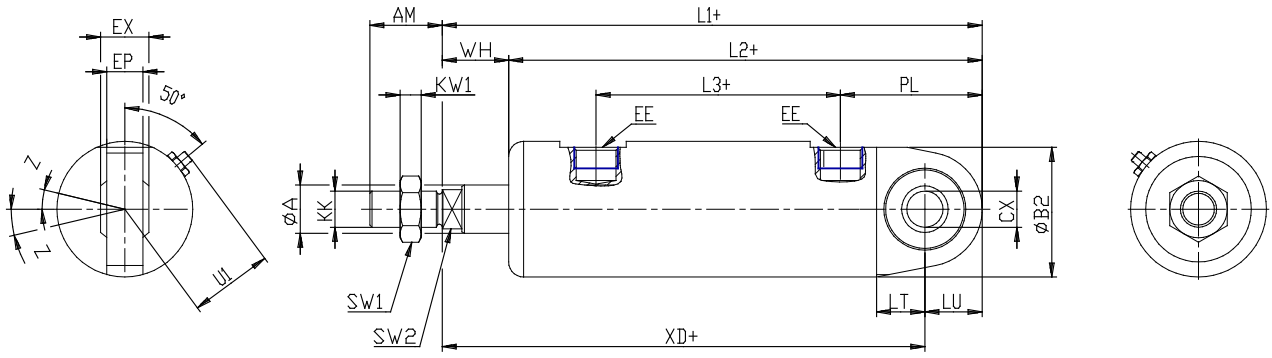

DIMENSIONS

Ø A (mm)	20
AM (mm)	32
Ø B (mm)	-
Ø B2 (mm)	55
CB (mm)	-
CX (mm)	16
EE	G1/4
EP (mm)	15
EX (mm)	21
EW (mm)	-
F (mm)	6
G (mm)	53
KK	M16X1,5
PL (mm)	49.0
SW (mm)	-
SW1 (mm)	24
KW1 (mm)	8
SW2 (mm)	17
U1 (mm)	33
WH (mm)	28.5
L1 (mm)	190.5
L2 (mm)	162.0
L3 (mm)	82

L4 (mm)	-
L7 (mm)	-
L (mm)	-
LT (mm)	21
LU (mm)	20.5
KW (mm)	-
Ø KV (mm)	-
XD (mm)	170
XG (mm)	-
TD (mm)	-
TL (mm)	-
UB (mm)	-
UT (mm)	-
ZC (mm)	-
Z (mm)	15

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com