Direct acting solenoid valve (90° connection) - Series K

Product code: K000-303-K13

Datasheet creation date: 19/05/2026 16:57

Check the most updated document online *click here*




TECHNICAL DATA

Series	K000
Number of ways - functions	3 = 3/2 vie - NC
Thread port	0 = manifold or single base
Orifice diameter	3 = Ø 0.6 mm - 3/2 version
Materials	K = PBT body - HNBR poppet seal (only for 3/2-way versions)
Electrical connection	1 = 90° connection with protection and led
Voltage - power consumption	3 = 24 V DC - 1 W
Fixing	= fixing screws for plastic
Use with oxygen	= Not suitable for use with oxygen

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Direct acting solenoid valve (90° connection) - Series K

Product code: K000-303-K13

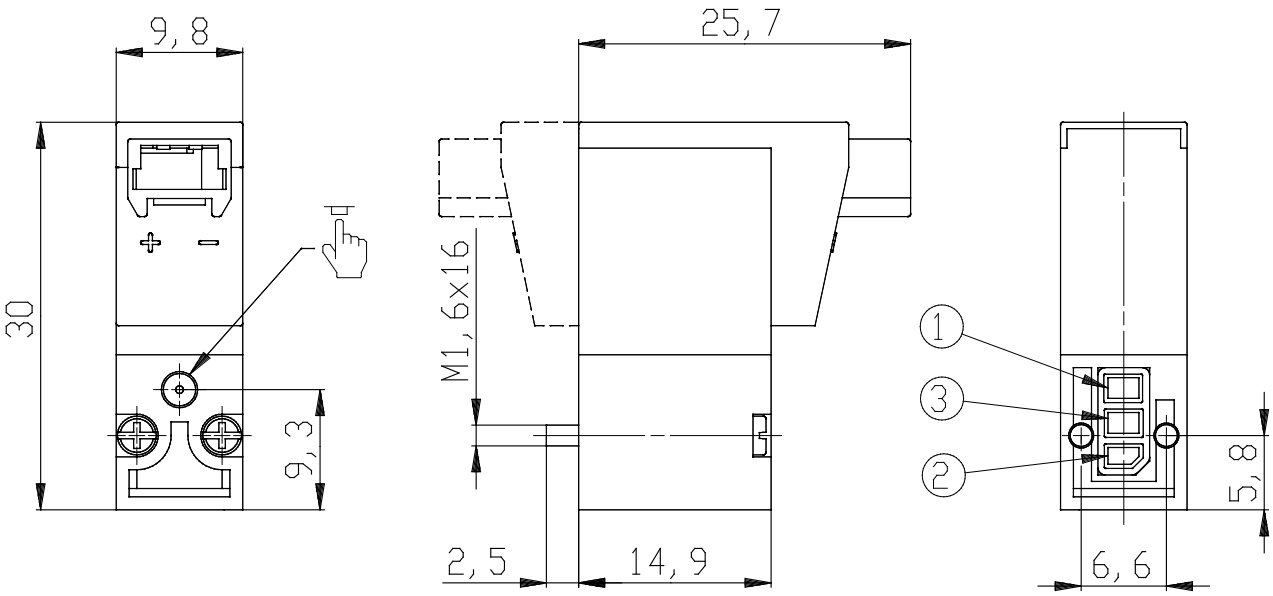

DIMENSIONS

Series	K000
Number of ways - functions	3 = 3/2 vie - NC
Thread port	0 = manifold or single base
Orifice diameter	3 = Ø 0.6 mm - 3/2 version
Materials	K = PBT body - HNBR poppet seal (only for 3/2-way versions)
Electrical connection	1 = 90° connection with protection and led
Voltage - power consumption	3 = 24 V DC - 1 W
Fixing	= fixing screws for plastic
Use with oxygen	= Not suitable for use with oxygen

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com