Direct acting solenoid valve - Series KN

Product code: KN000-305-F18M

Datasheet creation date: 19/05/2026 18:10

Check the most updated document online *click here*




TECHNICAL DATA

Series	KN
Body	0 = single valve
Number of positions	interface
Function	3= 3/2 NC
PORTS (IN - OUT)	0 = ISO 15218 on subbase or manifold
Diameter	5 = Ø 1.1 mm - only for NC version with minimum pressure required to operate
Materials	F = PBT body - FKM poppet - FKM other seals
Type of connection	1 = 90° connection with protection and led
Voltage	8 = 24 V DC - 4/1 W
Fixing	M = fixing screws for metal
Use with oxygen	= Not suitable for use with oxygen

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Direct acting solenoid valve - Series KN

Product code: KN000-305-F18M

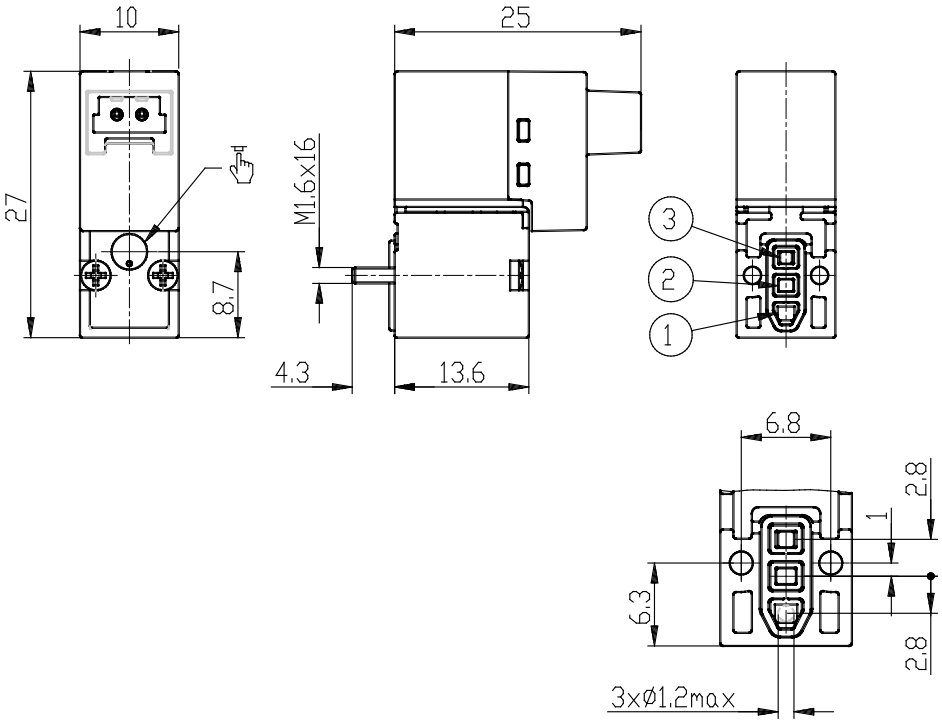

DIMENSIONS

Series	KN
Body	0 = single valve
Number of positions	interface
Function	3= 3/2 NC
PORTS (IN - OUT)	0 = ISO 15218 on subbase or manifold
Diameter	5 = Ø 1.1 mm - only for NC version with minimum pressure required to operate
Materials	F = PBT body - FKM poppet - FKM other seals
Type of connection	1 = 90° connection with protection and led
Voltage	8 = 24 V DC - 4/1 W
Fixing	M = fixing screws for metal
Use with oxygen	= Not suitable for use with oxygen

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com