
0150

Vacuum switch up to 250 V with changeover contact

- Aluminium housing
- Operating voltage up to 250 V
- Changeover with silver contacts
- Overpressure safety up to 20 bar[1)]
- Socket device similar to DIN EN 175301 (DIN 43650)
- Hysteresis approx. 50 – 150 mbar (cannot be changed)






p_{max} in bar	Adjustment range in mbar (relative)	Tolerance at room temperature in mbar	Thread	Order number
0150 Vacuum switch				
20[1)]	100 – 950	± 50	G 1/8 female	0150 - 456 15 - 4 - 001

Seal material – Application areas

ECO	Air, oils, greases, fuel/gasoline	4

Temperature resistance: -20 °C … +100 °C

Your order number:	0150 – 456 15 – 4 – 001

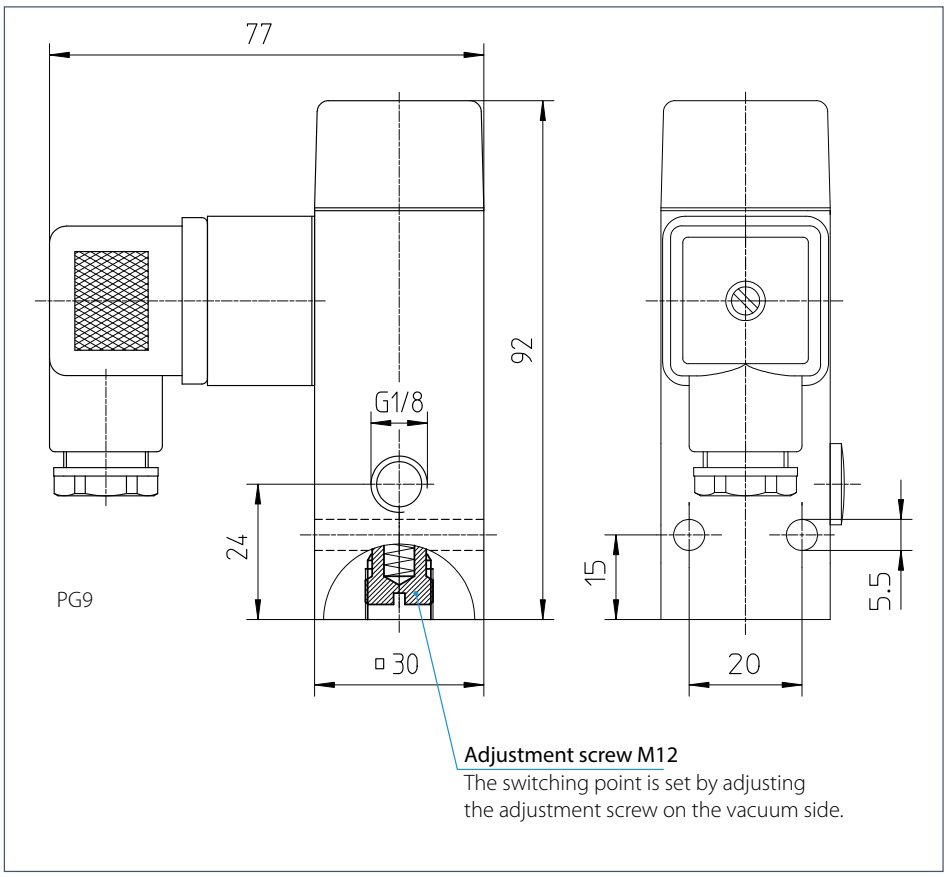

RoHS II compliant

CE

[1)] Static value. Dynamic value is 30-50 % lower. Values pertain to the hydraulic/pneumatic part of the pressure switch.