ELECTRONIC VACUUM/PRESSURE SWITCHES
SERIES SWDN

With digital display
High precision, easy to use



- Compact and lightweight
- Digital indicator: precision electronic insertion with two separated switch outputs
- Switching point and hysteresis can be programmed with a membrane keypad

Applications:

- Electronic vacuum/pressure switch for safety monitoring, optimization of cycle times or energy saving devices;
- It can be installed directly on the gripping point of a handling system;
- Setting of the limit vacuum value and
- Continuous vacuum control;
- Perfectly suitable for customer needs.

Electric connection:

The device is available with hardwired cable of 2 meters or can be supplied with M8 connector.
Accessories and extensions have to be ordered separately. Codes can be found at the end of this section.

General Data

Pressure/vacuum switch	Electronic with polycarbonate housing
Port	With external thread G1/8 and internal thread M5
Display	3 Digit display with membrane keypad for the values set up
LED	Integrated LED indicators for switching state
Electric connection	With M8 4-pole connector or pre-wired cable of 2 meters

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

ELECTRONIC VACUUM/PRESSURE SWITCHES
SERIES SWDN - CODING EXAMPLES

CODING EXAMPLE

SWDN	V01	P3	2


SWDN	SERIES
V01	SET PRESSURE RANGE: V01 = From -1 bar to 1 bar P10 = From 0 bar to 10 bar
P3	TYPE OF ELECTRIC CONNECTION: P3 = 2 PNP outputs + 1 analog output 1 - 5 V DC (this version is available with 5-pole cable only) P4 = 2 PNP outputs
2	ELECTRIC CONNECTION: 2 = Cable of 2 meters M = M8 4 pin connector

Vacuum/Pressure switch Series SWDN



1 = Brown (+)
2 = White (OUT 2)
3 = Blue (-)
4 = Black (OUT 1)
Analogic output = Orange



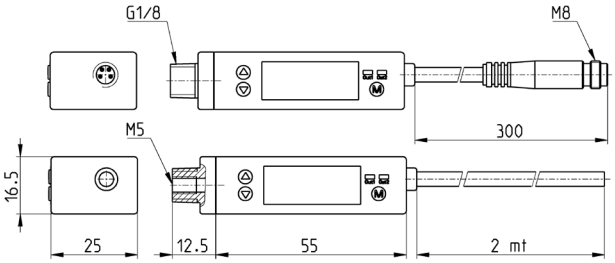

Mod.
SWDN-V01-P3-2
SWDN-V01-P4-2
SWDN-V01-P4-M
SWDN-P10-P3-2
SWDN-P10-P4-2
SWDN-P10-P4-M

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

TECHNICAL DATA


	SWDN-V01-	SWDN-P10-...
Rated pressure range (set-value)	-1 ÷ 1 bar	0 ÷ 10 bar
Setting pressure range (it can be displayed on the screen)	-1 ÷ 1 bar	-1 ÷ 10 bar
Withstand (Maximum) pressure	3 bar	15 bar
Fluid	Air, non-corrosive gases, incombustible gases	Air, non-corrosive gases, incombustible gases
Set pressure resolution:	0,1 kPa - 0,001 Kgf/cm² 0,001 bar 0,01 Psi 0,1 InHg 1 mmHg 0,1 mmH2O	- 0,001 MPa 0,01 Kgf/cm² 0,01 bar 0,1 Psi - - -
Power supply voltage	12-24 VDC ± 10%, ripple (P-P) 10% or less	12-24 VDC ± 10%, ripple (P-P) 10% or less
Current consumption	≤ 55mA	≤ 55mA
PNP switch output	2 Outputs with open collector max. load current of 100mA max. power supply voltage of 24VDC residual voltage ≤ 1V (with load current of 80mA)	2 Outputs with open collector max. load current of 100mA max. power supply voltage of 24VDC residual voltage ≤ 1V (with load current of 80mA)
Repeatibility (switch output)	≤ ± 0,2% F.S. ± 1 digit	≤ ± 0,2% F.S. ± 1 digit
Analog output (where foreseen)	1 - 5V ± 5% F.S. (within the linear range: ≤ ± 1% F.S.)	1 - 5V ± 2,5% F.S. (within the linear range: ≤ ± 1% F.S.)
Hysteresis mode **Window comparator mode**	Adjustable Fixed (3 digits)	Adjustable Fixed (3 digits)
Response time	≤ 2,5ms (chattering-proof function: 24ms, 192ms and 768ms)	≤ 2,5ms (chattering-proof function: 24ms, 192ms and 768ms)
Output short circuit protection	YES	YES
7 segment LED display	3 ½ digit (sampling rate of 5 times/sec)	3 ½ digit (sampling rate of 5 times/sec)
Indicator accuracy	≤ ± 2% F.S. ± 1 digit (ambient temperature: 25 ± 3°C)	≤ ± 2% F.S. ± 1 digit (ambient temperature: 25 ± 3°C)
Indicator	Green LED (OUT1), red LED (OUT2)	Green LED (OUT1), red LED (OUT2)
Protection class	IP40	IP40
Temperature	Operation: 0 ÷ 50°C Storage: -20 ÷ 60°C (without condensation or freezing)	Operation: 0 ÷ 50°C Storage: -20 ÷ 60°C (without condensation or freezing)
Relative humidity	Operation/Storage: 35 ÷ 85% (without condensation)	Operation/Storage: 35 ÷ 85% (without condensation)
Withstand (Max.) voltage	1000 VAC in 1 min (between case and lead wire)	1000 VAC in 1 min (between case and lead wire)
Insulation resistance	50MΩ min. (at 500VDC between case and lead wire)	50MΩ min. (at 500VDC between case and lead wire)
Vibration	Total amplitude 1.5 mm 10Hz-55Hz-10Hz scan for 1 minute 2 hours each direction of X, Y and Z	Total amplitude 1.5 mm 10Hz-55Hz-10Hz scan for 1 minute 2 hours each direction of X, Y and Z
Shock	980 m/s² (100G) 3 times each direction of X, Y and Z	980 m/s² (100G) 3 times each direction of X, Y and Z
Changes due to temperature	≤ ± 2% F.S. of detected pressure (25°C) within the operating temperature range	≤ ± 2% F.S. of detected pressure (25°C) within the operating temperature range
Port size	G1/8 - M5	G1/8 - M5
Lead wire	Oil-resistance cable (0,15 mm²)	Oil-resistance cable (0,15 mm²)
Weight	About 67 g for the version with 2-meter lead wire About 35 g for the version with male connector	About 67 g for the version with 2-meter lead wire About 35 g for the version with male connector


Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com


Extension with M8 4-pin female connector



With PU sheathing, non shielded cable.
Protection class: IP65.

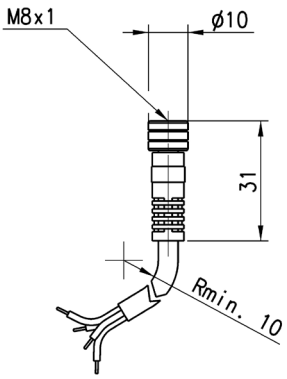

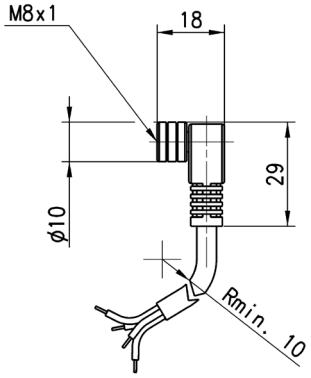



Mod.	Type of connector	Cable length [m]
CS-DF04EG-E200	Straight	2
CS-DF04EG-E500	Straight	5
CS-DR04EG-E200	90°	2
CS-DR04EG-E500	90°	5

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com