F Series	Applicable Cylinder	CKL2, LCG, LCM, LCR, MDC2, MSD, MSDG-L, MVC, RCS2, SSD2, STM, Gripper (LSH, BSA2, LHA)

Flexible lead wires are used as standard.

*Some bore sizes cannot be combined.



F□S



F□V

F□H



F□YV
F3PV



F□YH
F3PH


Specifications

Item	Reed 2-wire type	Solid state 2-wire type		Solid state 3-wire type		
	F0H/V	F2H/V, F2S	F2YH, F2YV	F3H/V, F3S	F3PH/V	F3YH, F3YV
Applications	For programmable controller only			For programmable controller, relay		
Output method	–			NPN output	PNP output	NPN output
Power supply voltage	–			10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	24 VDC ±10%	10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA (*1)			50 mA or less		
Current consumption	–			10 mA or less at 24 VDC		
Internal voltage drop	4 V or less			0.5 V or less	0.5 V or less at 30 mA	0.5 V or less
Indicator Lamp	Yellow LED (Lights up when ON) *3		Red/Green LED (Lights up when ON)	Yellow LED *3 (Lights up when ON)	Yellow LED (Lights up when ON)	Red/Green LED (Lights up when ON)
Leakage current	1 mA or less			10 μA or less		
Lead wire length	1 m (Flexible, oil-resistant vinyl cabtyre cord 2-core 0.15 mm²)			1 m (Flexible, oil-resistant vinyl cabtyre cord 3-core 0.15 mm²)		
Shock resistance	294 m/s²	980 m/s²				
Insulation resistance	20 MΩ or more with 500 VDC megger					
Dielectric strength	No abnormality when AC1000 V is applied for 1 minute					
Ambient Temperature	-10 to +60°C					
Protection structure	IEC standard IP67, JIS C0920 (Immersible type)					
Contact protection circuit *4	None	–				
Weight	1 m: 10 g 3 m: 29 g			1 m: 10 g 3 m: 29 g		


*1: The maximum load current for F2H and F2 V is 20 mA at 25°C. If the switch operating ambient temperature is higher than 25°C, it will be lower than 20 mA. (It will be 5 to 10 mA at 60°C.)
*2: For F2S and F3S, when mounting two switches in one groove for both-end detection, please mount them so that the set screw parts of each switch face outward.
*3: The indicator light for F2S and F3S is red.
*4: For contact protection measures, see P. 1026.
*5: Flexible lead wires are used.

Outline Dimension Drawing


●F□S series (Lead wire vertical extraction short stroke detection type)

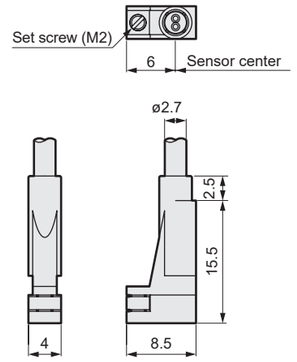


●F□H series (Straight lead wire type)




●F□V series (L-shaped lead wire type)



●F□YH / F3PH series (Straight lead wire type)

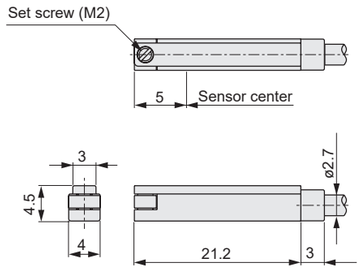

●F□YV / F3PV series (L-shaped lead wire type)



Switch internal circuit diagram

