# Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N3A25A020

*Datasheet creation date: 19/05/2026 09:36*

*Check the most updated document online* *click here*




## TECHNICAL DATA

| | |
|---|---|
| **Series (mm)** | 24 |
| **Diameter (mm)** | 25 |
| **Version** | N = standard |
| **Operation** | 2 = double acting, through rod |
| **Materials** | A = rolled stainless steel stem - stainless steel jacket |
| **Construction** | A = ring nut V + rod nut U |
| **Stroke (mm)** | 20 |
| **Seal options** | = standard |
| **Rod length (mm)** | 0 |

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at http://catalogue.camozzi.com/.

# Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N3A25A020

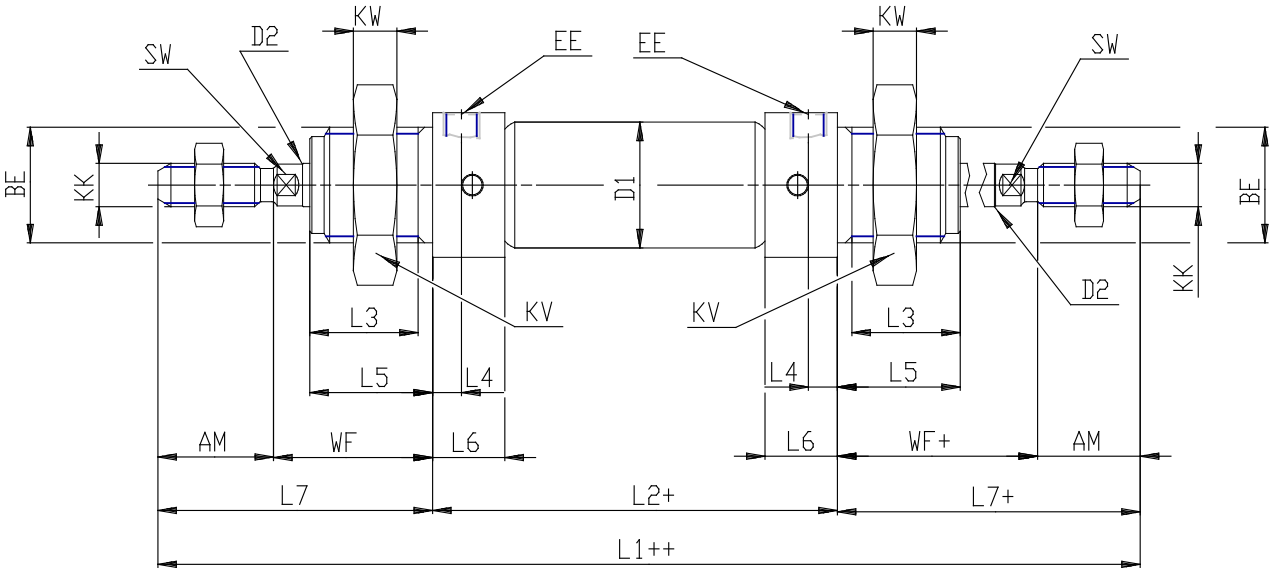


## DIMENSIONS

| | |
|---|---|
| **EW (mm)** | 16 |
| **KW (mm)** | 10 |
| **BE** | M22x1,5 |
| **KK** | M10x1,25 |
| **ØCD (mm)** | 8 |
| **D1 (mm)** | 27.0 |
| **EE** | G1/8 |
| **ØD2 (mm)** | 10 |
| **L1 (mm)** | 209.5 |
| **XC (mm)** | 0 |
| **L2 (mm)** | 89.5 |
| **AM (mm)** | 22 |
| **L3 (mm)** | 20 |
| **L4 (mm)** | 8.0 |
| **L5 (mm)** | 22 |
| **L (mm)** | 12 |
| **WF (mm)** | 28 |
| **L6 (mm)** | 16 |
| **L7 (mm)** | 50 |
| **KV (mm)** | 32 |
| **SW (mm)** | 9 |
| **D (mm)** | 27.0 |
| **D3 (mm)** | 27 |

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at http://catalogue.camozzi.com/.