Minicylinders - Series 16 - 23 - 24 - 25

Product code: 25N2A20A025W

Datasheet creation date: 19/05/2026 09:45

Check the most updated document online *click here*




TECHNICAL DATA

Series (mm)	25
Diameter (mm)	20
Version	N = standard
Operation	2 = double acting
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + rod nut U
Stroke (mm)	25
Seal options	W = all seals in FKM + 130 ° C
Rod length (mm)	0

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at http://catalogue.camozzi.com/.

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 25N2A20A025W

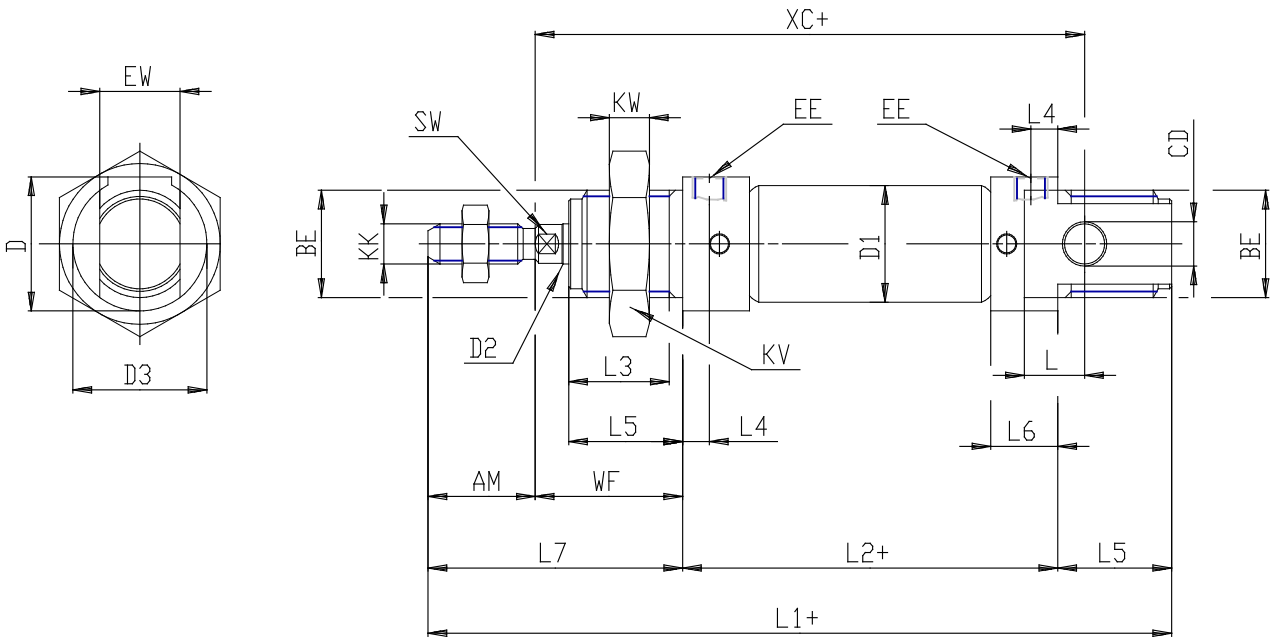

DIMENSIONS

EW (mm)	16
KW (mm)	10
BE	M22x1,5
KK	M8x1,25
ØCD (mm)	8
D1 (mm)	22.0
EE	G1/8
ØD2 (mm)	8
L1 (mm)	157.0
XC (mm)	120
L2 (mm)	93.0
AM (mm)	20
L3 (mm)	18
L4 (mm)	8.0
L5 (mm)	20
L (mm)	12
WF (mm)	24
L6 (mm)	16
L7 (mm)	44
KV (mm)	32
SW (mm)	7
D (mm)	27.0
D3 (mm)	27

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at http://catalogue.camozzi.com/.