Cylinders ISO 15552 (ex DIN/ISO 6431 / VDMA 24562) - Series 41K

Product code: 41K2P160A0080

Datasheet creation date: 20/05/2026 02:40

Check the most updated document online click here




TECHNICAL DATA


SERIE (Series / mm)	41
VER (Version)	K = standard, magnetic
FUNZ (Operation)	2 = double-acting (front and rear cushioning)
MAT (Materials)	P = rolled stainless steel rod AISI 420B anodized aluminium round tube NBR seals
PHY (Diameter / mm)	160
TYP (Construction)	A = standard
HUB (Stroke / mm)	80
OPZIONI (Seal options)	= standard
LSTELO (Rod length / mm)	0
LSTELO2 (Rod lenght 2 / mm)	0
OPZIONI2 (Protection options)	= standard
CERTIFICAZIONI (Certifications)	= standard

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Cylinders ISO 15552 (ex DIN/ISO 6431 / VDMA 24562) - Series 41K

Product code: 41K2P160A0080

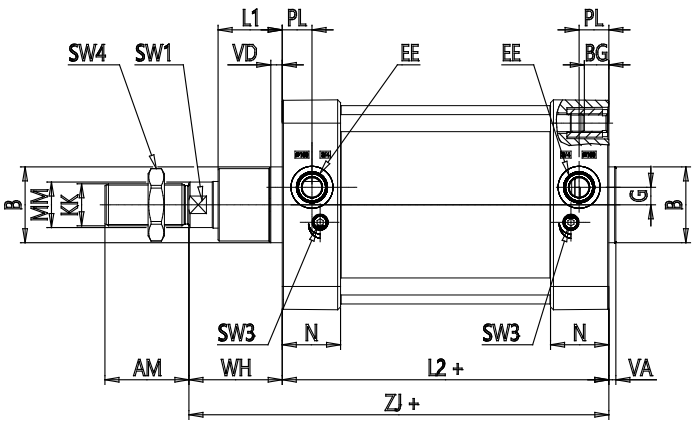

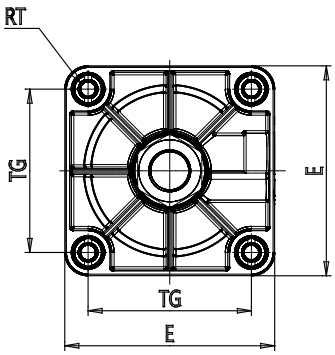

DIMENSIONS

Ø MM (mm)	40
KK	M36x2
Ø D11 (mm)	65
PL (mm)	25.5
G (mm)	15
L1 (mm)	55
AM (mm)	72
VA (mm)	6
EE	G3/4
WH (mm)	80
L2 (mm)	180
ZJ	260
VD (mm)	10
N (mm)	50
RT	M16
BG (mm)	24
TG (mm)	140
E (mm)	180
SW1 (mm)	36
SW3 (mm)	4
SW4 (mm)	55
Cushioning stroke (mm)	33
XV1±2 (mm)	145

XV2±2 (mm)	170
XV3±2 (mm)	195
h14 (mm)	200
TK (mm)	40
e9 (mm)	32
h14 (mm)	32
UW (mm)	200

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com.
This document contains a brief description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com