ONE-TOUCH FITTINGS


Application

- One-touch joints used in pneumatic piping.
- Used for a wide variety of models to meet all needs.

Feature

- Easy to connect/disconnect tube by one touch.
- PC type is useful for piping in confined space, given its six-angle wrench processing inside.
- Elliptical sleeve makes it possible to apply and remove the tube easily in confined space.
- Fittings are equipped with a Gasket, O-ring and Teflon-Treatment already on the thread.

Structural Diagram

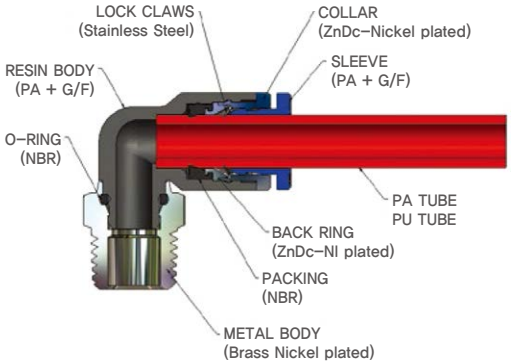

Specification

Fluid	Air(No other gases or liquids)	
Working Pressure Range	0~284PSI	0~20Kgf/㎠(0~1960kPa)
Negative Pressure	-29.5inHg	-750mmHg(10Torr)
Temperature Range	32~176℉	0~80℃
Applicable Tube Material	Polyurethane and Nylon	



Case In Use

▶ POC Model

- The hexagonal hole of the inside body makes it possible to tighten the fitting with a hexagonal wrench.
- A hexagonal wrench must be used due to the round exterior.

Product Code System

GPC 08 - 02 (①) (②) (③)

GPC 08 - 02 (GR) (①) (②) (③) (④)

① Type
② Tube Dia(ØD)

Code	04	06	08	10	12	16
Dia	Ø4	Ø6	Ø8	Ø10	Ø12	Ø16

③ Thread Size(T) *Metric Thread & R(PT) Thread

	Metric size		Taper Pipe Thread			
Code	M5	M6	01	02	03	04
Size	M5X0.8	M6X1.0	R1/8	R1/4	R3/8	R1/2

④ Color (Gray fitting can be produced)

	None	(GR)
Color	Black	Gray



⚠ CAUTION

- Be sure to read the "Common Precautions" and the "Using Precautions of Fitting Series" (P14) before using.
- In putting tube on the fitting, be sure to push it deeply into the inside. In case of incorrect installation, there is a risk of air leakage or loose tube.


⚠ WARNING

- Be sure to confirm that proper conditions are met(specifications), otherwise there may be air leakage by damage on the fitting body.

PIG

Reducer Tube Splicer



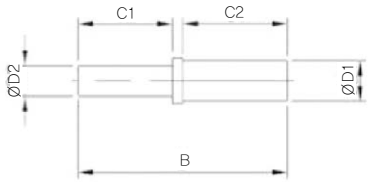

MODEL [ØD-T] Tube (Metric)-Thread(R) (mm)

CODE	MODEL	ØD1	ØD2	B	C1	C2	Orifice (Ømm)	W.G(g)	Q'ty/Inbox
401320004300	PIG 06-04	6	4	37.5	18.6	17.7	2	0.7	100
401320004400	PIG 08-04	6	4	44	22	19	2	0.9	100
401320004500	PIG 08-06	8	6	41.2	20.6	18.6	4	1.5	100
401320004600	PIG 10-06	10	6	48	25	20	4	1.6	100
401320004700	PIG 10-08	10	8	45	22.6	20.4	5	2.8	100
401320004800	PIG 12-08	12	8	52	27	22	5	2.6	50
401320005000	PIG 12-10	12	10	49.8	25.4	22.4	5.5	4.9	50
401320005100	PIG 16-12	16	12	54	27	25	9	8.2	50