SILENCERS

Application

• Used for suppressing the noise of air release, applied to exhausted port of machine.

Feature


• Excellent noise suppression effect.
• Several options of materials (Brass, Stainless Steel, Plastic, Al).
• High durabiLity and wide appLications.
• Compact design is suitable for installing in confined space.





Case In Use

• Applied to exhausted port of machine.
• Sintering Silencer for anti-corrosion & high temperature place and ST Silencer for superior silence & contaminated place.

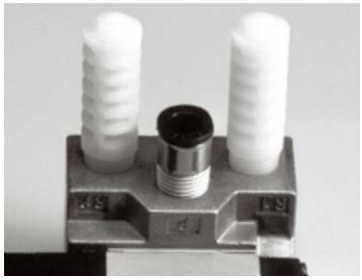

Product Code System

SL 01
① ②

① Type
② Thread Size

Thread Size	Metric Thread	Tape Paralle Thread								
Code	M5	01	02	03	04	06	08	10	12	16
Size	M5	R1/8	R1/4	R3/8	R1/2	R3/4	R1	R1 1/4	R1 1/2	R2


Thread Size	Tape Paralle Thread					
Code	G01	G02	G03	G04	G06	G08
Size	G1/8	G1/4	G3/8	G1/2	G3/4	G1

⚠ CAUTION

- Be sure to read the "Common Precautions" and "Using Precautions of Fitting Series" (P14) before using.
- Replace silencer after moderate use.
- Seal with Teflon, failure to do so will cause air leakage.
- Clean regularly to maintain good air release efficiency.
- Fastening the thread by force will cause damage on the body.

SL





▶Application : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.

▶Material : BRASS

▶Feature : • Silencer with Brass Sintering which is not burn is strong in heat and high pressure.

CODE	MODEL	R	A	B	L	D	H	W.G(g)	Q'ty/Inbox
512310000001	SL M5	M5	4	3	20.7	4	9	3	100
512310000002	SL 01	R⅛	7	3.5	24.5	8	12	6	100
512310000003	SL 02	R¼	9.5	4	31.5	10	15	13	50
512310000004	SL 03	R⅜	10.5	5	39.9	12	19	22	50
512310000005	SL 04	R½	12	6	47.3	15	22	37	25
512310000006	SL 06	R¾	12	6.5	55.8	19	27	55	20
512310000007	SL 08	R1	14.5	7	70.5	32	36	122.5	8
512310000008	SL 10	R1¼	15	7.5	75.8	32	46	202.5	6
512310000009	SL 12	R1½	15	8	81.8	38	52	258	4
512310000010	SL 16	R2	16.5	9	105.3	50	64	415.5	2