

Common port 2 with coil clearance
**CAVITY: T-13A**

sunhydraulics.com/model/A5U

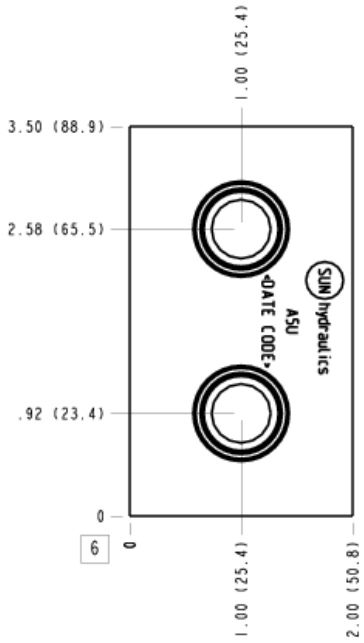


## CONFIGURATION

| | | |
|---|---|---|
| **(none)** | Modifier | 6061-T651 Aluminum, Buna-N |

This manifold is designed to be used with solenoid operated and electro-proportional cartridges. It incorporates extra material around the cavity to provide coil clearance.

## TECHNICAL DATA

| | |
|---|---|
| Body Type | Line mount |
| Interface | None |
| Body Features | Common port 2 with coil clearance |
| Mounting Hole Diameter | 7,1 mm |
| Mounting Hole Depth | Through |
| Mounting Hole Quantity | 2 |
| Open Cavities | 2 |
| Cavity | T-13A |
| Port Size | 3/8" BSPP |
| Model Weight | 0.66 kg. |

## NOTES

***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## PORT DESIGNATORS

| Modifiers | Ports |
|---|---|
| A5U, /10, /11, /S, /S3 | All Ports: 3/8" BSPP; |

## CONFIGURATION OPTIONS
## Model Code Example: A5U

### MODIFIER

- 6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


## MANIFOLD FACES

### FACE GRID


© 2026 Sun Hydraulics

| | | | |
|---|---|---|---|
| 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 |

## Face 6

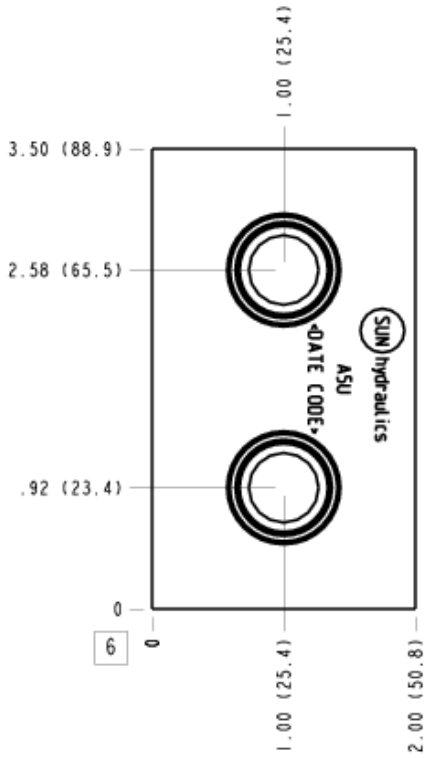



## Face 7

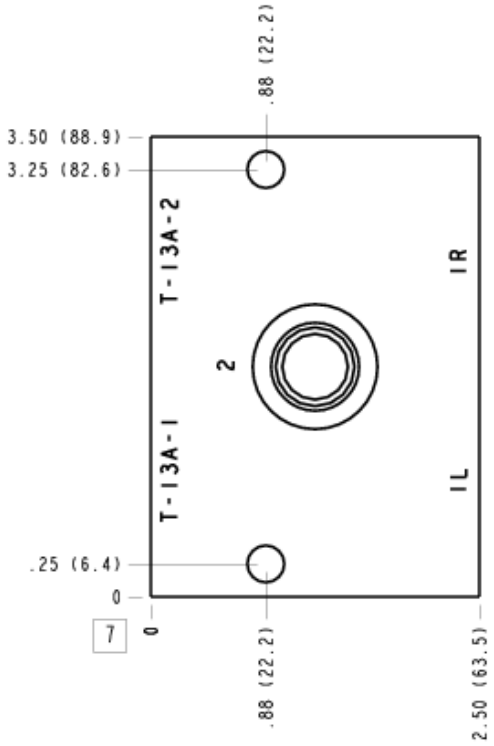


© 2026 Sun Hydraulics

## Face 8

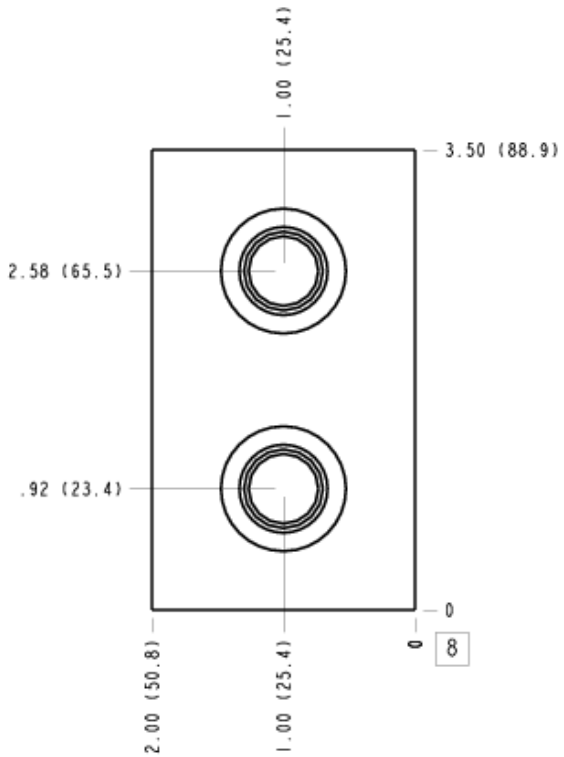


© 2026 Sun Hydraulics