




Counterbalance, On A and B, Cross-Piloted




Pilot-To-Open Check, On A and B, Cross-Piloted




Reducing, On A and B, drain to opposite port



Reducing/Relieving, On A and B, Tanks and Drains to Opposite Port



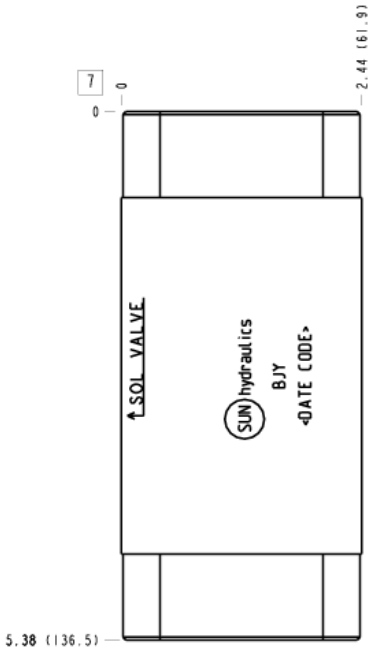

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05 - X&Y
Body Features	On A and B with cross pilot
Stack Height	63 mm
Seal Plate Included (see notes)	No
Open Cavities	2
Cavity	T-2A
Model Weight	1.14 kg.

NOTES

- Stack height value in technical data table includes seal retainer plate.
- This installation requires a retainer and seal kit which are purchased separately. See "Related Accessories" section.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
340-001	Pipe Plug	2

CONFIGURATION OPTIONS
Model Code Example: BJY

MODIFIER

	6061-T651 Aluminum, Buna-N
/11	6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10	6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S	65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S4	65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

FACE GRID


© 2025 Sun Hydraulics

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

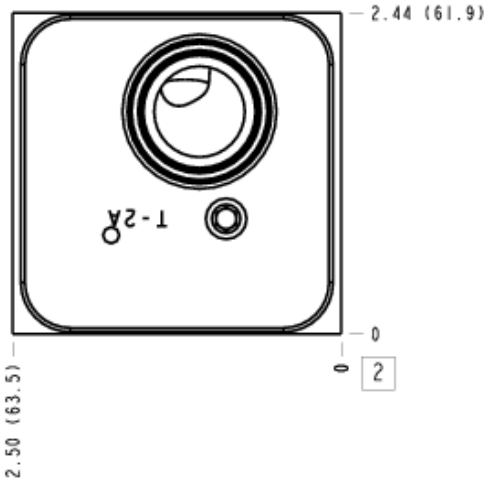


Face 5

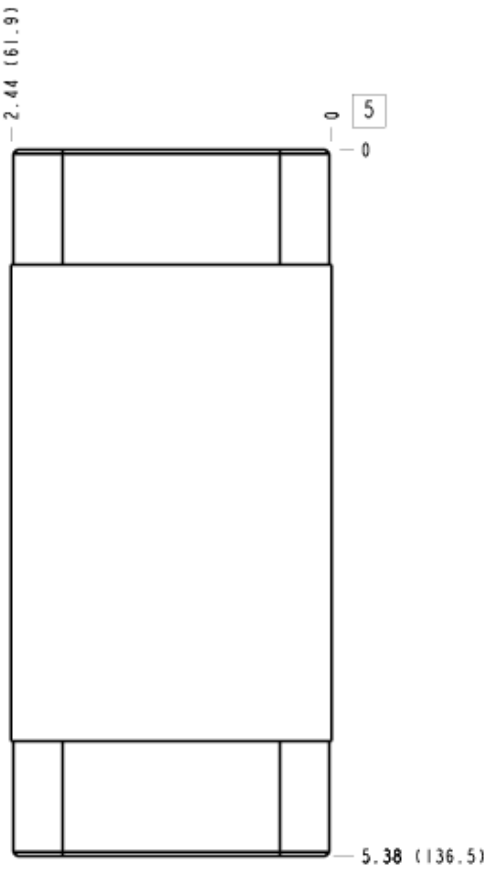


© 2025 Sun Hydraulics

Face 6

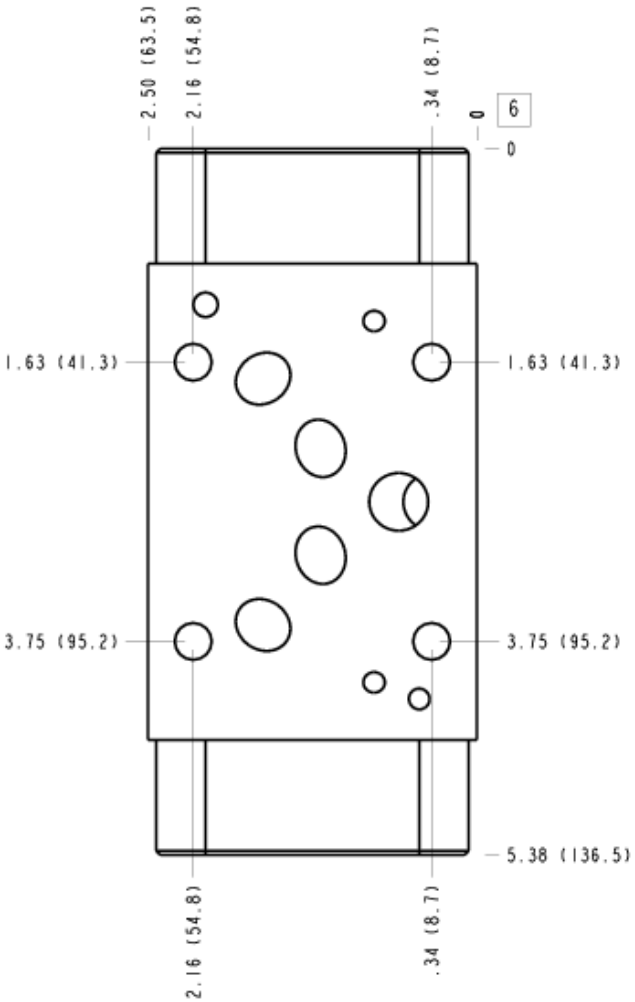


Face 7

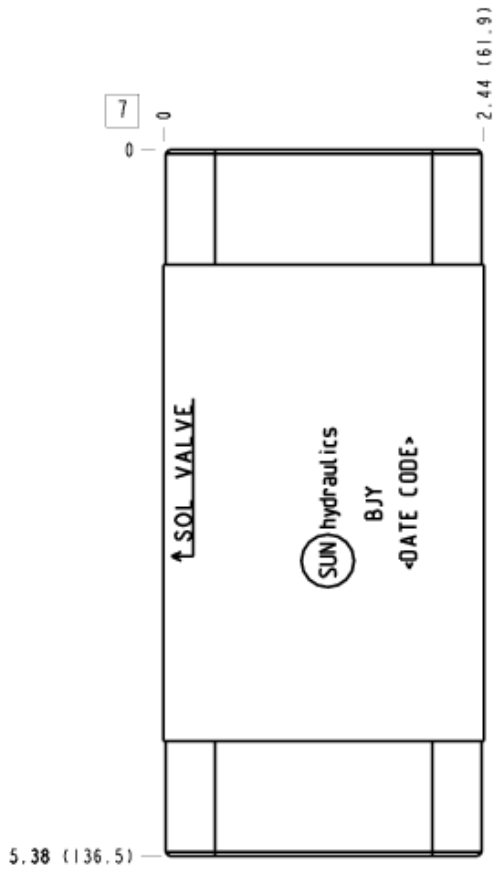


© 2025 Sun Hydraulics

Face 8

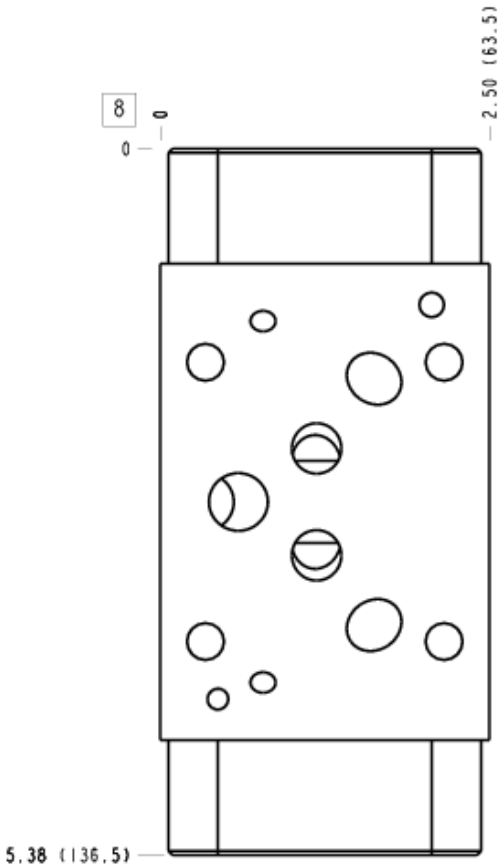

Face 10

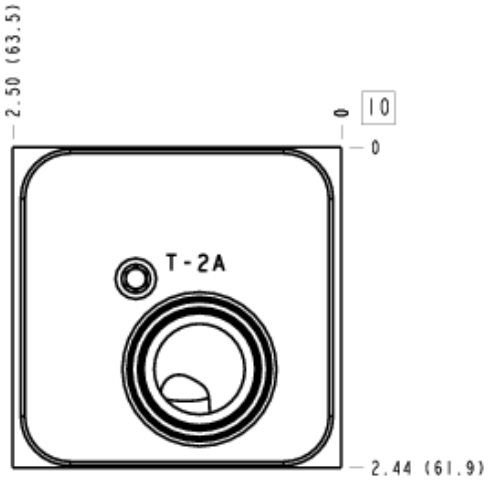

© 2025 Sun Hydraulics