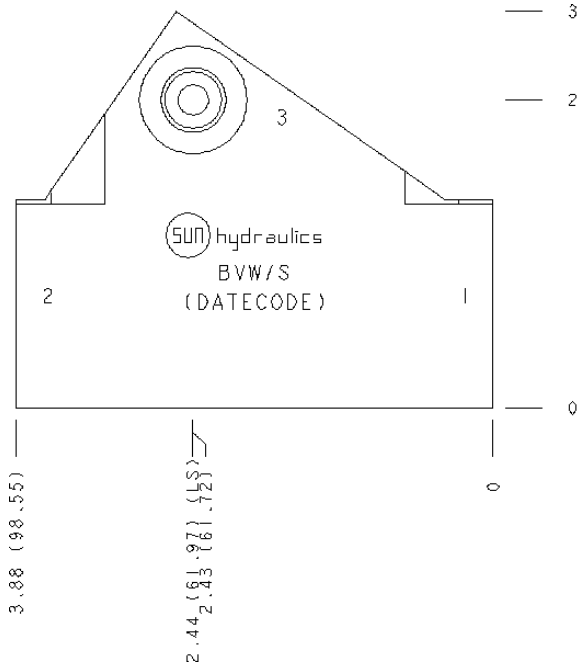



## CONFIGURATION

| | | |
|---|---|---|
| /S | Modifier | 65-45-12 Ductile Iron, Buna-N, Dewatering Oil |

## TECHNICAL DATA

| | |
|---|---|
| Body Type | Line mount |
| Interface | None |
| Body Features | Inline |
| Mounting Hole Diameter | 8.6 mm |
| Mounting Hole Depth | Through |
| Mounting Hole Quantity | 2 |
| Open Cavities | 1 |
| Cavity | T-2A |
| Port Size | 3/4" BSPP |
| Model Weight | 1.76 kg. |

## NOTES

***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2025 Sun Hydraulics

## PORT DESIGNATORS

| Modifiers | Ports |
|---|---|
| BVW, /10, /11, /S, /S3, /S4 | Ports 1 & 2: 3/4" BSPP; Port 3: 1/4" BSPP; |

## CONFIGURATION OPTIONS
## Model Code Example: BVW/S

**MODIFIER** **(/S)**

**/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

6061-T651 Aluminum, Buna-N

**/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

**/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

**/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

**/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black


**/S5** 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

## MANIFOLD FACES

### FACE GRID


| | | | |
|---|---|---|---|
| 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 |

### Face 2

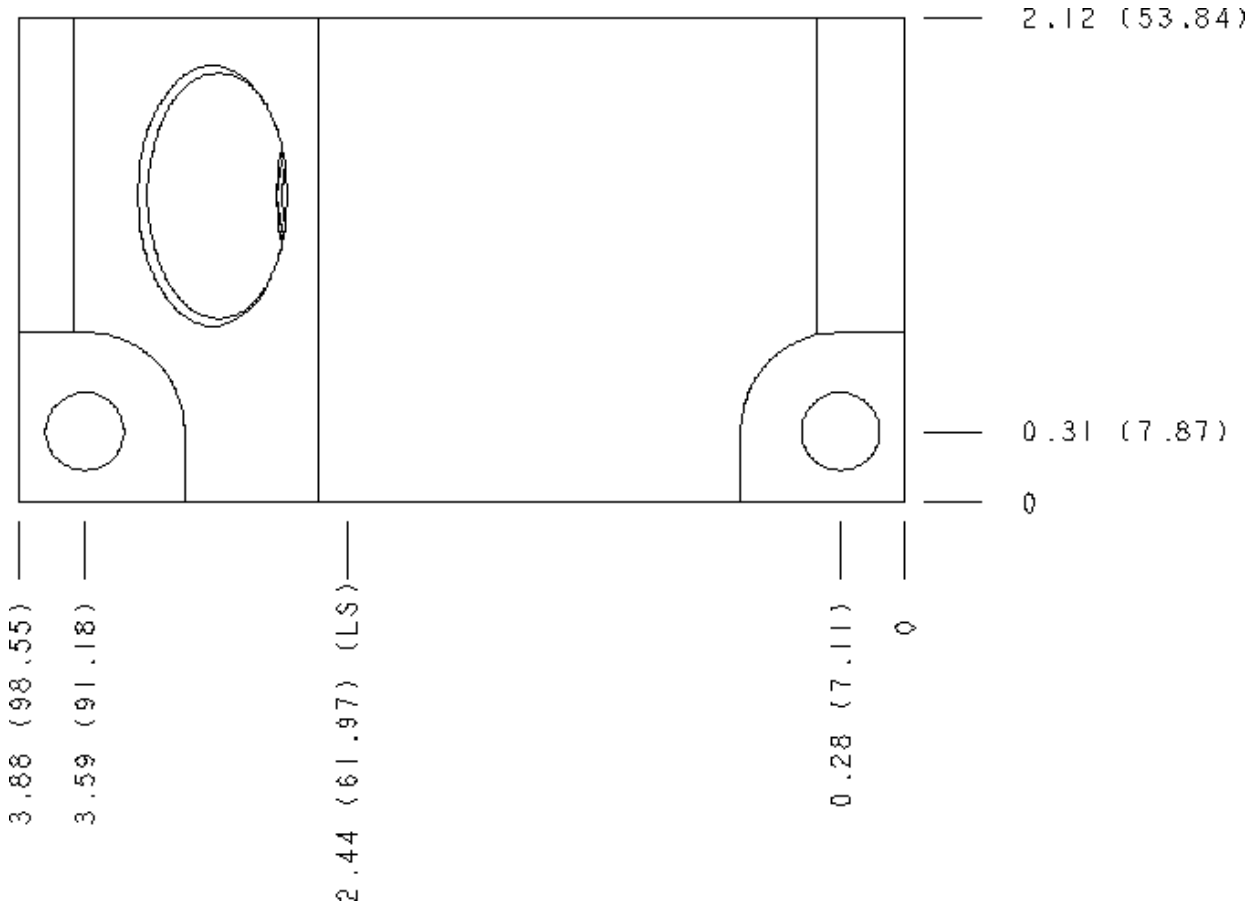



© 2025 Sun Hydraulics

## Face 5

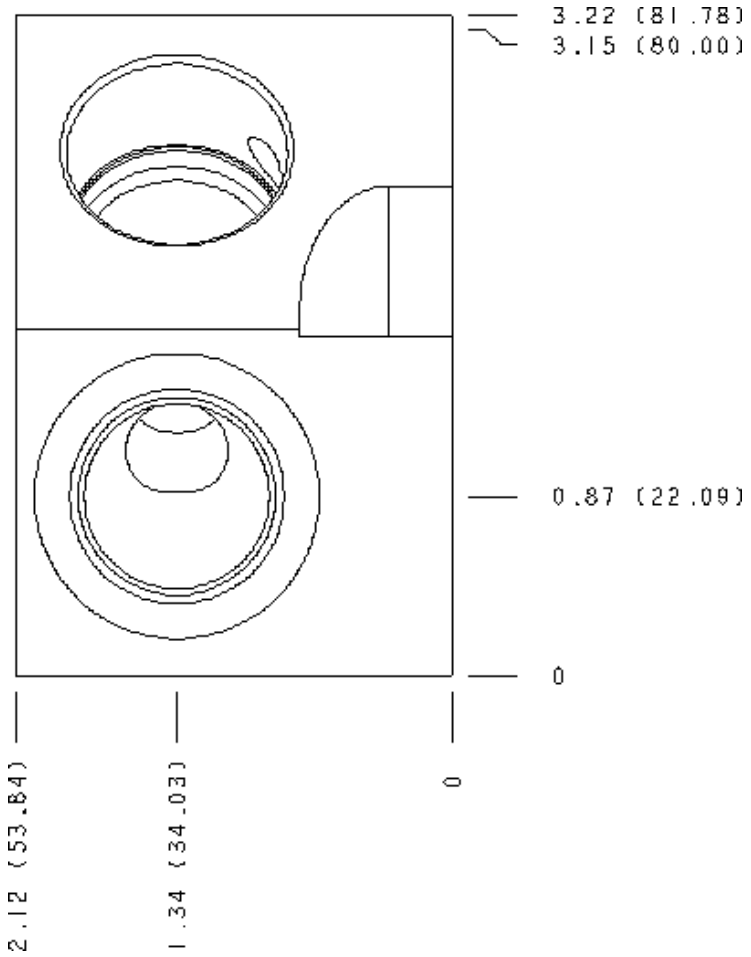



© 2025 Sun Hydraulics

## Face 6

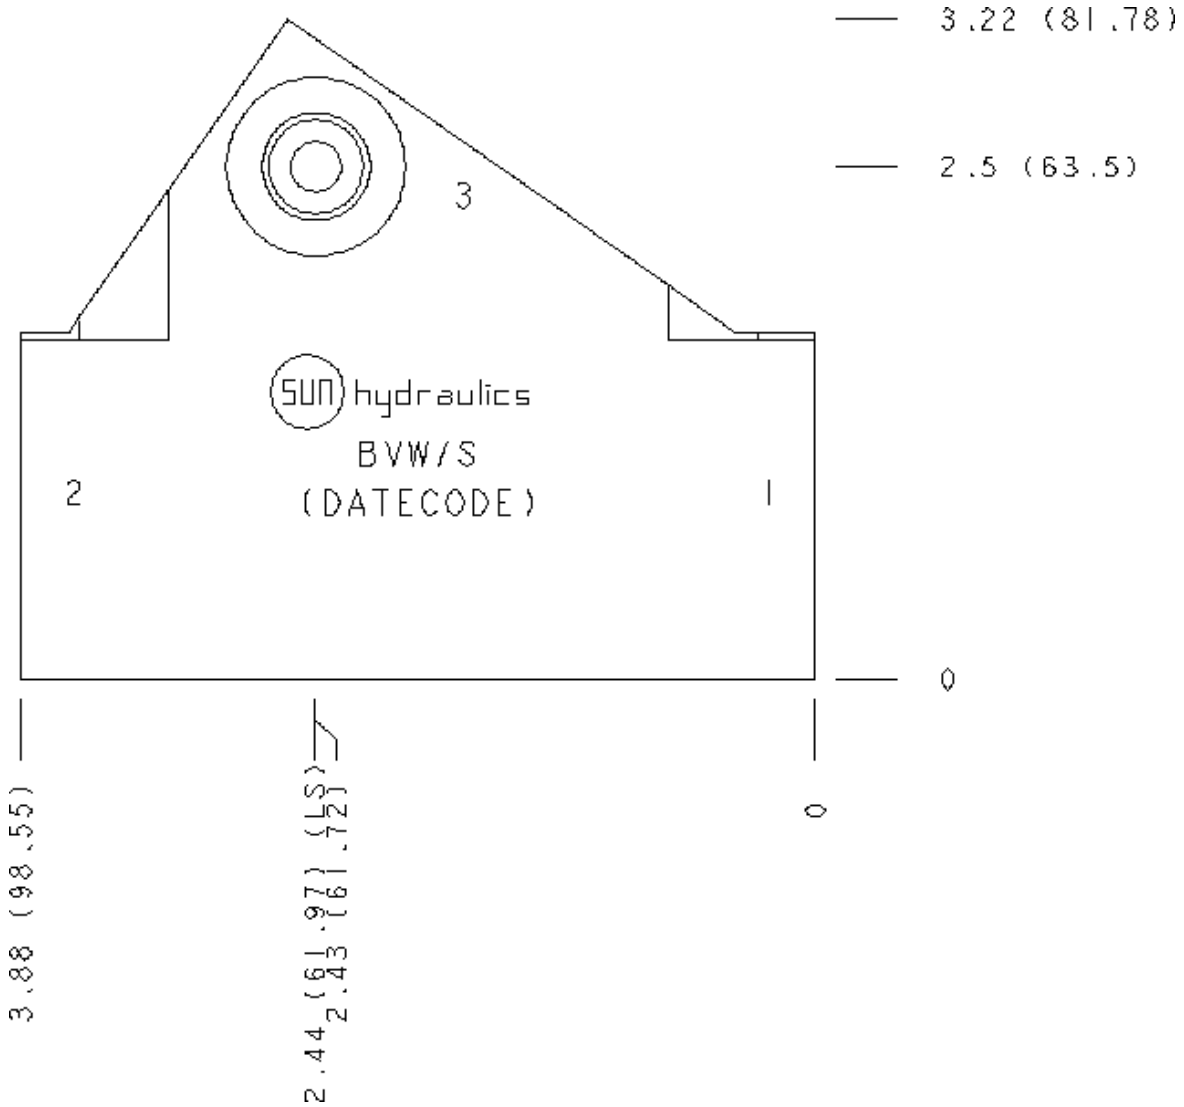


© 2025 Sun Hydraulics

## Face 7

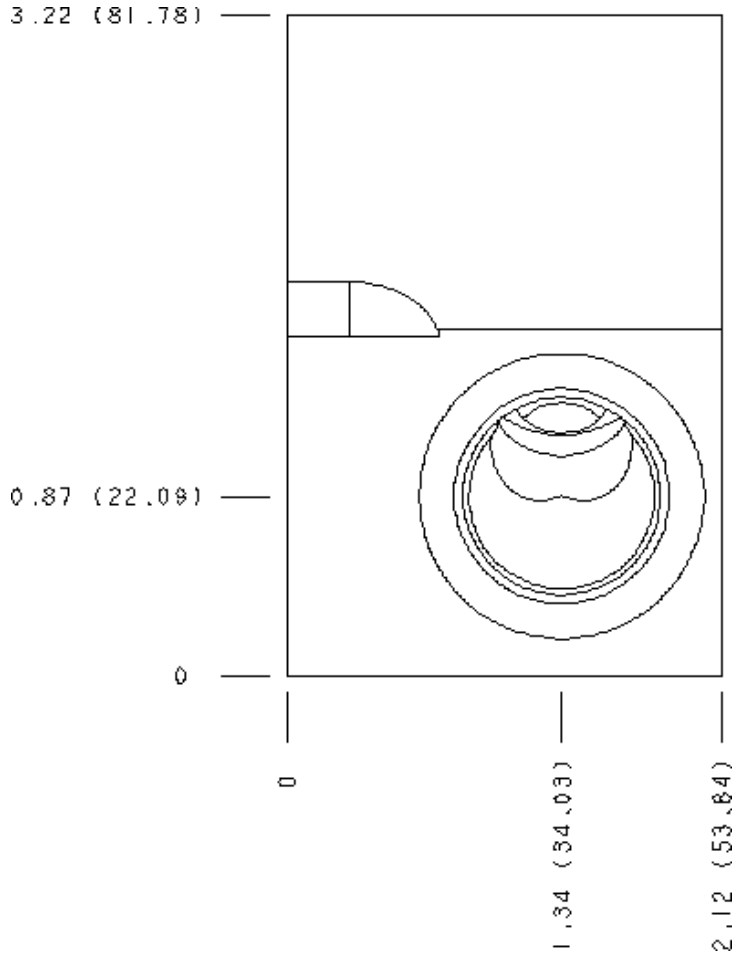


© 2025 Sun Hydraulics