

MODEL
CEW

Through port with gauge port
CAVITY: T-3A

sunhydraulics.com/model/CEW



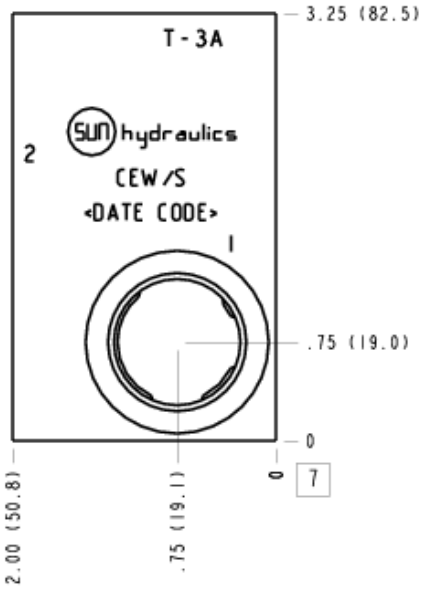

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Through port with gauge port
Mounting Hole Thread	M6x1.0 - 6H
Mounting Hole Depth	12,7 mm
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-3A
Port Size	3/4" BSPP
Model Weight	1.08 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
CEW, /10, /11, /S, /S3, /S4, /S5	Ports 1 & 2: 3/4" BSPP; Gage Ports: 1/4" BSPP;

CONFIGURATION OPTIONS
Model Code Example: CEWArray

MODIFIER (/S)

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel


© 2026 Sun Hydraulics

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

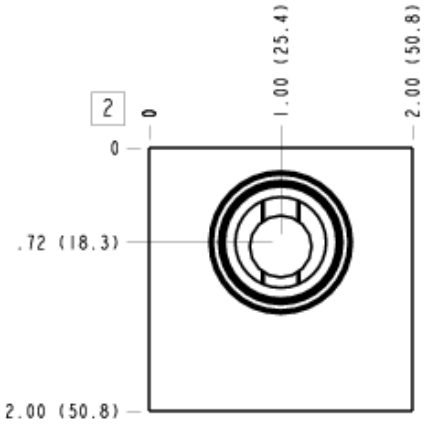


Face 5

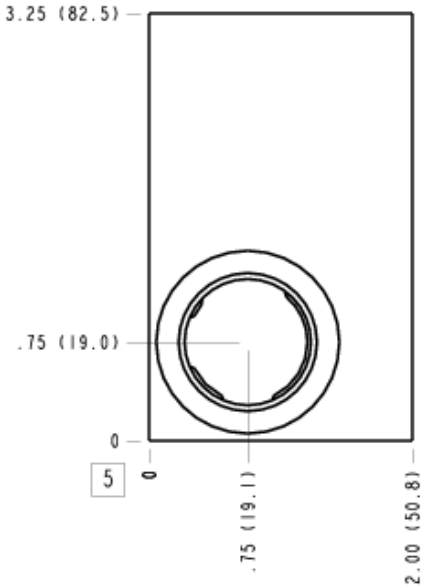


© 2026 Sun Hydraulics

Face 6

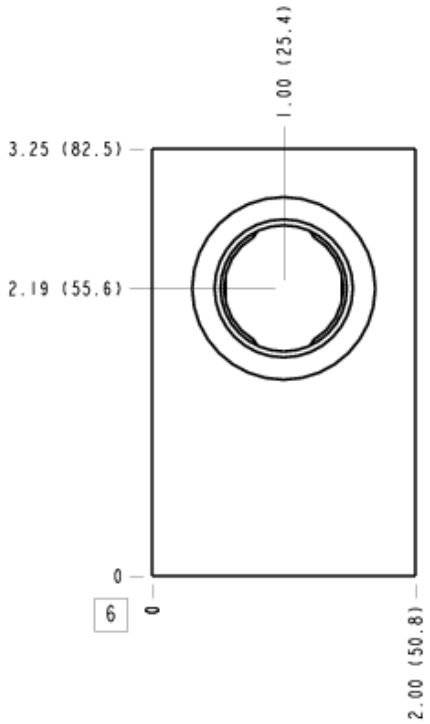


Face 7

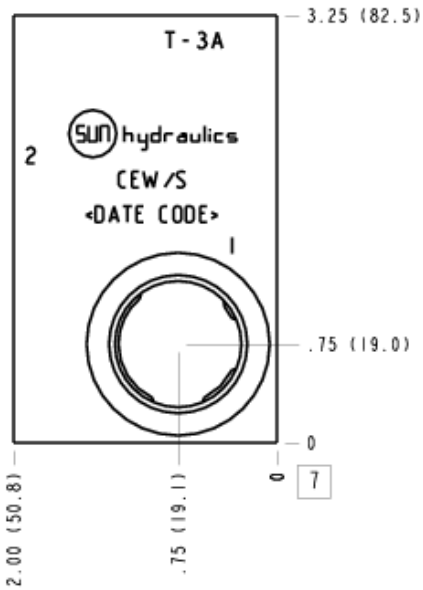


© 2026 Sun Hydraulics

Face 8

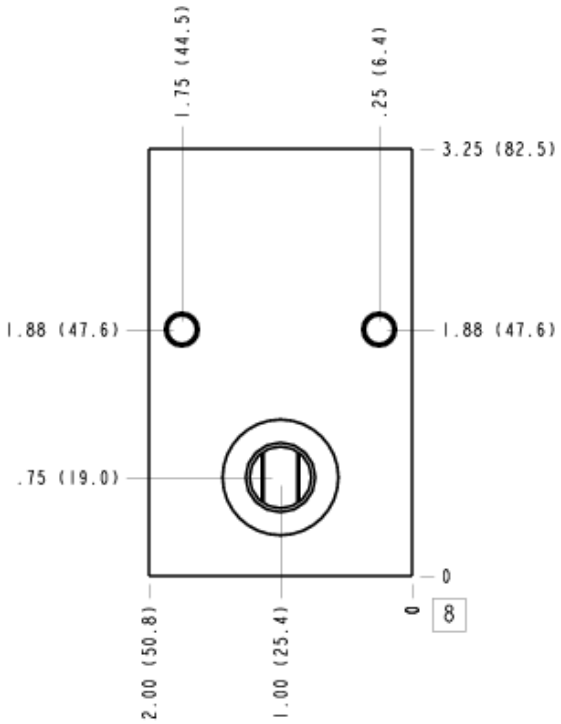

Face 10

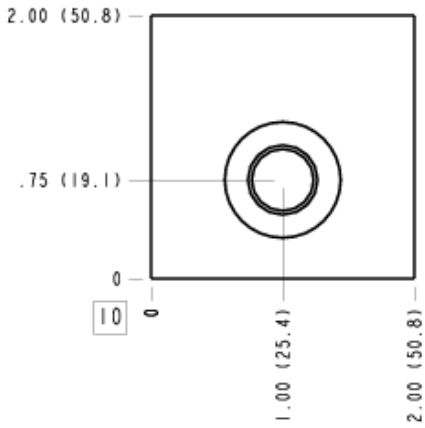

© 2026 Sun Hydraulics