


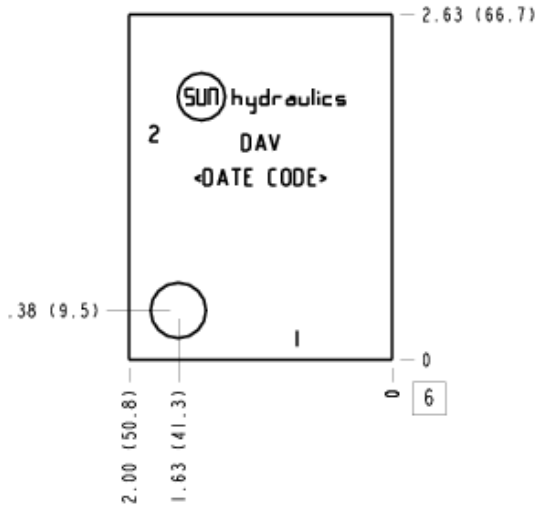

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Ninety degree
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	1
Open Cavities	1
Cavity	T-5A
Port Size	1/2" BSPP
Model Weight	0.25 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
DAV, /10, /11, /S, /S3	All Ports: 1/2" BSPP;

CONFIGURATION OPTIONS
Model Code Example: DAV

MODIFIER

- 6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

© 2025 Sun Hydraulics


Face 2

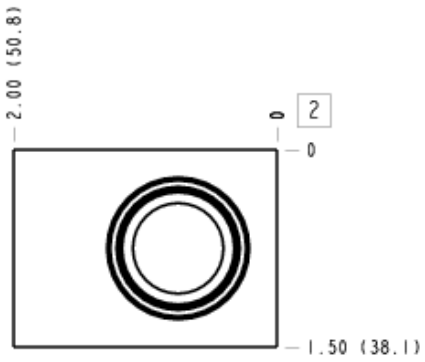

Face 5

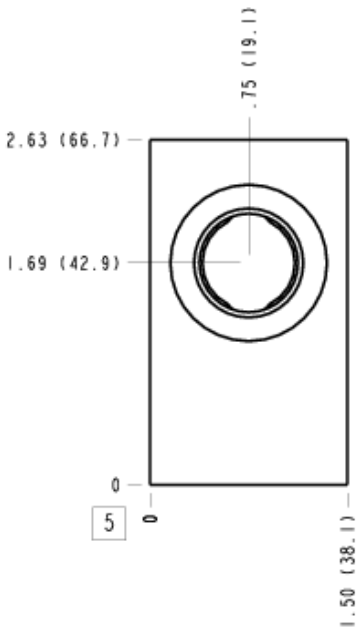


Face 6

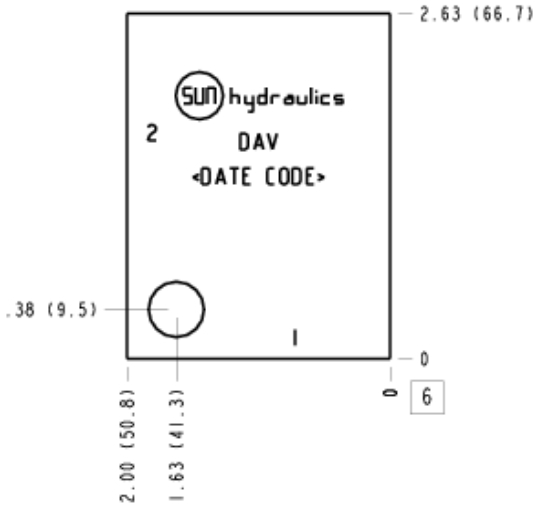


© 2025 Sun Hydraulics


Face 7

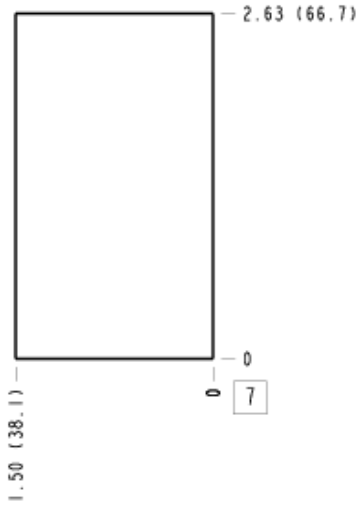

Face 8

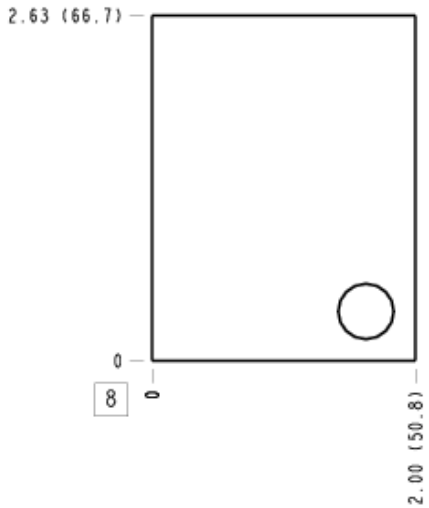

Face 10

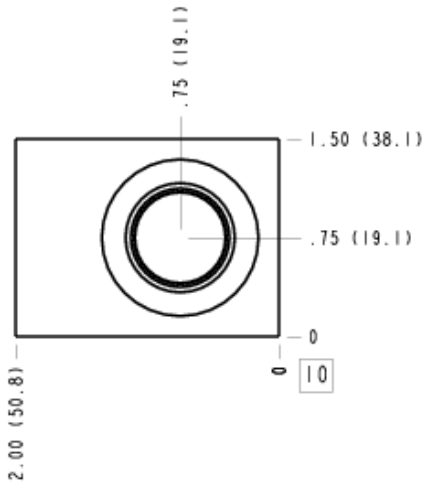

© 2025 Sun Hydraulics