




Counterbalance, On A and B, Cross-Piloted



Pilot Operated Check, On A and B, Cross-Piloted




Reducing, On A and B drained to opposite port



Reducing/Relieving, On A and B drain to opposite port

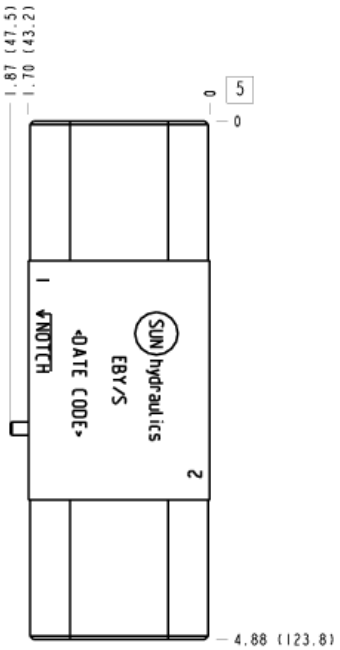


## TECHNICAL DATA

| | |
|---|---|
| Body Type | Sandwich |
| Interface | ISO 03 |
| Body Features | On A and B with cross pilot |
| Stack Height | 44,5 mm |
| Seal Plate Included (see notes) | Yes |
| Open Cavities | 2 |
| Cavity | T-11A |
| Model Weight | 1.22 kg. |

## CONFIGURATION

| | | |
|---|---|---|
| **/S** | Modifier | 65-45-12 Ductile Iron, Buna-N, Dewatering Oil |

## NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2024 Sun Hydraulics

## INCLUDED COMPONENTS

| Part | Description | Quantity |
|---|---|---|
| 500-001-012 | O-Ring | 4 |
| 700-002 | Seal Plate | 1 |
| 811-001-006 | Pin | 1 |
| 850-004-250 | Plug | 2 |

## CONFIGURATION OPTIONS
## Model Code Example: EBY/S

**MODIFIER** **(/S)**

**/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
6061-T651 Aluminum, Buna-N

**/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

**/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

**/V** 6061-T651 Aluminum, Viton

**/16** 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

**/15** 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

**/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black

**/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

**/Y** 65-45-12 Ductile Iron, Viton, Dewatering Oil

**/Y4** 65-45-12 Ductile Iron, Viton, Chem. Black


**/Y3** 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

## MANIFOLD FACES

### FACE GRID





### Face 2

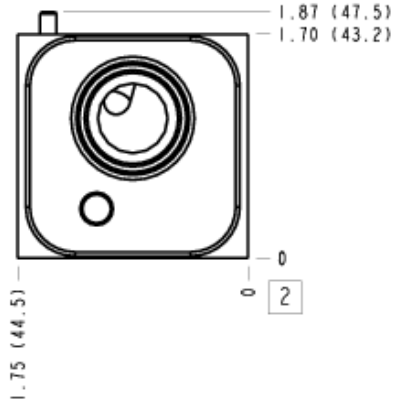



© 2024 Sun Hydraulics

## Face 5

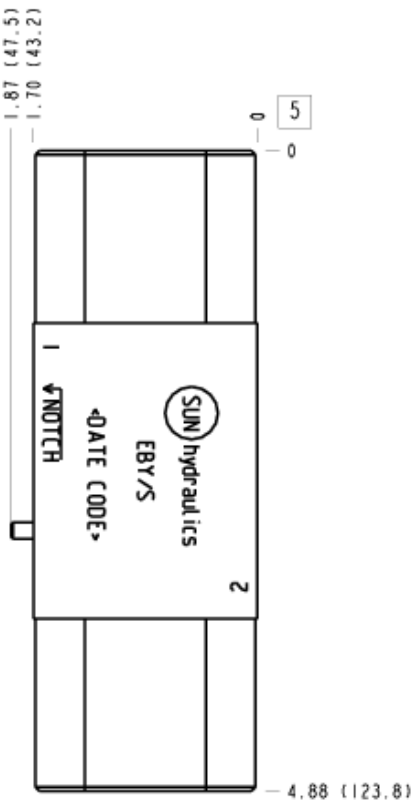



## Face 6

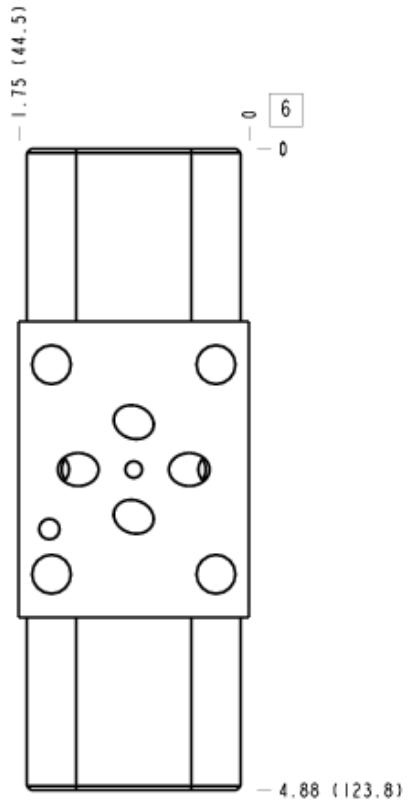



© 2024 Sun Hydraulics

## Face 7

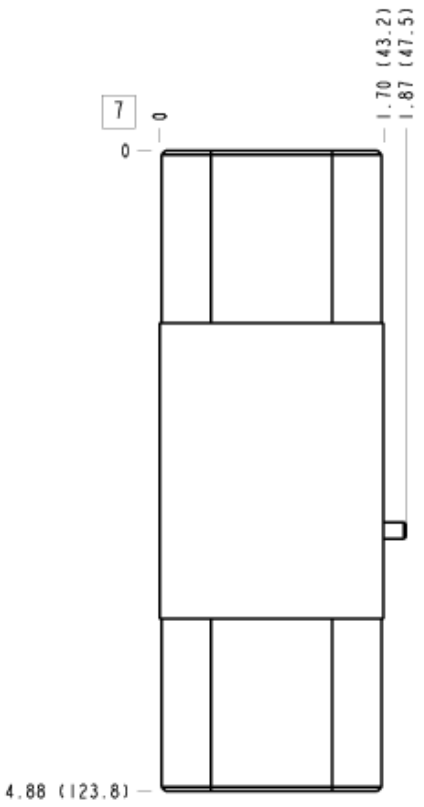



## Face 8

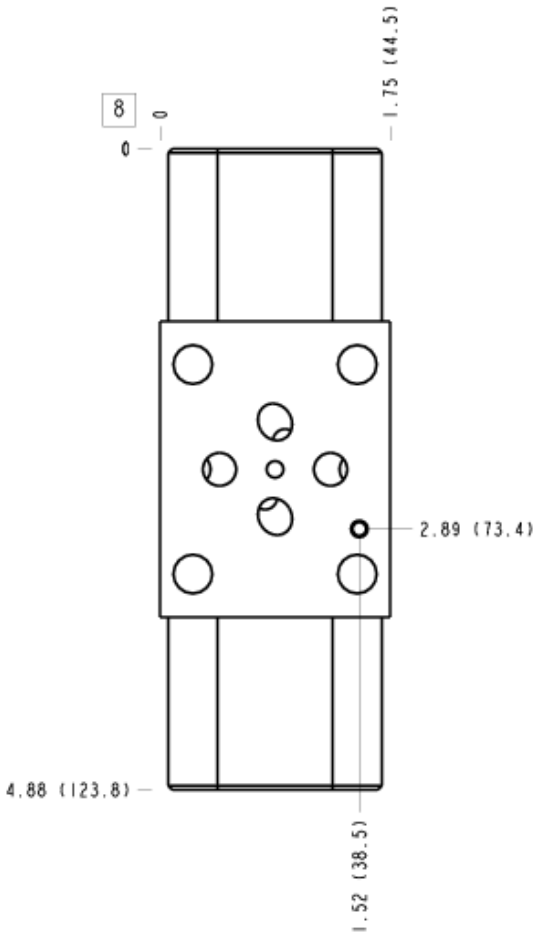


© 2024 Sun Hydraulics

## Face 10

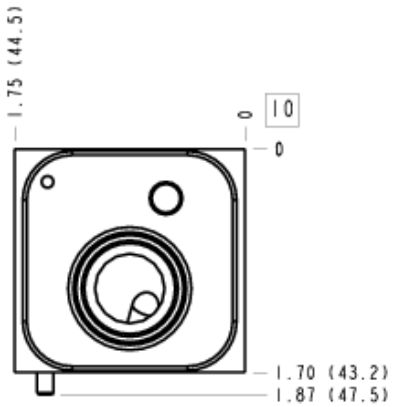


© 2024 Sun Hydraulics