




Reducing, On P, drain to T



Reducing/Relieving, On P tank to T



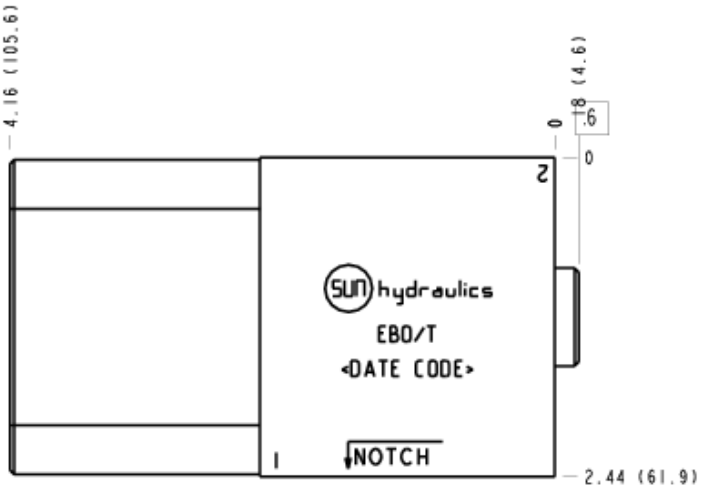

CONFIGURATION

/T	Modifier	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	On P, port 3 to T
Stack Height	63 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-2A
Port Size	1/4" NPTF
Model Weight	1.61 kg.

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2025 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
EBO, /10, /11, /15, /16, /V	Port G: 1/4" NPTF;
EBO/1A, /1B, /1F, /1G, /M, /Z	Port G: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	1
340-002	Pipe Plug	2
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS
Model Code Example: EBOArray

MODIFIER **(/T)**

/T 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/1A 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/1B 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/1F 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/1G 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/M 6061-T651 Aluminum, Metric, Buna-N

/V 6061-T651 Aluminum, Viton

/Z 6061-T651 Aluminum, Metric, Viton

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

/T3 65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer

/T4 65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black

/T5 65-45-12 Ductile Iron, Metric, Buna-N, Electroless Nickel

/W 65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil

/W3 65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer

/W4 65-45-12 Ductile Iron, Metric, Viton, Chem. Black

/W5 65-45-12 Ductile Iron, Metric, Viton, Electroless Nickel

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black


/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES


FACE GRID

© 2025 Sun Hydraulics


Face 2

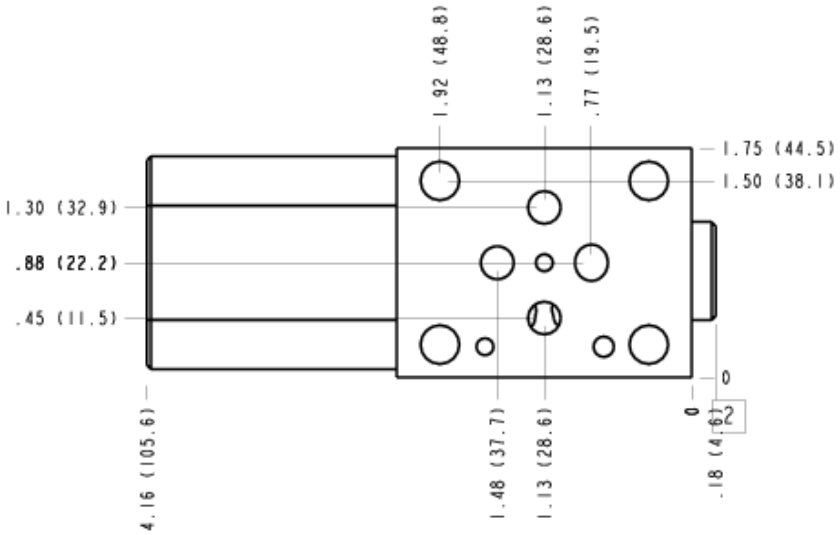

Face 5

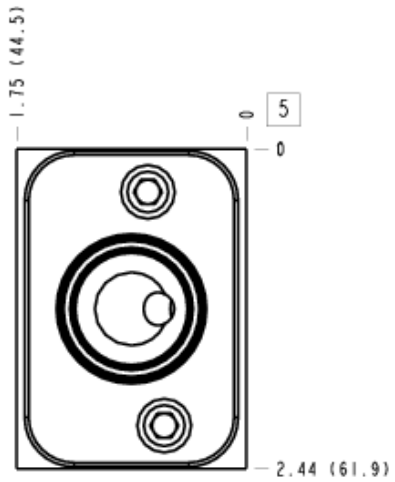


Face 6

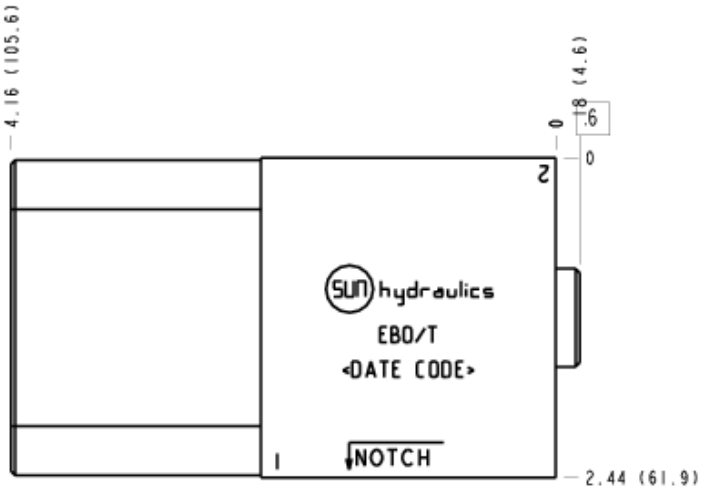


© 2025 Sun Hydraulics

Face 7

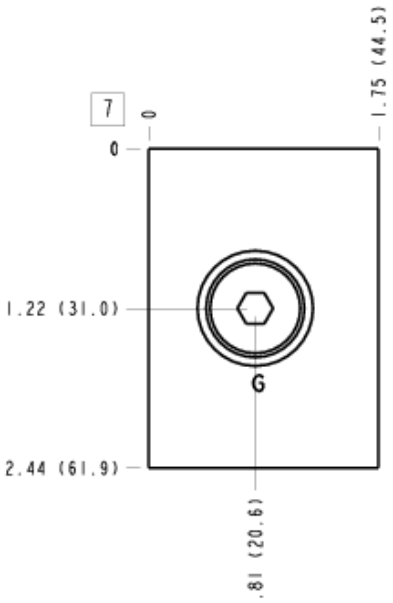

Face 10

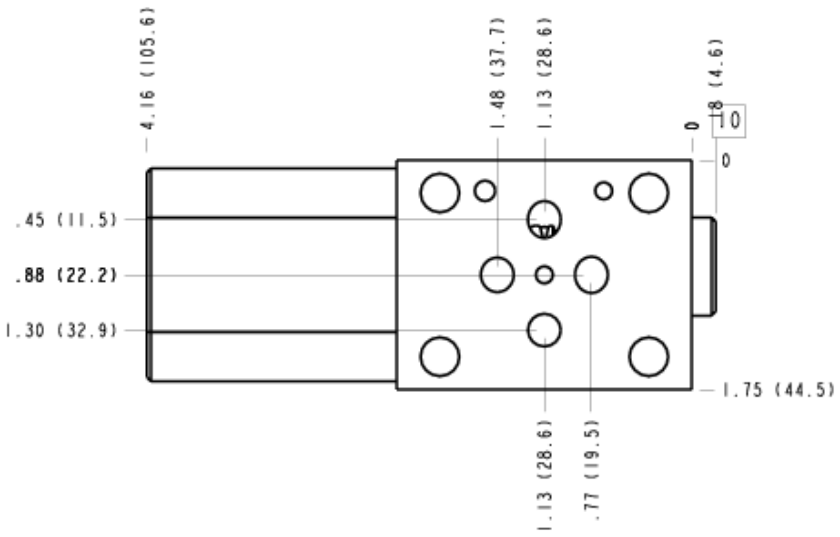

© 2025 Sun Hydraulics