

Ninety degree with high capacity port 3
CAVITY: T-11A

sunhydraulics.com/model/EAV



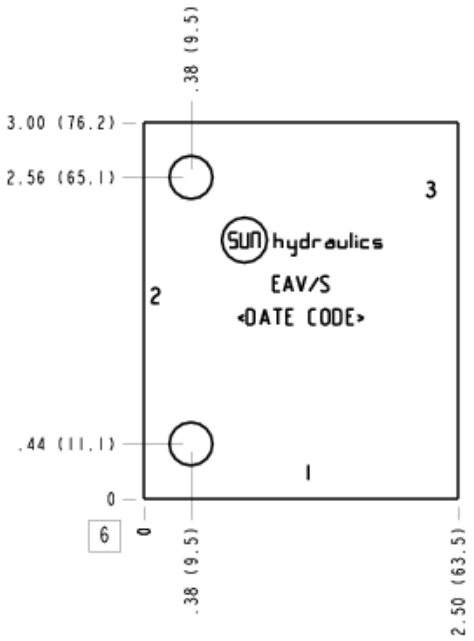

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Ninety degree with high capacity port 3
Mounting Hole Diameter	8.6 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-11A
Port Size	1/2" BSPP
Model Weight	0.83 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
EAV, /10, /11	Ports 1 & 2: 1/2" BSPP; Port 3: 3/8" BSPP;

CONFIGURATION OPTIONS
Model Code Example: EAV/S

MODIFIER (/S)

- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil 6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

FACE GRID


© 2024 Sun Hydraulics

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

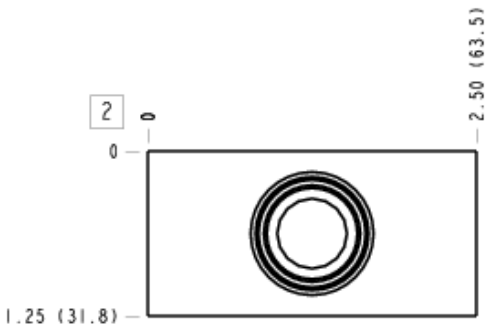


Face 5

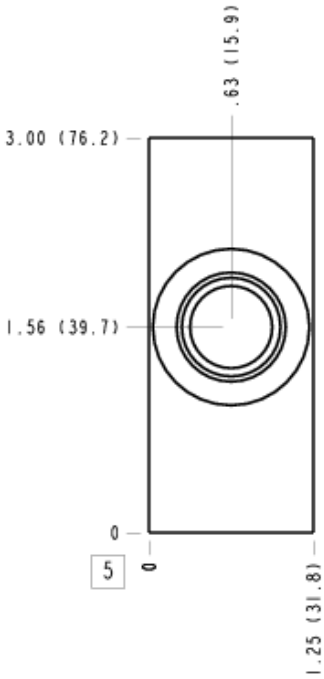


© 2024 Sun Hydraulics

Face 6

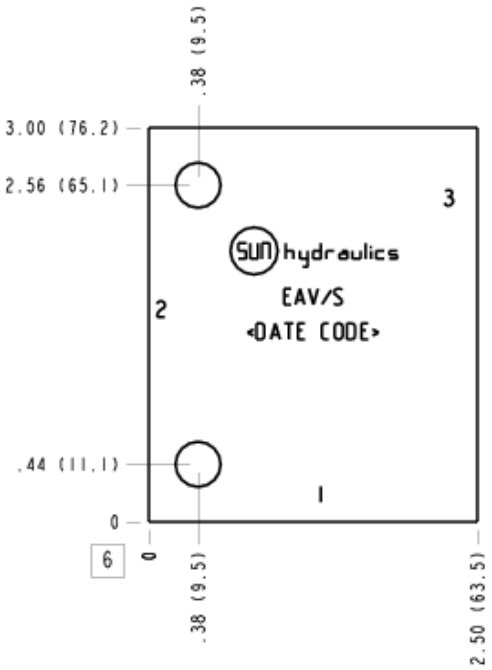


Face 7

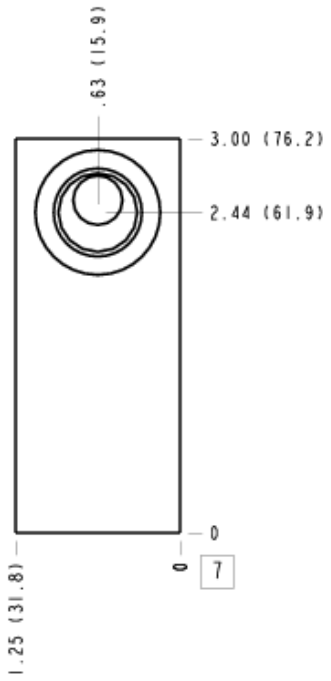


© 2024 Sun Hydraulics

Face 8

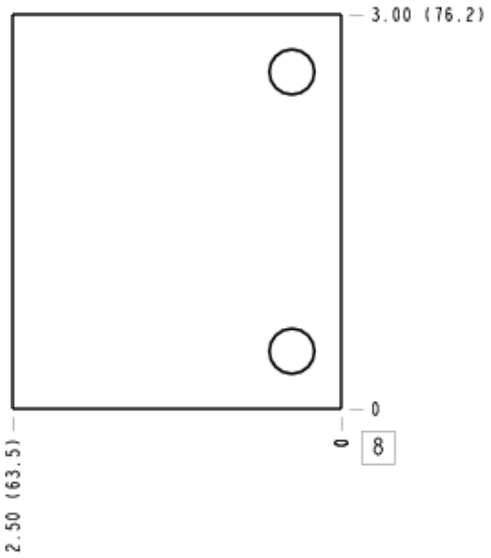

Face 10

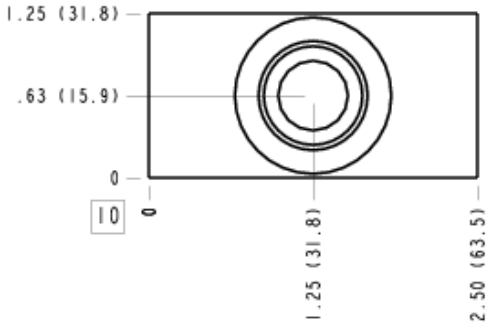

© 2024 Sun Hydraulics