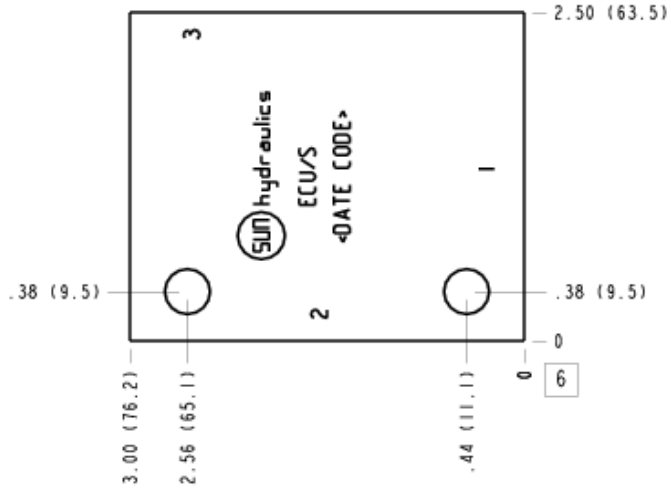



## CONFIGURATION

| | | |
|---|---|---|
| **/S** | Modifier | 65-45-12 Ductile Iron, Buna-N, Dewatering Oil |

## TECHNICAL DATA

| | |
|---|---|
| Body Type | Line mount |
| Interface | None |
| Body Features | Ninety degree |
| Mounting Hole Diameter | 8.6 mm |
| Mounting Hole Depth | Through |
| Mounting Hole Quantity | 2 |
| Open Cavities | 1 |
| Cavity | T-11A |
| Port Size | 3/8" BSPP |
| Model Weight | 0.87 kg. |

## NOTES

***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## PORT DESIGNATORS

| Modifiers | Ports |
|---|---|
| ECU, /10, /11, /S, /S3 | Ports 1 & 2: 3/8" BSPP; Port 3: 1/4" BSPP; |

## CONFIGURATION OPTIONS
## Model Code Example: ECU/S

**MODIFIER (/S)**

- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
  6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


## MANIFOLD FACES

### FACE GRID


| | | | |
|---|---|---|---|
| 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 |

© 2024 Sun Hydraulics


## Face 2

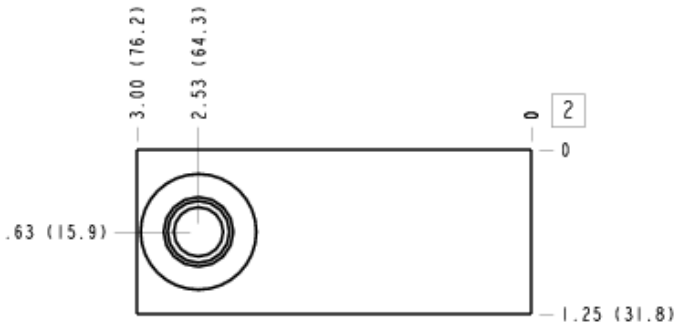


## Face 5

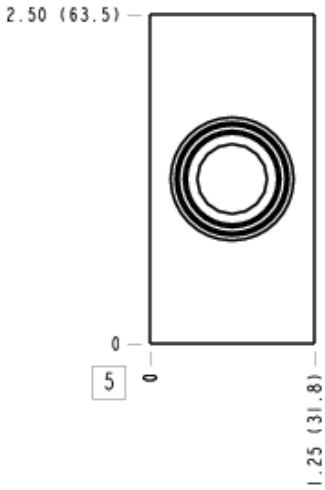



## Face 6

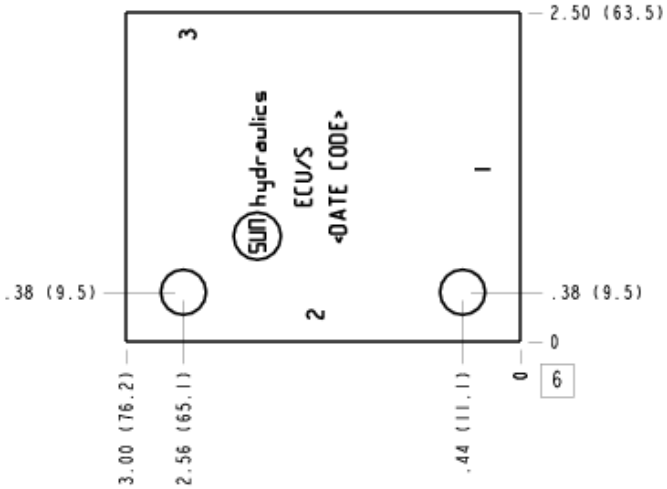



© 2024 Sun Hydraulics

## Face 7

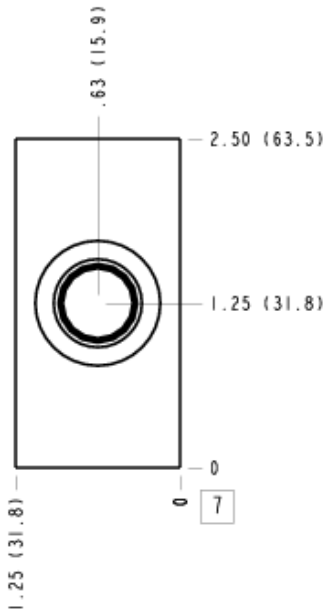


## Face 10

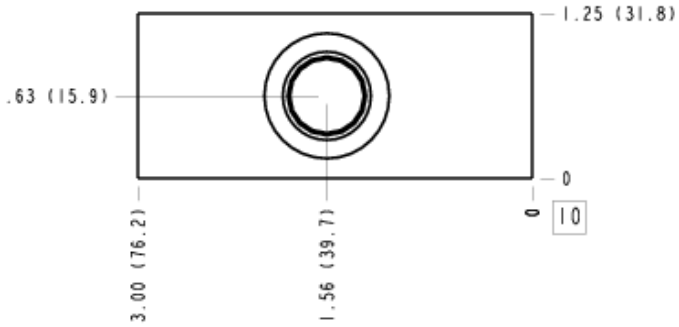


© 2024 Sun Hydraulics