
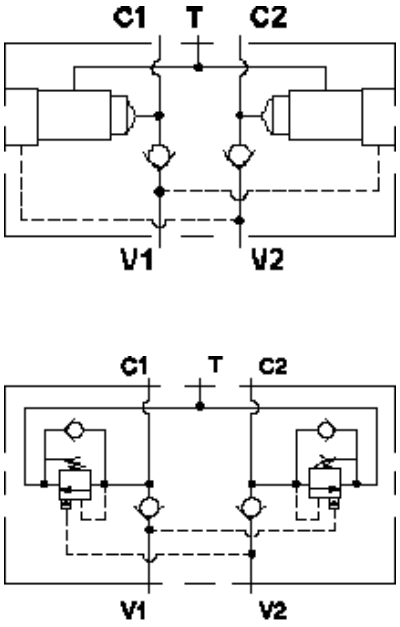


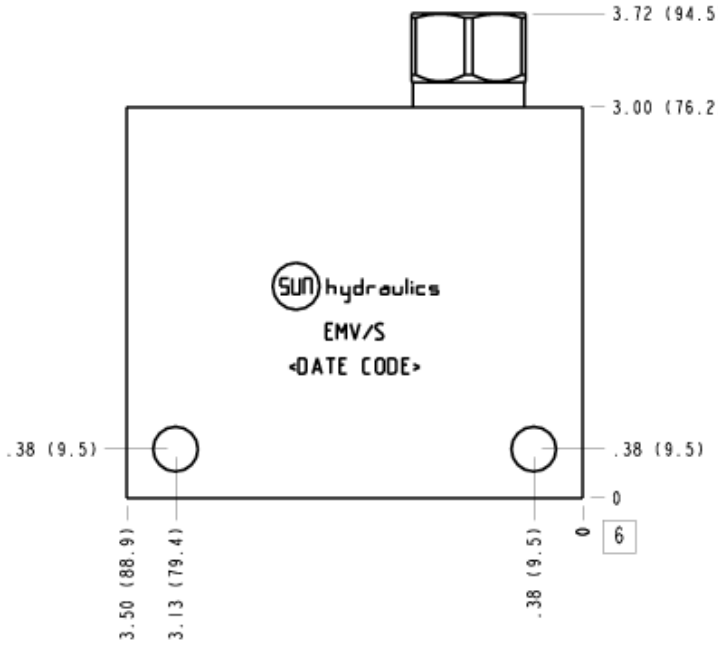

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Cushion lock
Mounting Hole Diameter	8.6 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	2
Cavity	T-11A
Port Size	1/2" BSPP
Model Weight	3.02 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
EMV, /10, /11, /15, /16, /V	Ports C1, C2, V1, V2: 1/2" BSPP; Port T: 1/2" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
CXCDXCN	Cartridge	2

CONFIGURATION OPTIONS
Model Code Example: EMVArray

MODIFIER **(/S)**

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/V 6061-T651 Aluminum, Viton

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black


/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES

FACE GRID




Face 2

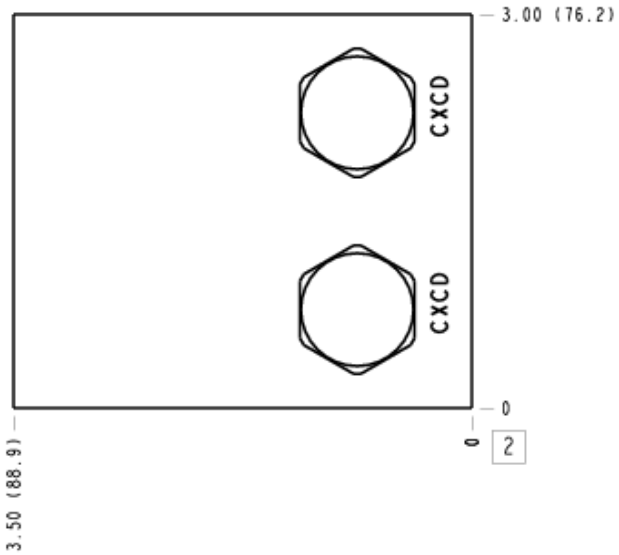


© 2026 Sun Hydraulics

Face 5

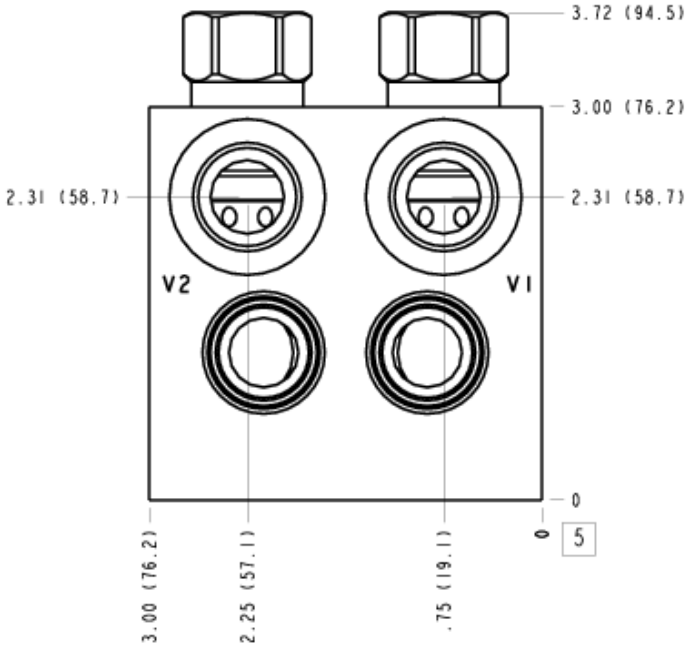


Face 6

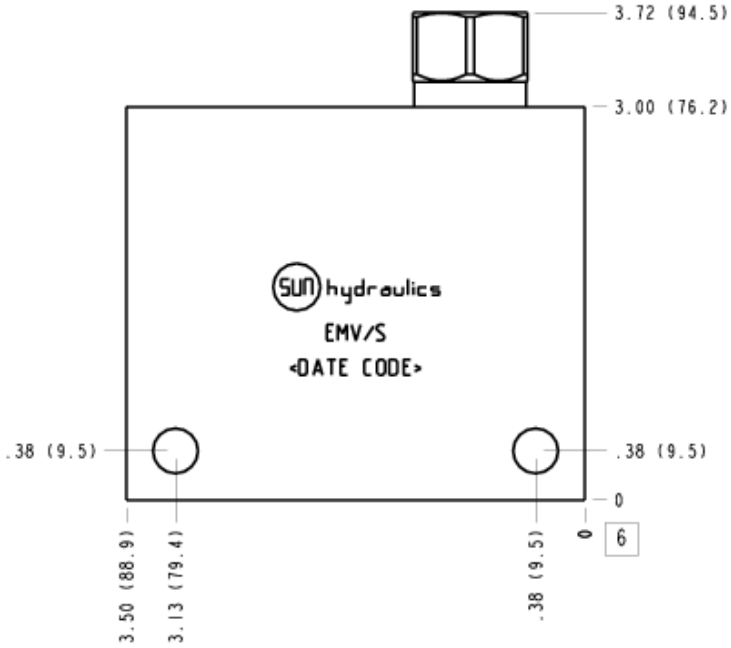


© 2026 Sun Hydraulics

Face 7

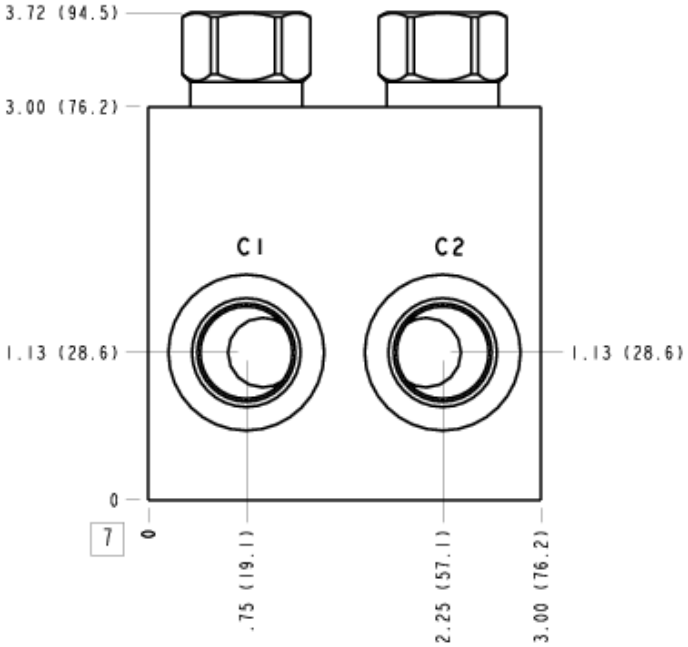


Face 8

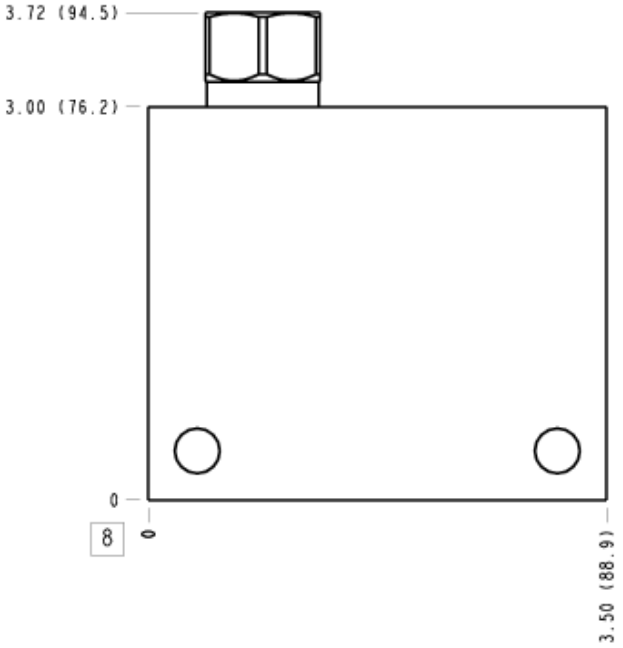

© 2026 Sun Hydraulics

Face 10

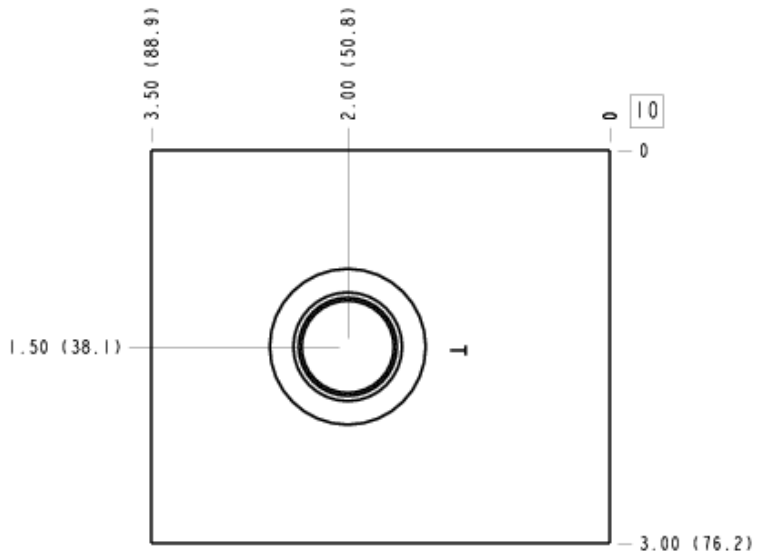

© 2026 Sun Hydraulics