





Flow Control, Meter-In, P, High Capacity



Flow Control, Meter-Out T, High Capacity



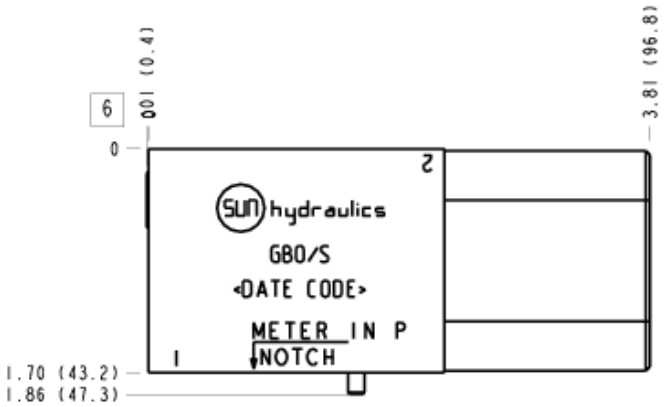

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	Into P or out of T
Stack Height	44,5 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-5A
Model Weight	1.00 kg.

CONFIGURATION

/S Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1
A330-006-002	Sub-assembly	1

CONFIGURATION OPTIONS
Model Code Example: GBOArray

MODIFIER **(/S)**

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/V 6061-T651 Aluminum, Viton

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black


/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES

FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

Face 2

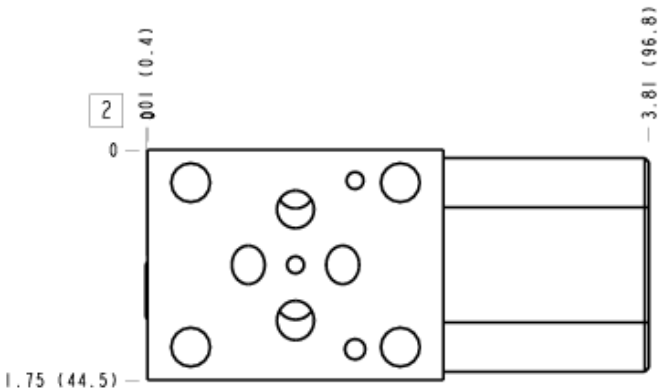


© 2026 Sun Hydraulics


Face 5

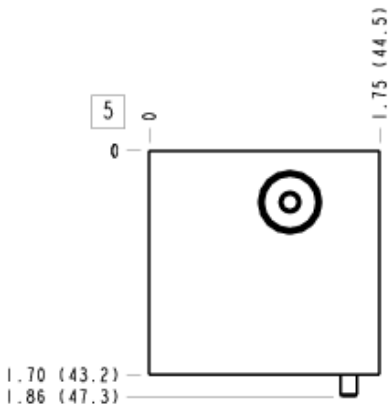

Face 6

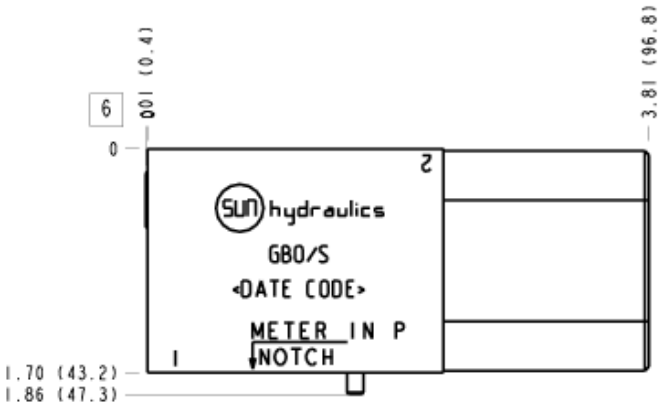


Face 7

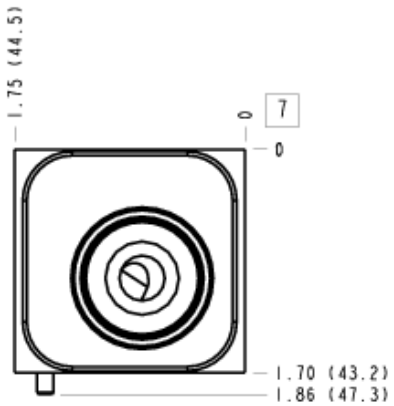


© 2026 Sun Hydraulics

Face 8

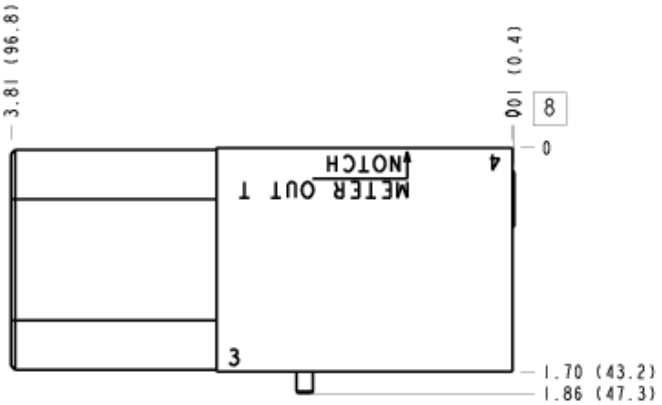

Face 10

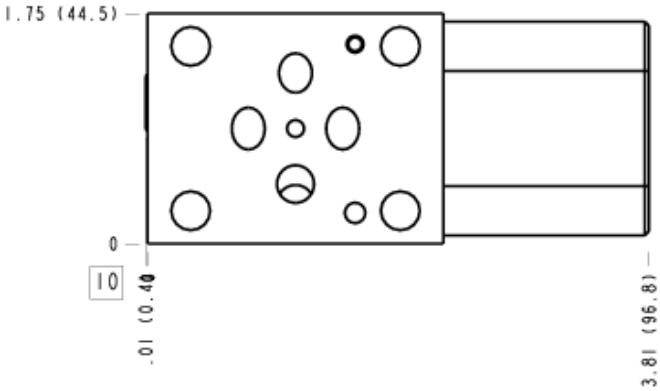

© 2026 Sun Hydraulics