


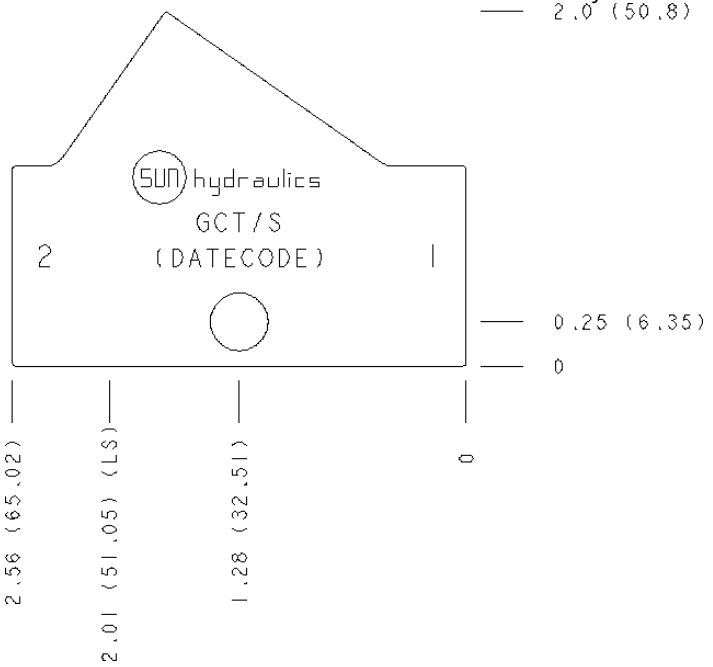

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Inline
Mounting Hole Diameter	8,4 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	1
Open Cavities	1
Cavity	T-13A
Port Size	1/4" BSPP
Model Weight	0.39 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
GCT, /10, /11	All Ports: 1/4" BSPP;

CONFIGURATION OPTIONS
Model Code Example: GCTArray

MODIFIER **(/S)**


/S	65-45-12 Ductile Iron, Buna-N, Dewatering Oil
	6061-T651 Aluminum, Buna-N
/10	6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/11	6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/S3	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/S4	65-45-12 Ductile Iron, Buna-N, Chem. Black
/S5	65-45-12 Ductile Iron, Buna-N, Electroless Nickel

MANIFOLD FACES

FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

Face 2

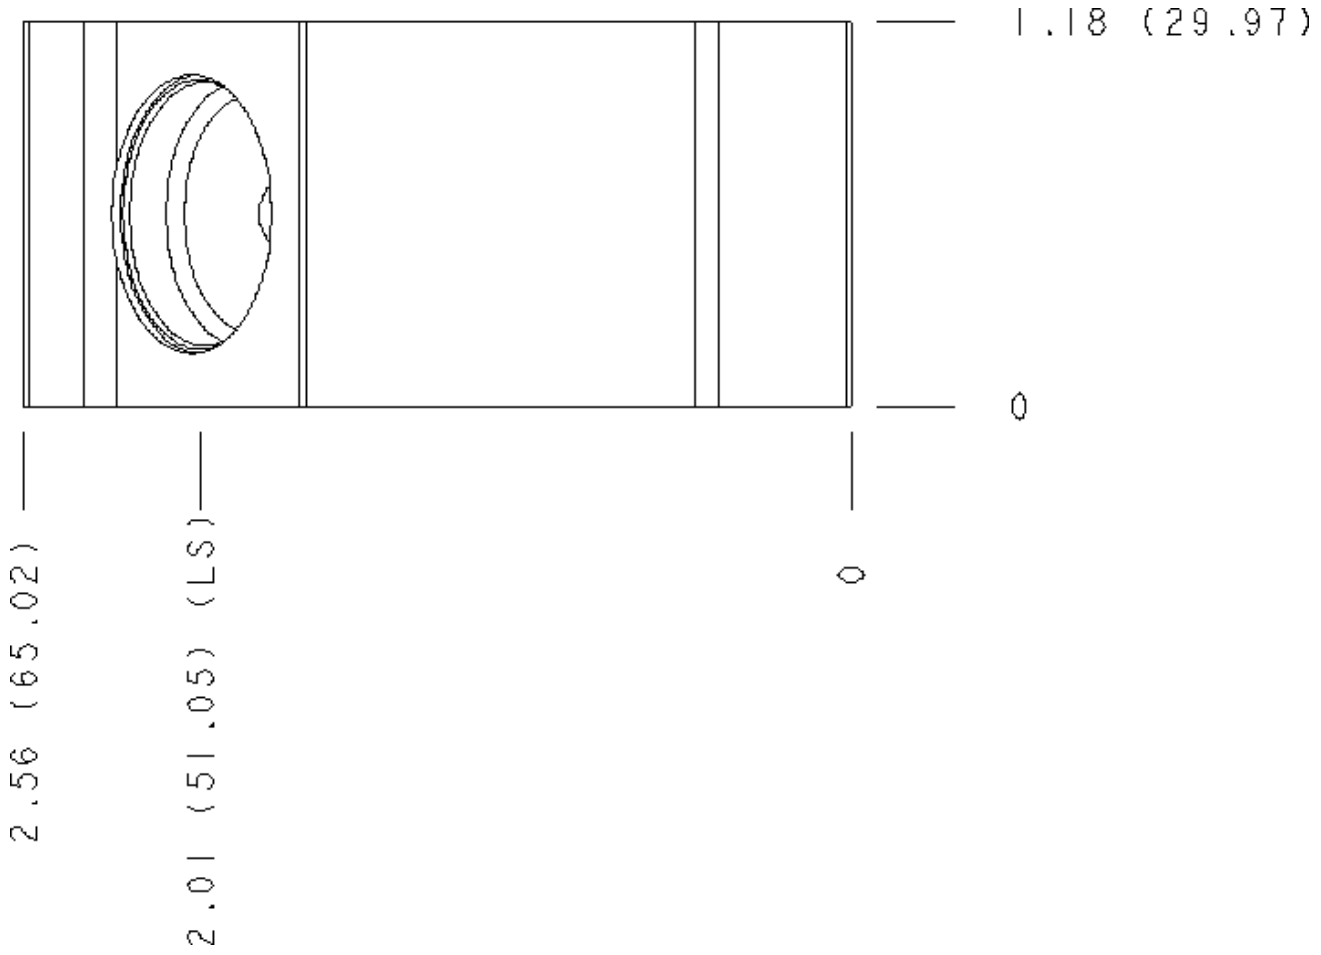


© 2026 Sun Hydraulics

Face 5

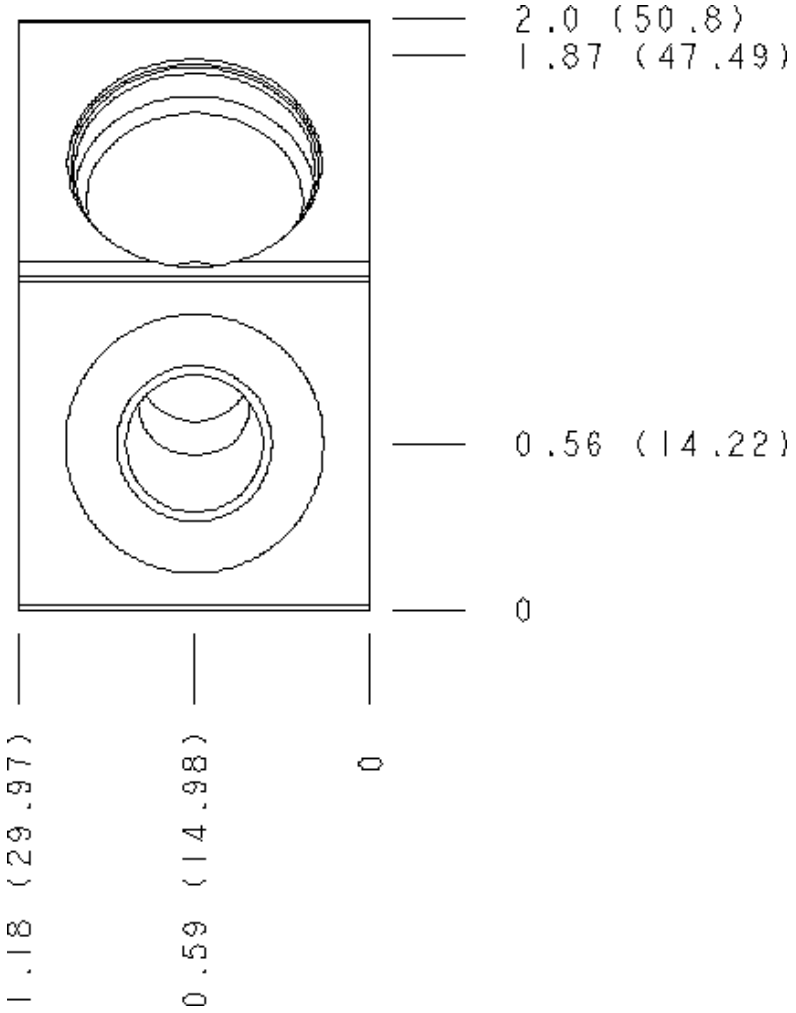


© 2026 Sun Hydraulics

Face 6

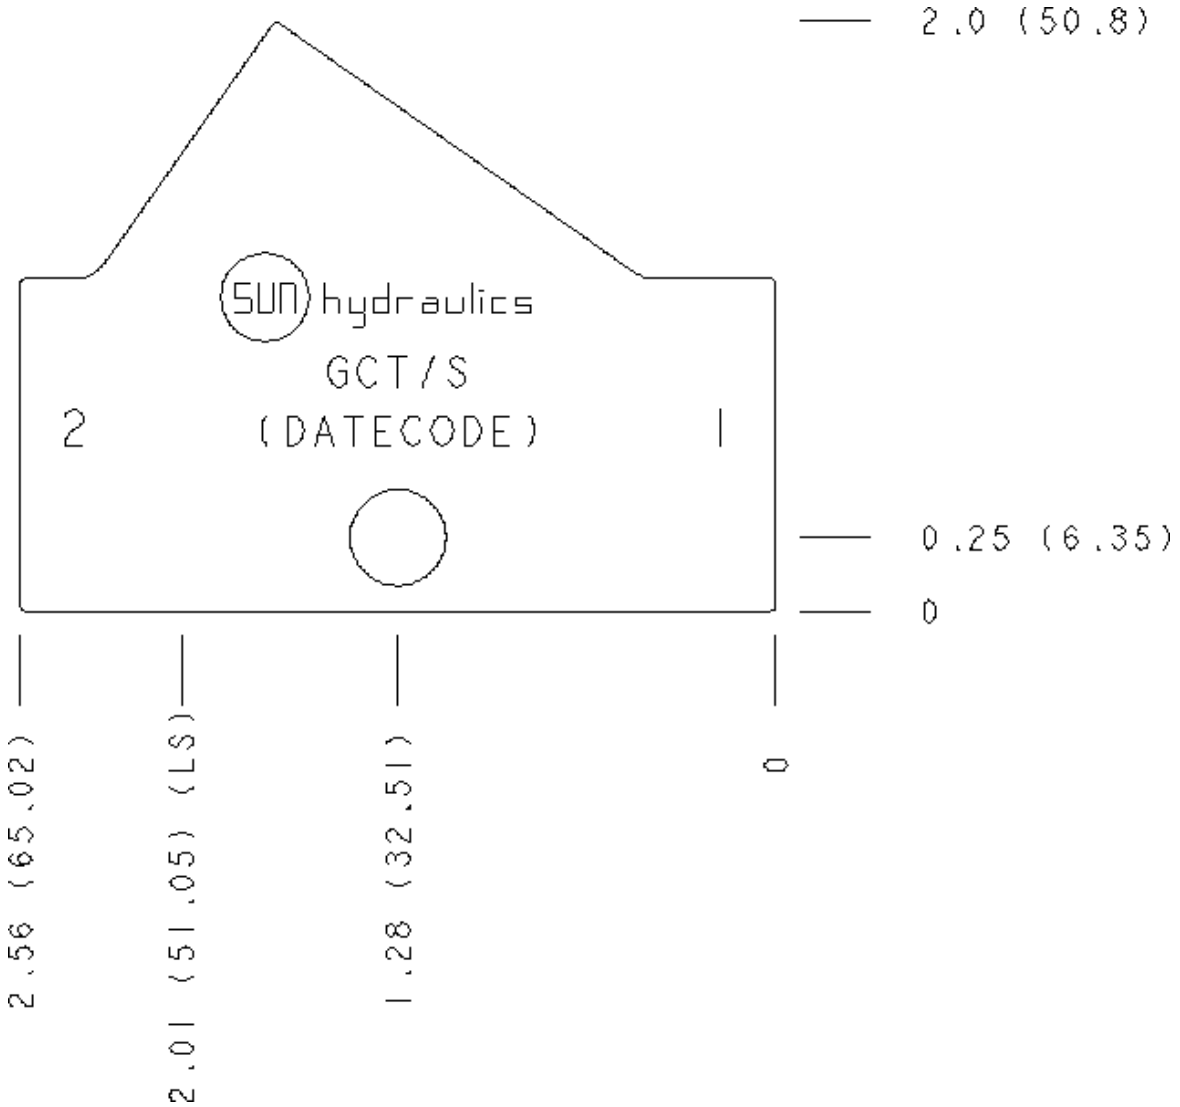

© 2026 Sun Hydraulics

Face 7

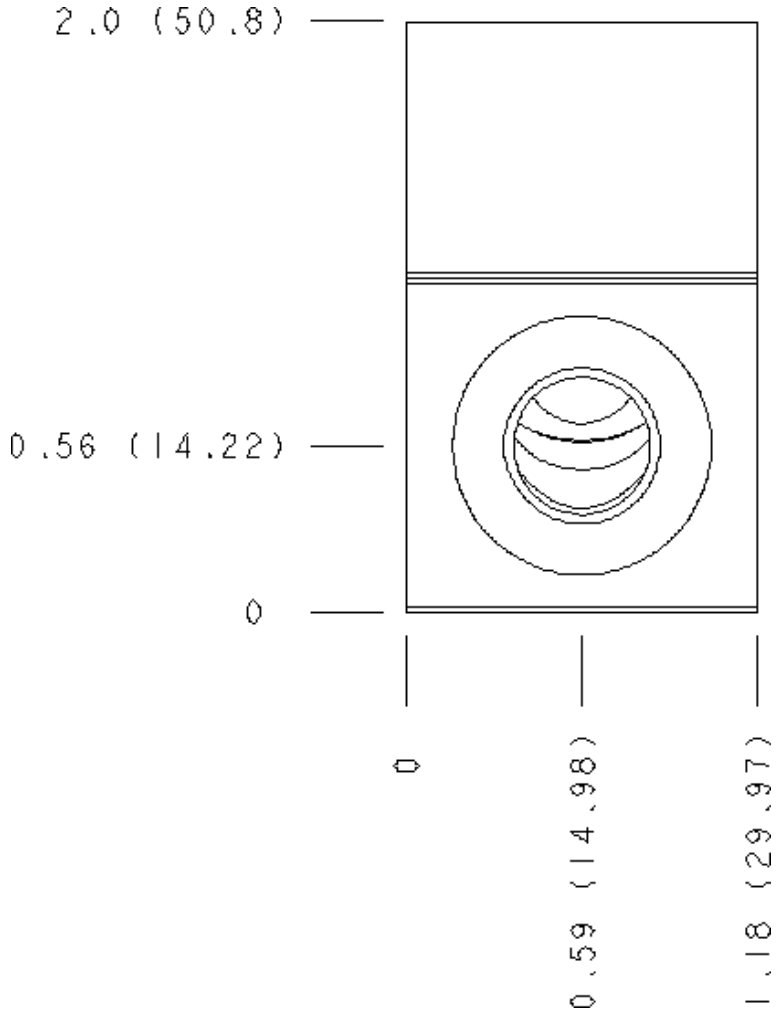

© 2026 Sun Hydraulics