





Flow Control, Meter-In, P



Flow Control, Meter-Out, T



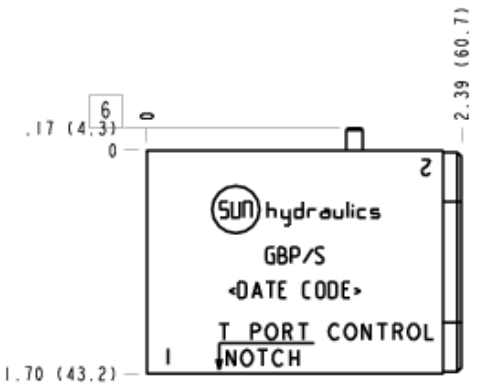

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	Into P or out of T
Stack Height	44,5 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-13A
Model Weight	0.66 kg.

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

NOTES

- Stack height value in technical data table includes seal retainer plate.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS
Model Code Example: GBP/S

MODIFIER **(/S)**

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
6061-T651 Aluminum, Buna-N
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/V 6061-T651 Aluminum, Viton
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil
/Y4 65-45-12 Ductile Iron, Viton, Chem. Black
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

FACE GRID


© 2025 Sun Hydraulics

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

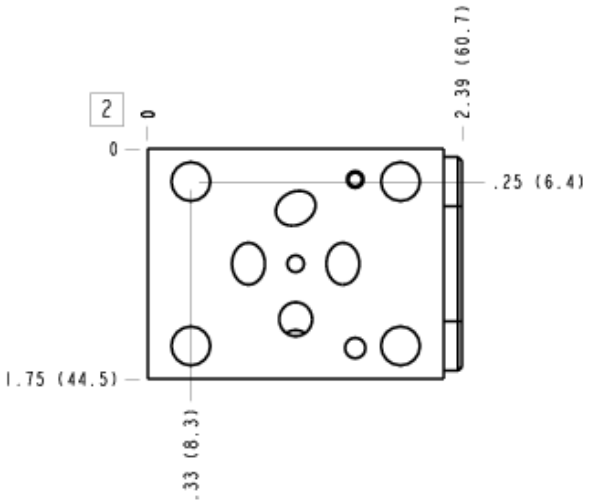

Face 6

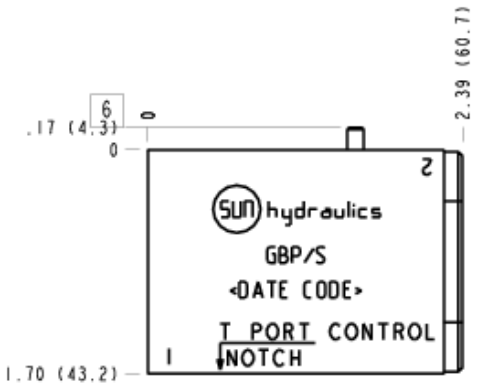


Face 7

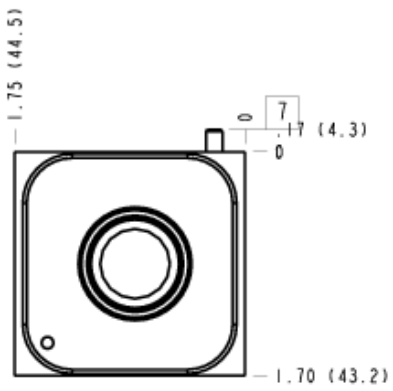


© 2025 Sun Hydraulics

Face 8

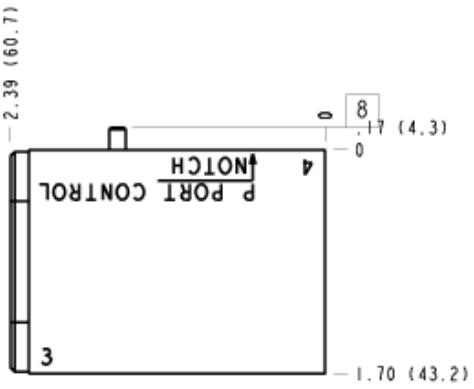

Face 10

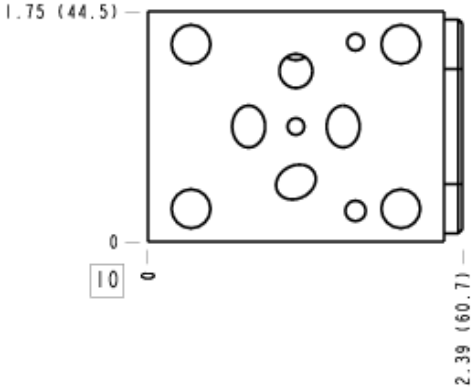

© 2025 Sun Hydraulics