

MODEL
HDX

Inline
CAVITY: T-17A

sunhydraulics.com/model/HDX

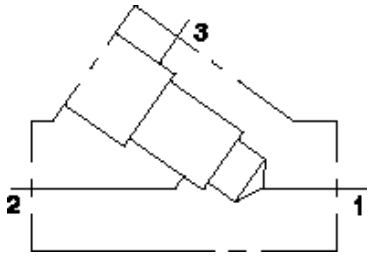

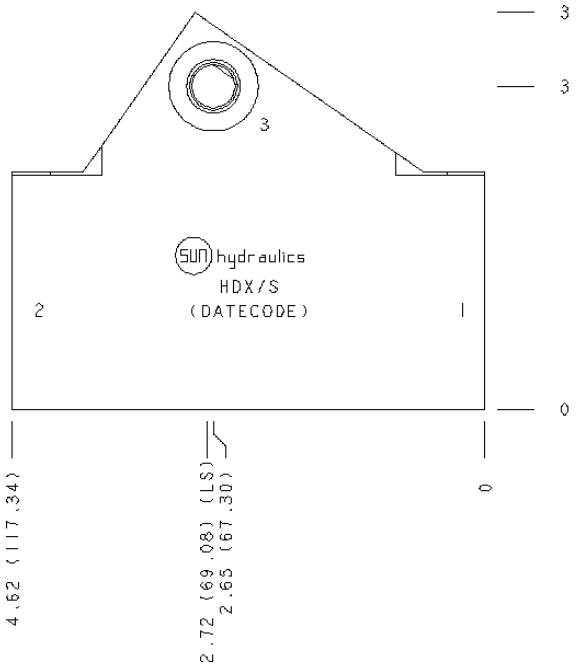

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Inline
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-17A
Port Size	1" BSPP
Model Weight	3.64 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
HDX, /10, /11	Ports 1 & 2: 1" BSPP; Port 3: 1/4" BSPP;

CONFIGURATION OPTIONS
Model Code Example: HDX/S

MODIFIER **(/S)**

- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil 6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

FACE GRID

© 2025 Sun Hydraulics




Face 2

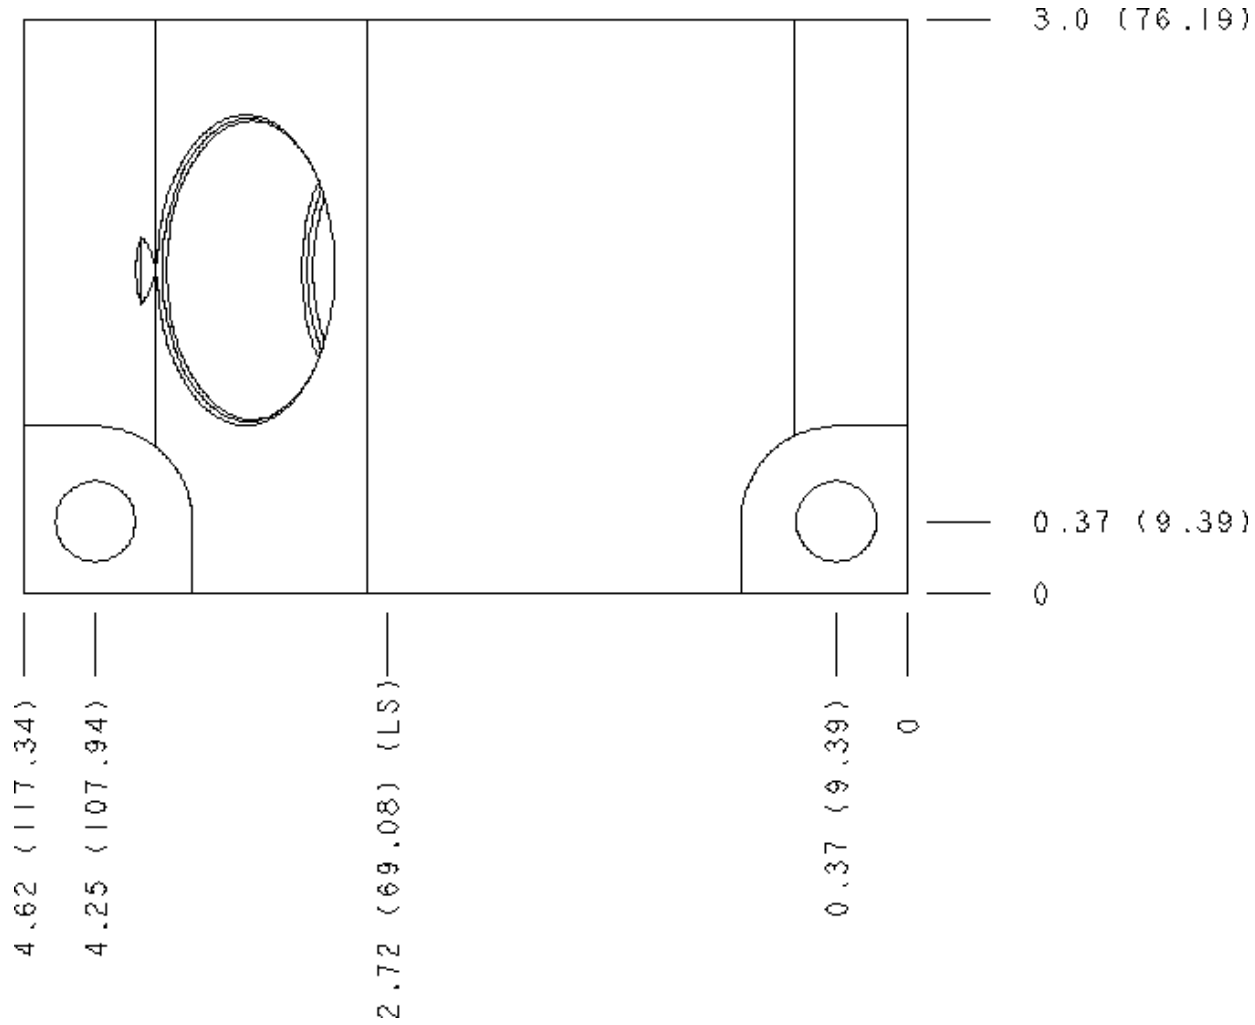


© 2025 Sun Hydraulics

Face 5

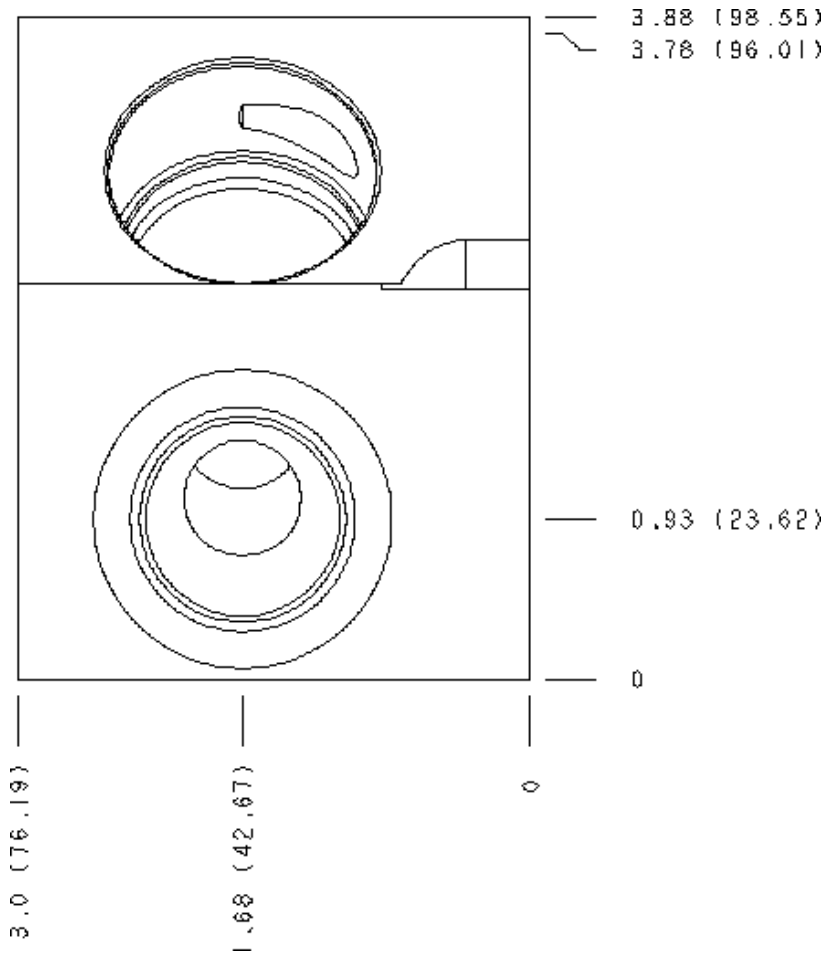


© 2025 Sun Hydraulics

Face 6

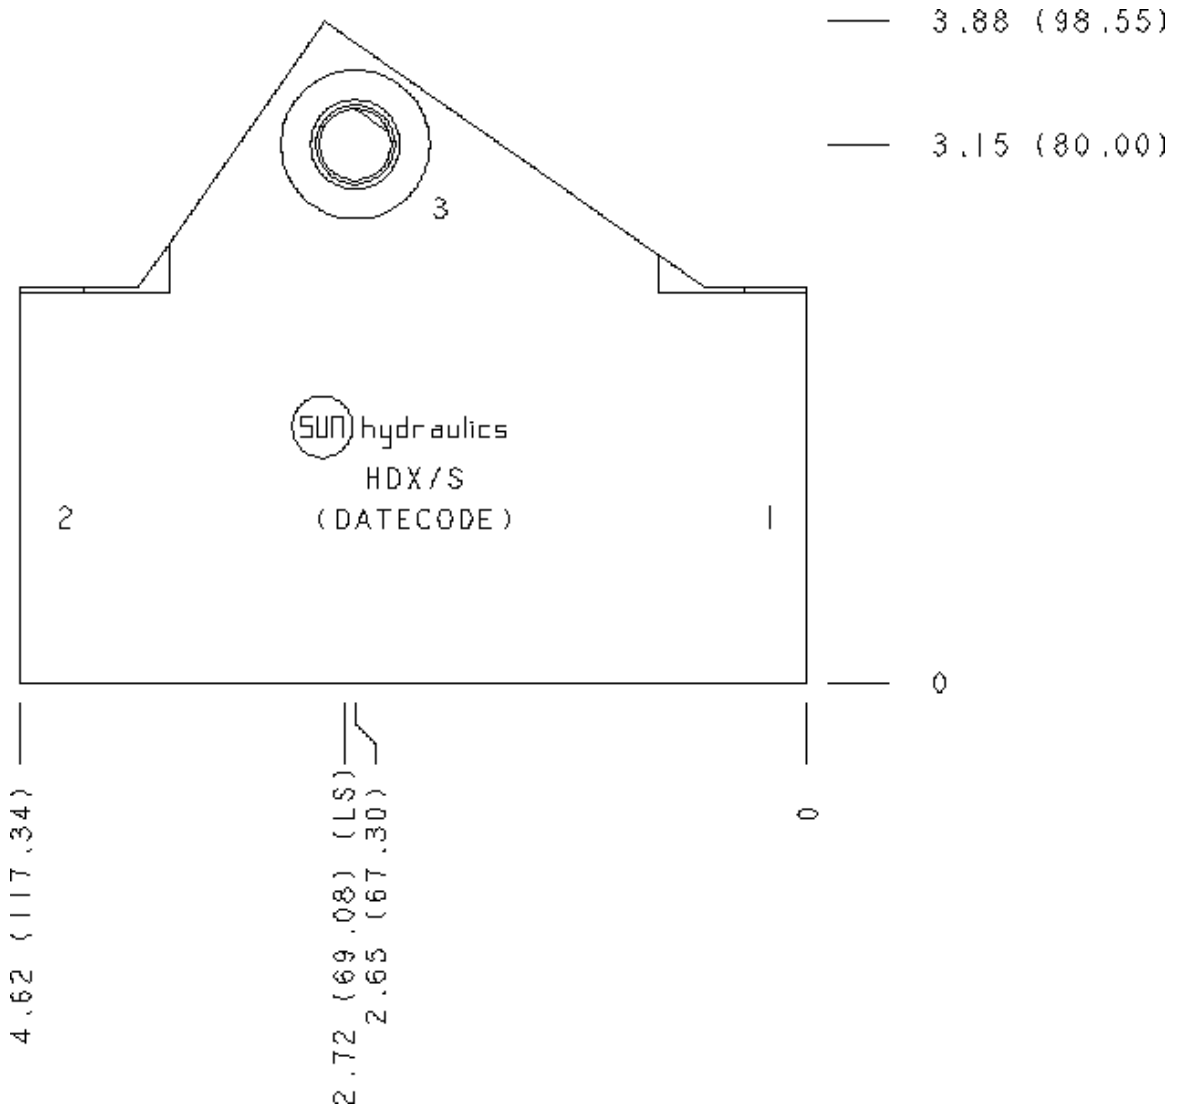

© 2025 Sun Hydraulics

Face 7

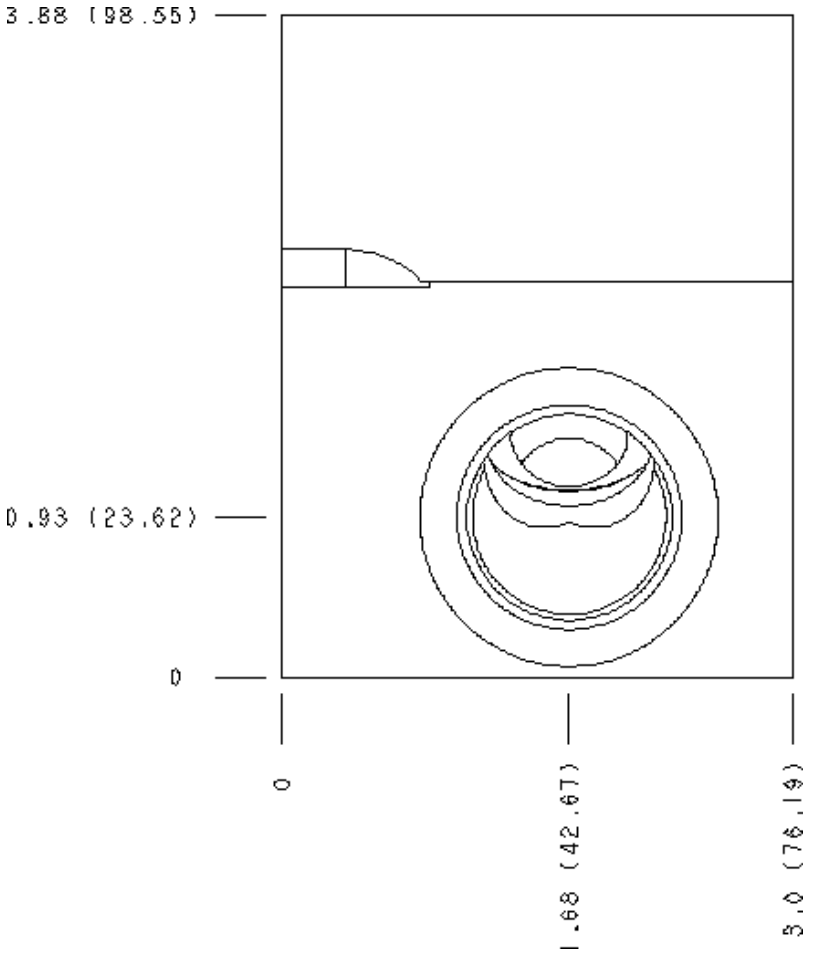

© 2025 Sun Hydraulics