


ISO 07: Reducer/reliever on B with reverse flow check and port 4 external
CAVITY: T-23A

sunhydraulics.com/model/PK3






Reducing/Relieving, On B, port 3 to T with reverse flow check, port 4 externally drained



Reducing/Relieving, On B tank to T, external vent, reverse flow check



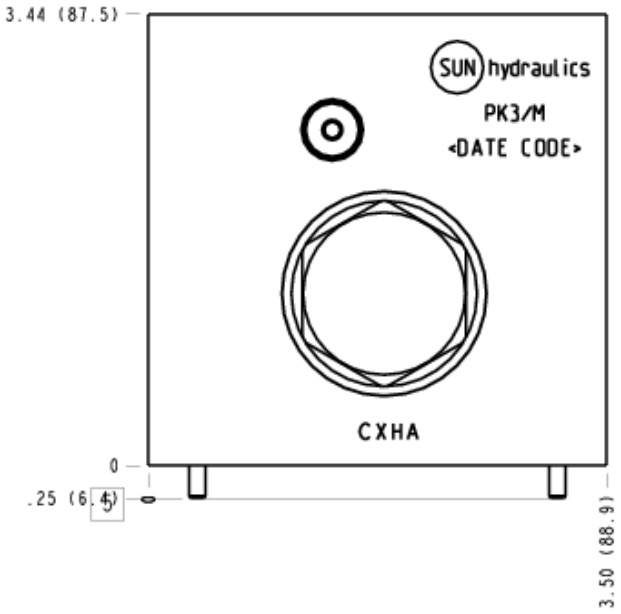

CONFIGURATION

/M Modifier 6061-T651 Aluminum, Metric, Buna-N

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 07
Body Features	Reducer/reliever on B with reverse flow check and port 4 external
Stack Height	90 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-23A
Port Size	SAE 6
Model Weight	3.26 kg.

NOTES

- Stack height value in technical data table includes seal retainer plate.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
PK3, /10, /11, /15, /16, /V	Port 4: SAE 6;
PK3/1A, /1B, /1F, /1G, /M, /Z	Port 4: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-111	O-Ring	2
500-001-118	O-Ring	4
700-006	Seal Plate	1
811-001-006	Pin	2
A330-006-002	SAE Plug	2
CXHAXCN	Cartridge	1

CONFIGURATION OPTIONS
Model Code Example: PK3/M

MODIFIER (/M)

- **/M** 6061-T651 Aluminum, Metric, Buna-N
- 6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/V** 6061-T651 Aluminum, Viton
- **/16** 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/15** 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/1B** 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/1A** 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/Z** 6061-T651 Aluminum, Metric, Viton
- **/1G** 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/1F** 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/Y** 65-45-12 Ductile Iron, Viton, Dewatering Oil
- **/Y4** 65-45-12 Ductile Iron, Viton, Chem. Black
- **/Y3** 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
- **/T** 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
- **/T4** 65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
- **/T3** 65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/W** 65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil
- **/W4** 65-45-12 Ductile Iron, Metric, Viton, Chem. Black
- **/W3** 65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

FACE GRID




© 2026 Sun Hydraulics

Face 2

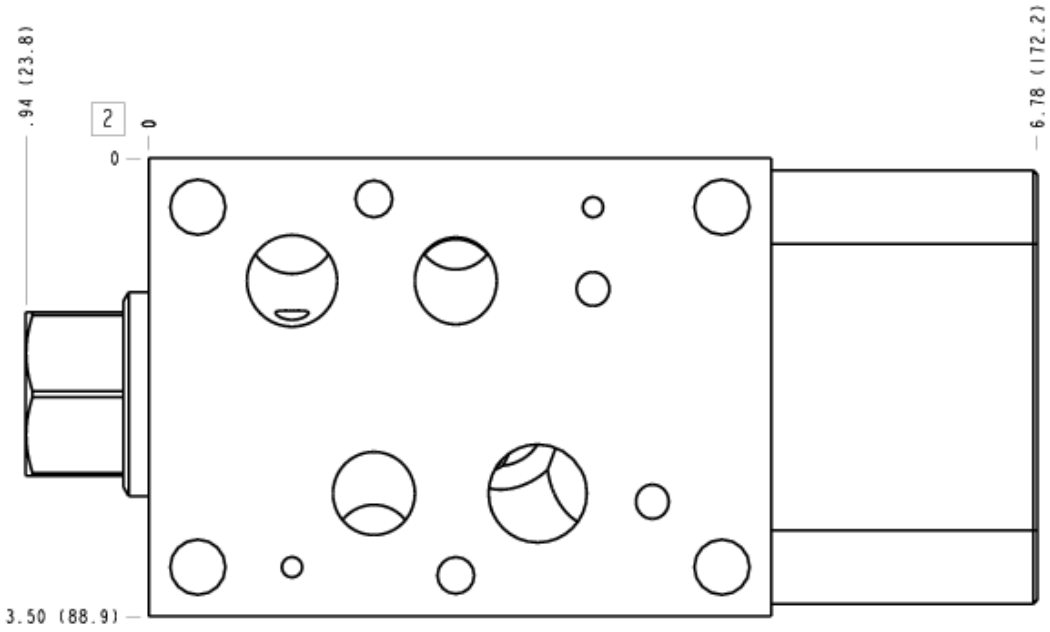


Face 5

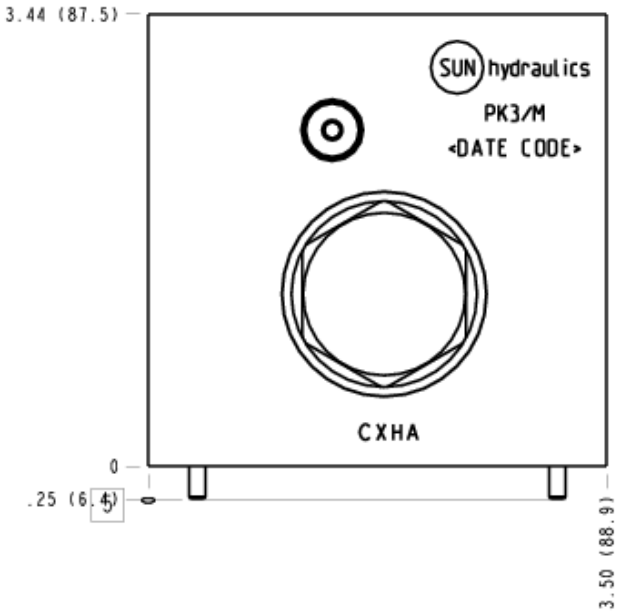


© 2026 Sun Hydraulics

Face 6

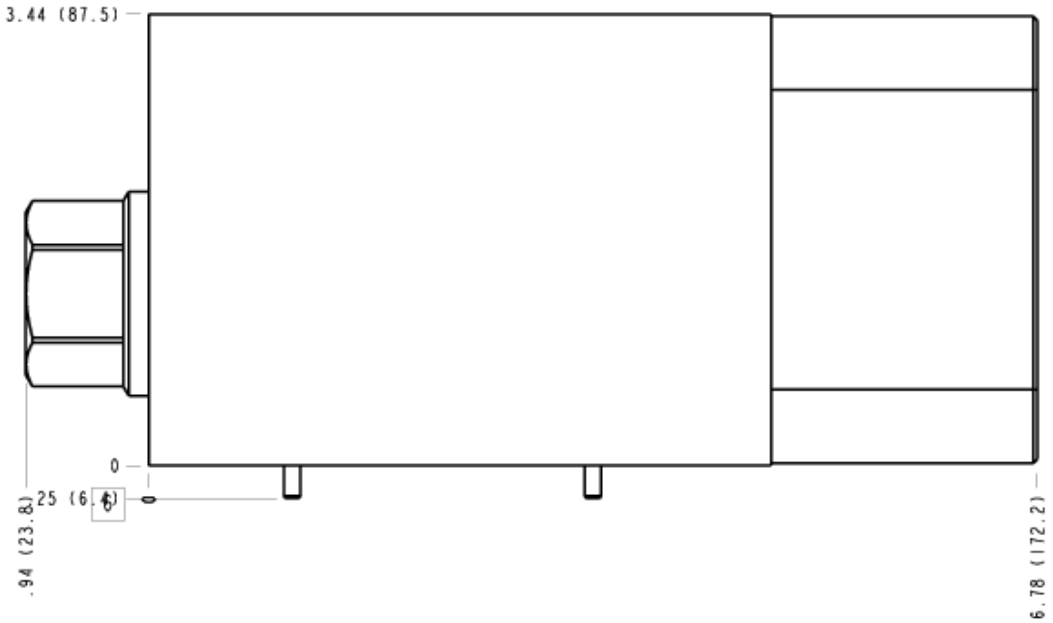


Face 7

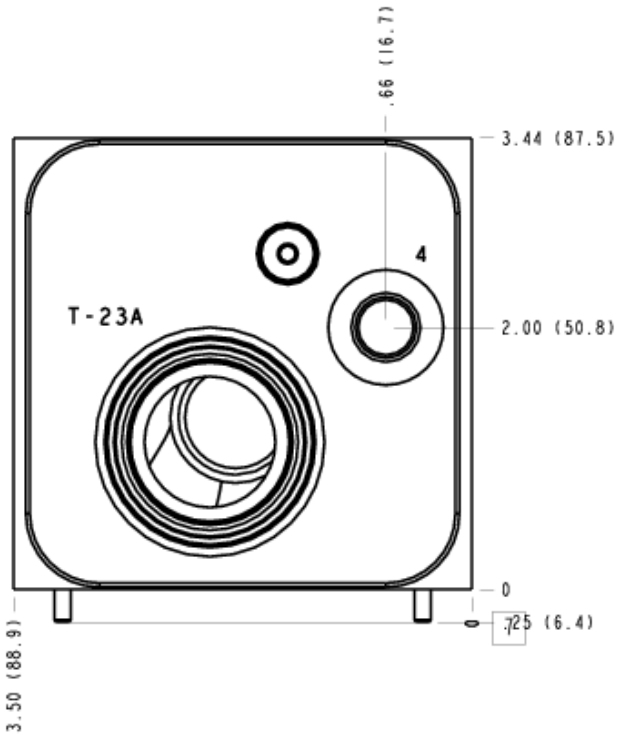

© 2026 Sun Hydraulics

Face 10

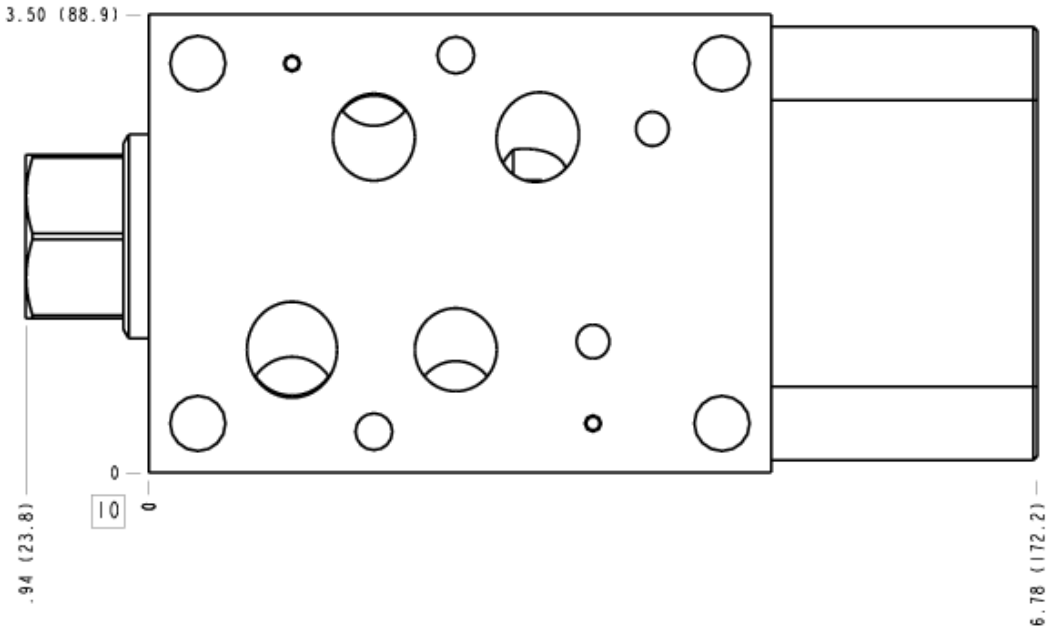

© 2026 Sun Hydraulics