
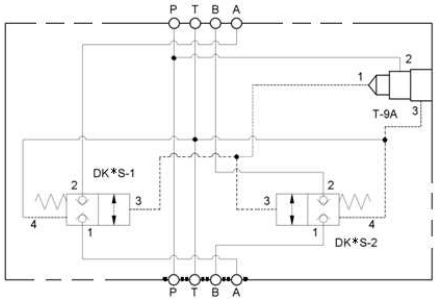


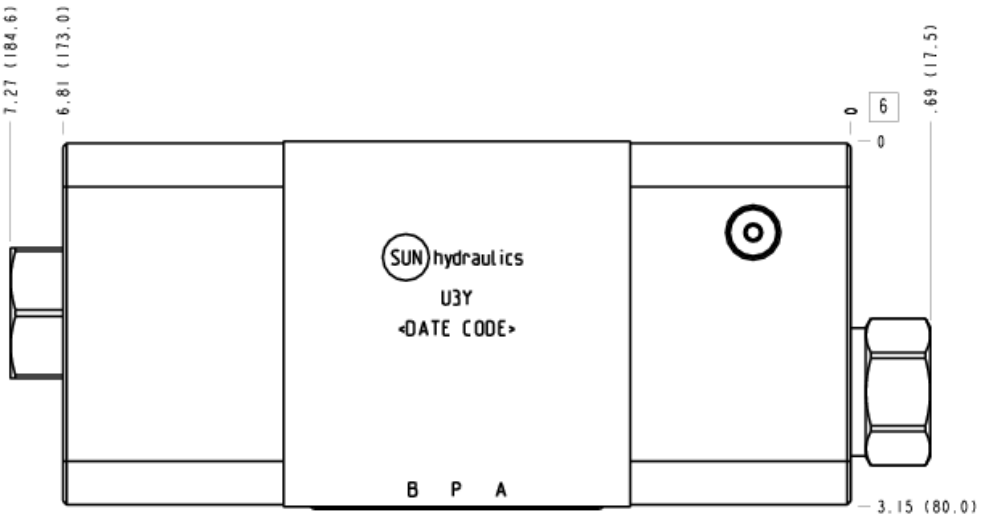

CONFIGURATION

(none) Modifier 6061-T651 Aluminum, Buna-N

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05
Body Features	Blocking valves on A and B
Seal Plate Included (see notes)	No
Includes integral cartridge(s)	Yes (see Included Components)
Open Cavities	1
Cavity	T-9A
Model Weight	2.46 kg.

NOTES

- Seal retainer plate is not required for this model.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-014	O-Ring	5
A330-006-002	SAE Plug	5
DKFSXHN	Cartridge	2

CONFIGURATION OPTIONS
Model Code Example: U3Y

MODIFIER

6061-T651 Aluminum, Buna-N
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/V 6061-T651 Aluminum, Viton
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil
/Y4 65-45-12 Ductile Iron, Viton, Chem. Black
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer


MANIFOLD FACES

© 2025 Sun Hydraulics


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

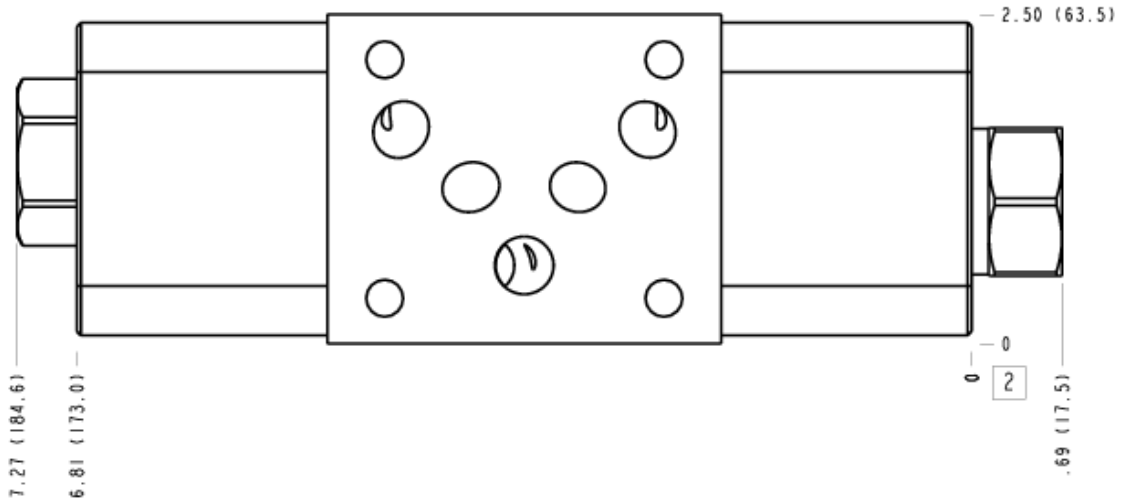


Face 5

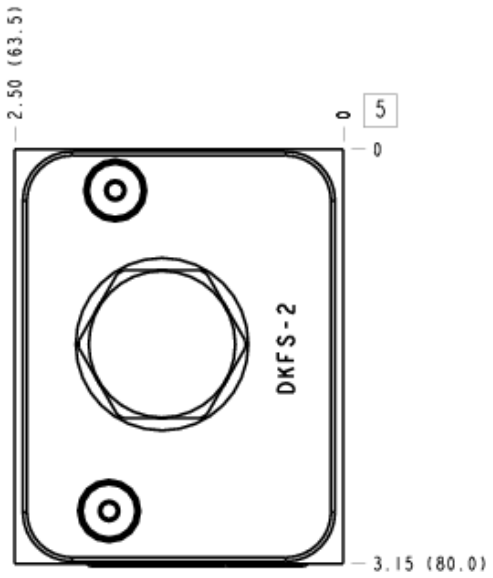


© 2025 Sun Hydraulics

Face 6

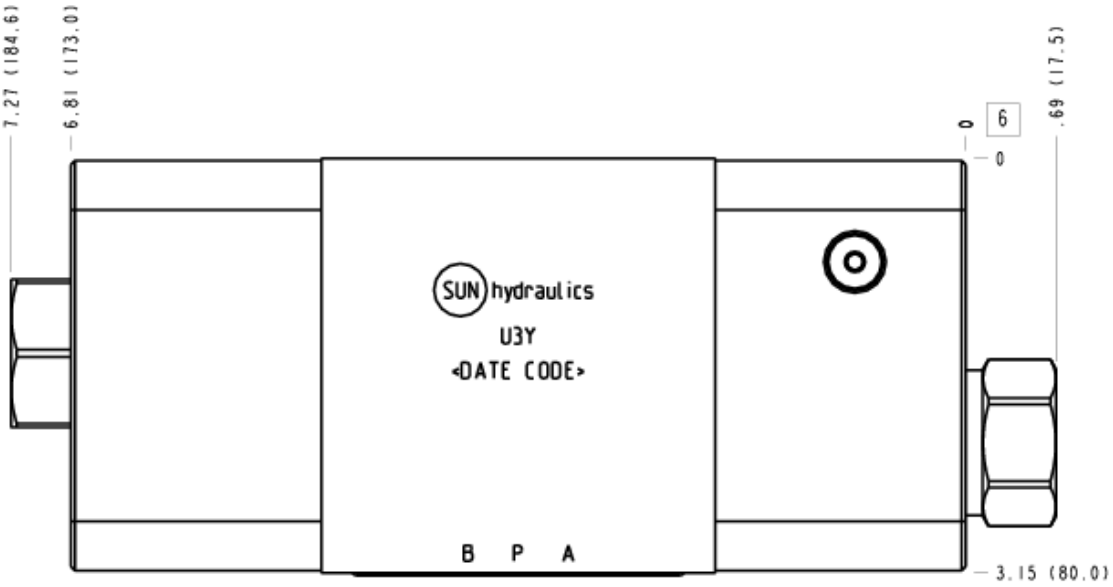


Face 7

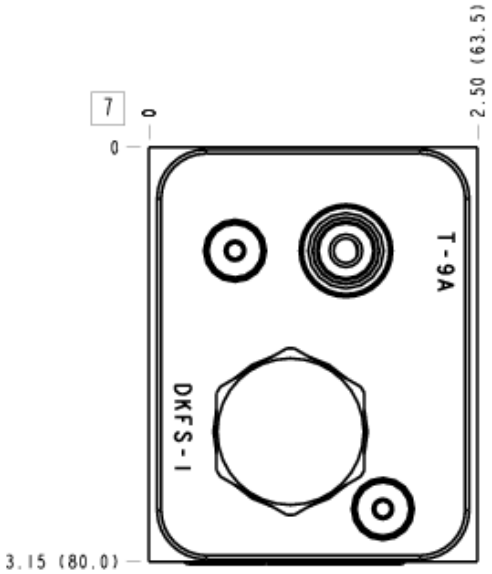

© 2025 Sun Hydraulics

Face 10

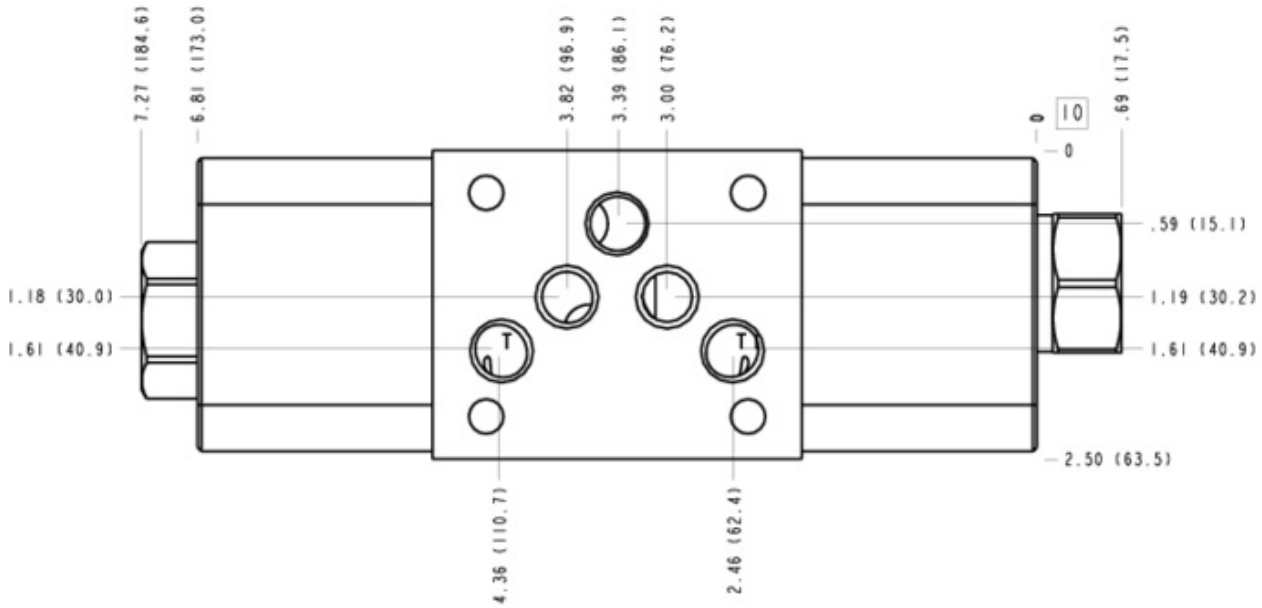

© 2025 Sun Hydraulics