

MODEL
SXCB

Atmospherically referenced, direct-acting sequence valve without reverse flow check

SERIES 1 / CAPACITY: 60 L/min. / CAVITY: T-13A

sunhydraulics.com/model/SXCB



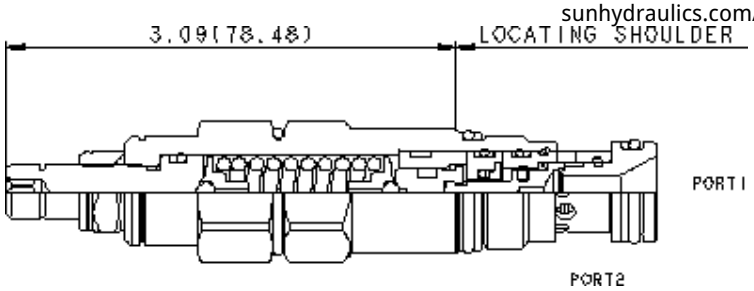

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) Standard Setting
N	Seal Material	Buna-N
(none)	Material/Coating	

Atmospherically referenced, direct-acting sequence valves will supply a secondary circuit with flow once the pressure at the inlet (port 1) has exceeded the valve setting. The pressure setting of this sequence valve controls the pressure at port 1 relative to the atmospheric vent.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-13A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,7 cc/min.
Response Time - Typical	2 ms
Adjustment - No. of CW Turns from Min. to Max. setting	4
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Seal kit - Cartridge	Buna: 990010007
Seal kit - Cartridge	EPDM: 990010014
Seal kit - Cartridge	Polyurethane: 990010002
Seal kit - Cartridge	Viton: 990010006
Model Weight	0.21 kg.

© 2025 Sun Hydraulics

CONFIGURATION OPTIONS


Model Code Example: SXCBLAN

CONTROL (L)	ADJUSTMENT RANGE (A)	SEAL MATERIAL (N)	MATERIAL/COATING
L Standard Screw Adjustment	**A** 500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) Standard Setting	**N** Buna-N	Standard Material/Coating
C Tamper Resistant - Factory Set	**B** 300 - 1500 psi (20 - 105 bar), 1000 psi (70 bar) Standard Setting	**E** EPDM	**/AP** Stainless Steel, Passivated
K Handknob	**C** 2000 - 6000 psi (140 - 420 bar), 2000 psi (140 bar) Standard Setting	**V** Viton	**/LH** Mild Steel, Zinc-Nickel
	D 200 - 800 psi (14 - 55 bar), 400 psi (28 bar) Standard Setting		
	E 100 - 400 psi (7 - 28 bar), 200 psi (14 bar) Standard Setting		
	W 800 - 4500 psi (55 - 315 bar), 1000 psi (70 bar) Standard Setting		

TECHNICAL FEATURES

- Suitable for use in load holding applications.
- Atmospherically referenced valves should only be used where it is impossible have a drain connection. Over time, the atmospherically referenced valves may leak externally or allow moisture into the spring chamber.
- Approximately 1 drop (0,07 cc) of fluid will pass into the vented spring chamber every 4000 cycles.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

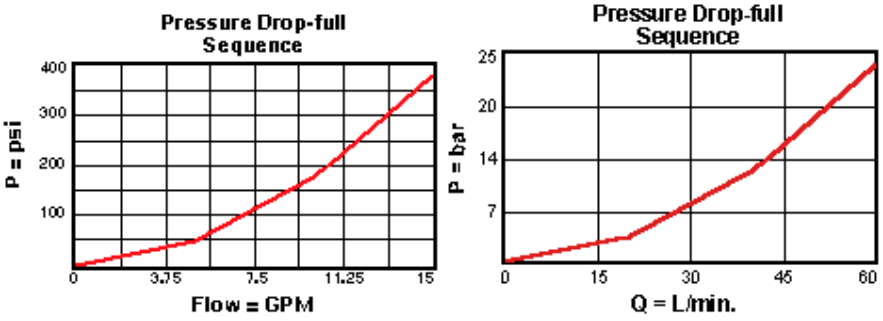

© 2025 Sun Hydraulics