

MODEL
U9D

4 way, combined ports 1 to P, ports 2 to A and B, combined ports 3 to tank
CAVITY: T-11A

sunhydraulics.com/model/U9D



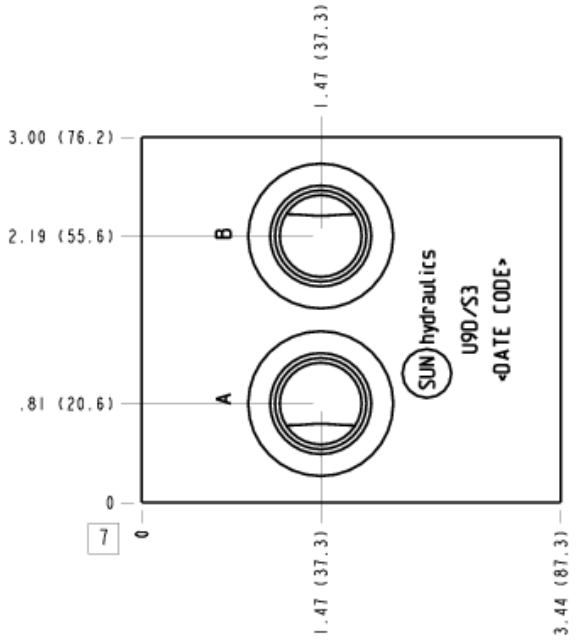

CONFIGURATION

/S3 Modifier	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

TECHNICAL DATA

Body Type	Line mount
Body Features	4 way, combined ports 1 to P, ports 2 to A and B, combined ports 3 to tank
Mounting Hole Diameter	8.6 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	2
Cavity	T-11A
Port Size	1/2" BSPP
Model Weight	4.01 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
U9D, /10, /11, /S3	All Ports: 1/2" BSPP;

CONFIGURATION OPTIONS
Model Code Example: U9DArray

MODIFIER **(/S3)**

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
6061-T651 Aluminum, Buna-N
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I


MANIFOLD FACES

© 2026 Sun Hydraulics


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

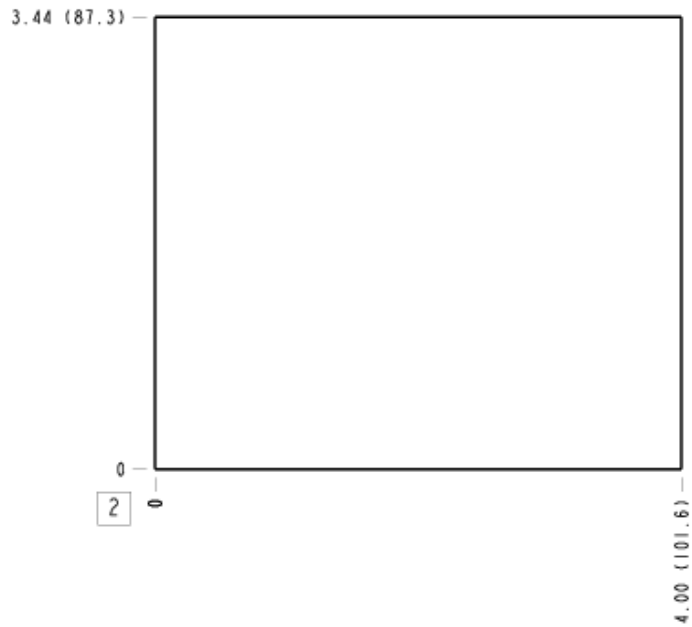


Face 5

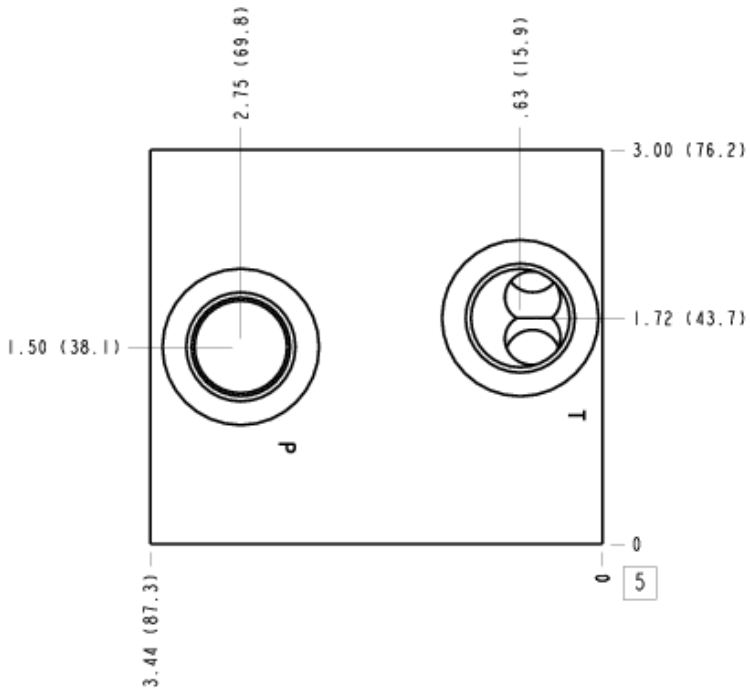


© 2026 Sun Hydraulics

Face 6

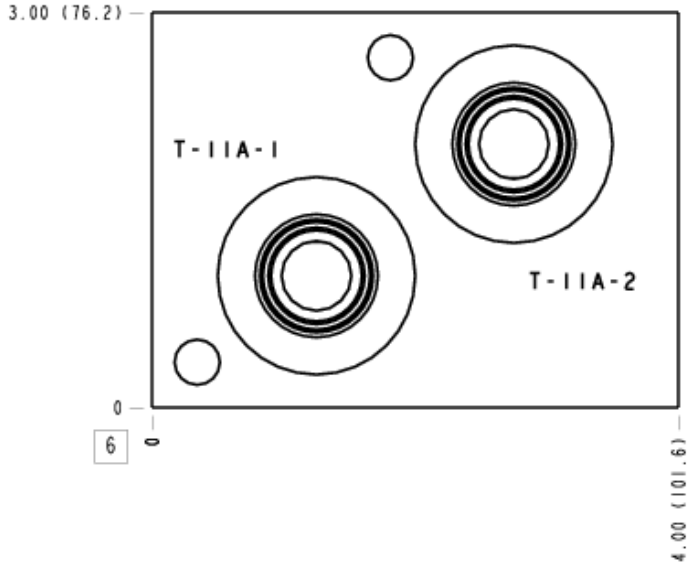


Face 7

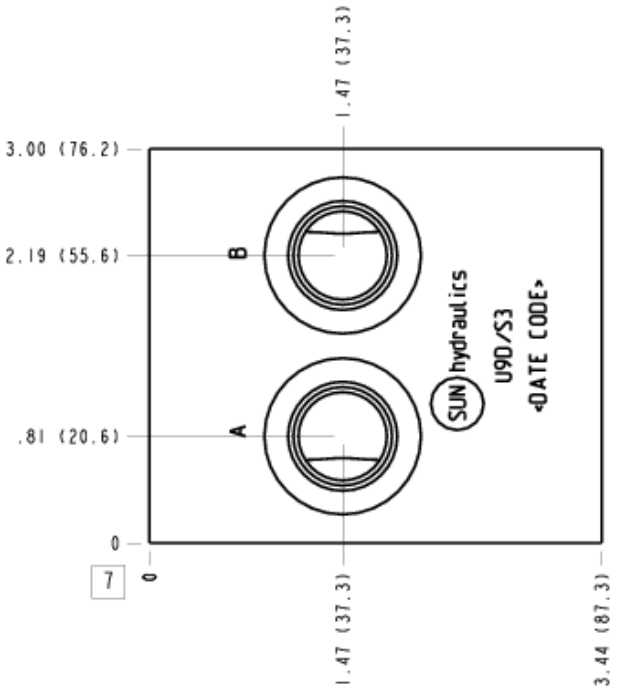

© 2026 Sun Hydraulics

Face 8

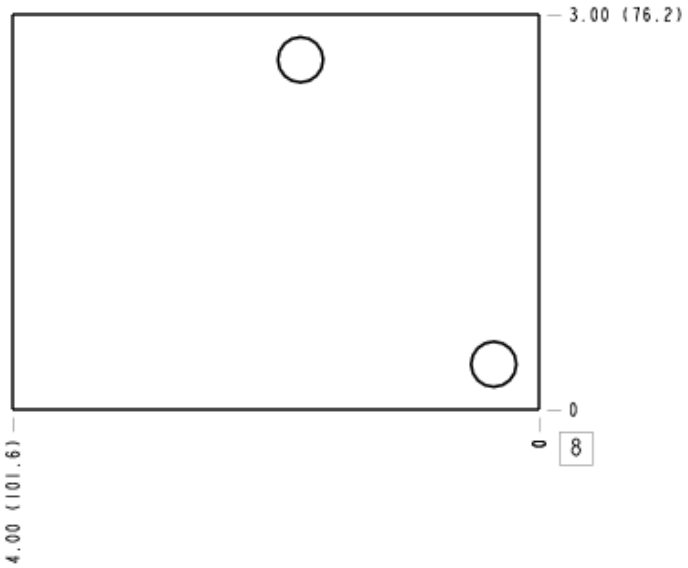

© 2026 Sun Hydraulics