


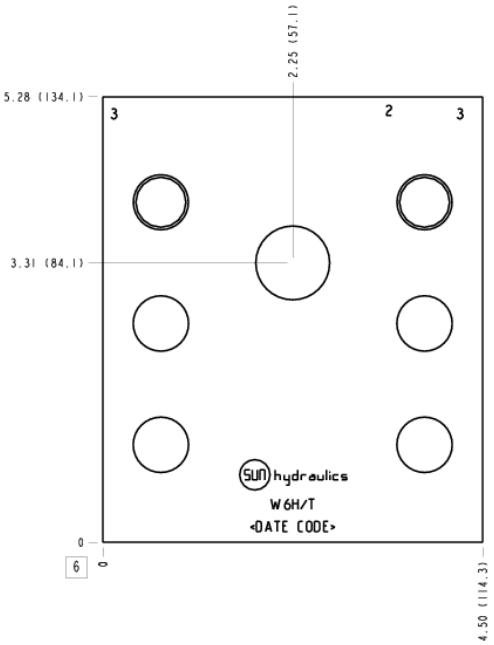

CONFIGURATION

/T	Modifier	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	1.50 SAE C62
Body Features	Direct mount
Mounting Hole Diameter	.66 in.
Mounting Hole Thread	.625-11 UNC - 2B in.
Mounting Hole Thread	M16x2,0 - 6H (metric models)
Mounting Hole Depth	35,0 mm
Open Cavities	1
Cavity	T-17A
Port Size	1 1/2" Code 62
Model Weight	9.22 kg.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
W6H, /10, /11, /15, /16, /V	Ports 1 & 2: 1 1/2" Code 62; Port 3: SAE 6;
W6H/1A, /1B, /1F, /1G, /M, /Z	Ports 1 & 2: 1 1/2" Code 62; Port 3: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-225	O-Ring	1

CONFIGURATION OPTIONS
Model Code Example: W6HArray

MODIFIER **(/T)**

- **/T** 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
- 6061-T651 Aluminum, Buna-N
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/15** 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/16** 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/1A** 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/1B** 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/1F** 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/1G** 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/M** 6061-T651 Aluminum, Metric, Buna-N
- **/V** 6061-T651 Aluminum, Viton
- **/Z** 6061-T651 Aluminum, Metric, Viton
- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S5** 65-45-12 Ductile Iron, Buna-N, Electroless Nickel
- **/T3** 65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/T4** 65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
- **/T5** 65-45-12 Ductile Iron, Metric, Buna-N, Electroless Nickel
- **/W** 65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil
- **/W3** 65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer
- **/W4** 65-45-12 Ductile Iron, Metric, Viton, Chem. Black
- **/W5** 65-45-12 Ductile Iron, Metric, Viton, Electroless Nickel
- **/Y** 65-45-12 Ductile Iron, Viton, Dewatering Oil
- **/Y1** 65-45-12 Ductile Iron, Viton, Clear Zinc Nickel with Top Sealer
- **/Y3** 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
- **/Y4** 65-45-12 Ductile Iron, Viton, Chem. Black
- **/Y5** 65-45-12 Ductile Iron, Viton, Electroless Nickel


MANIFOLD FACES

FACE GRID

© 2026 Sun Hydraulics


1	2	3	4
5	6	7	8
9	10	11	12

Face 2

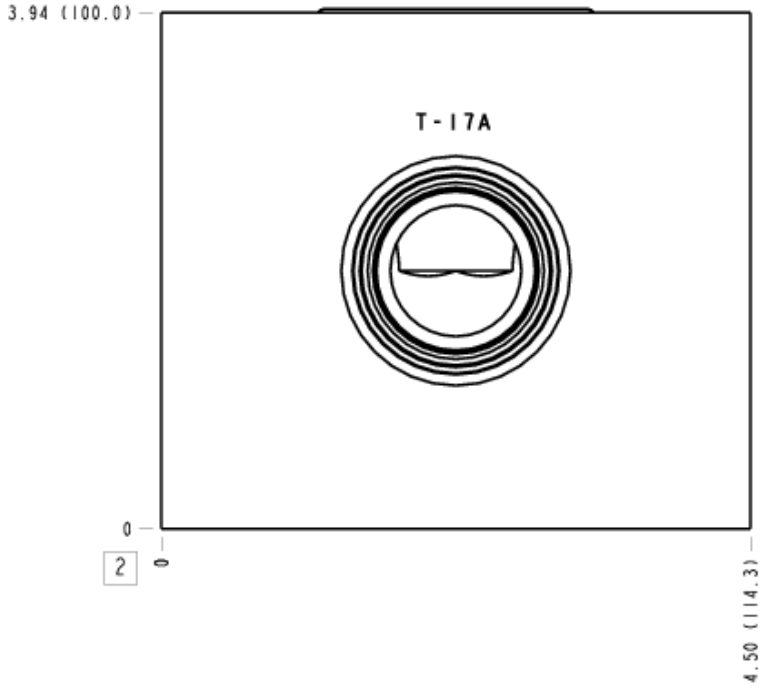


© 2026 Sun Hydraulics

Face 5

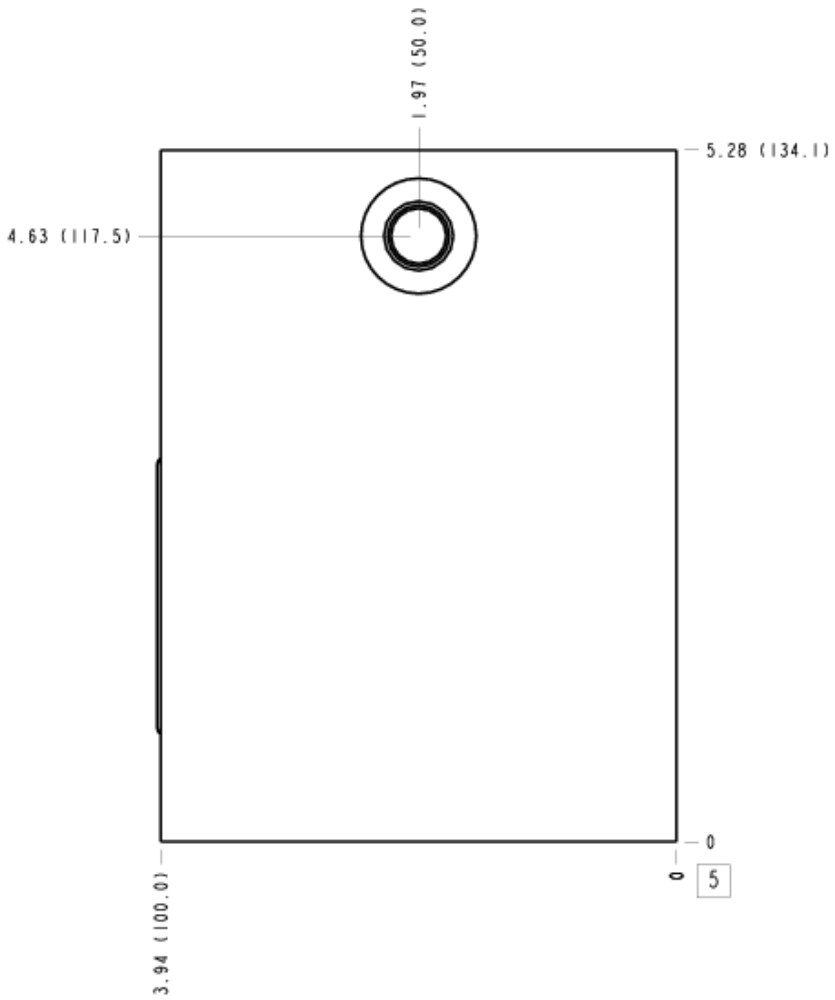


© 2026 Sun Hydraulics

Face 6

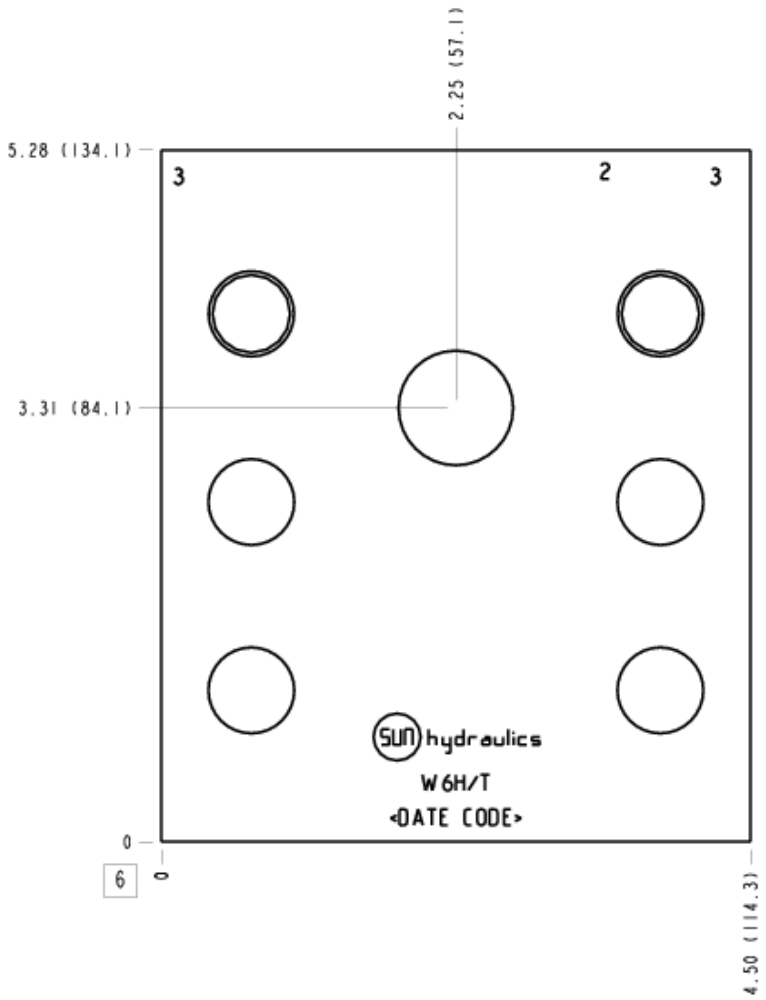


© 2026 Sun Hydraulics

Face 7

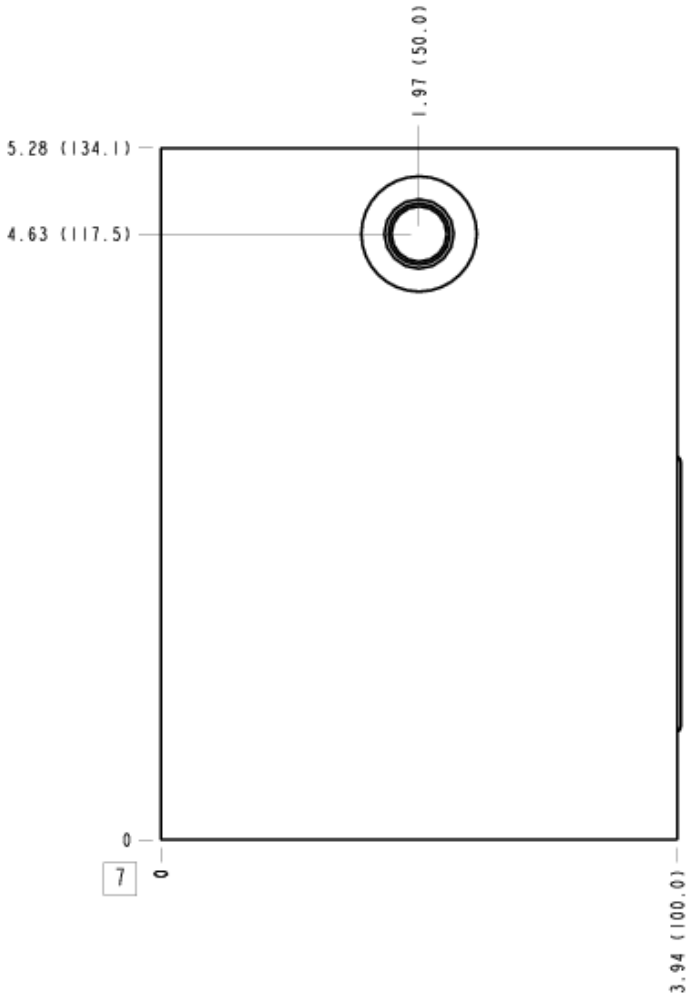

Face 8

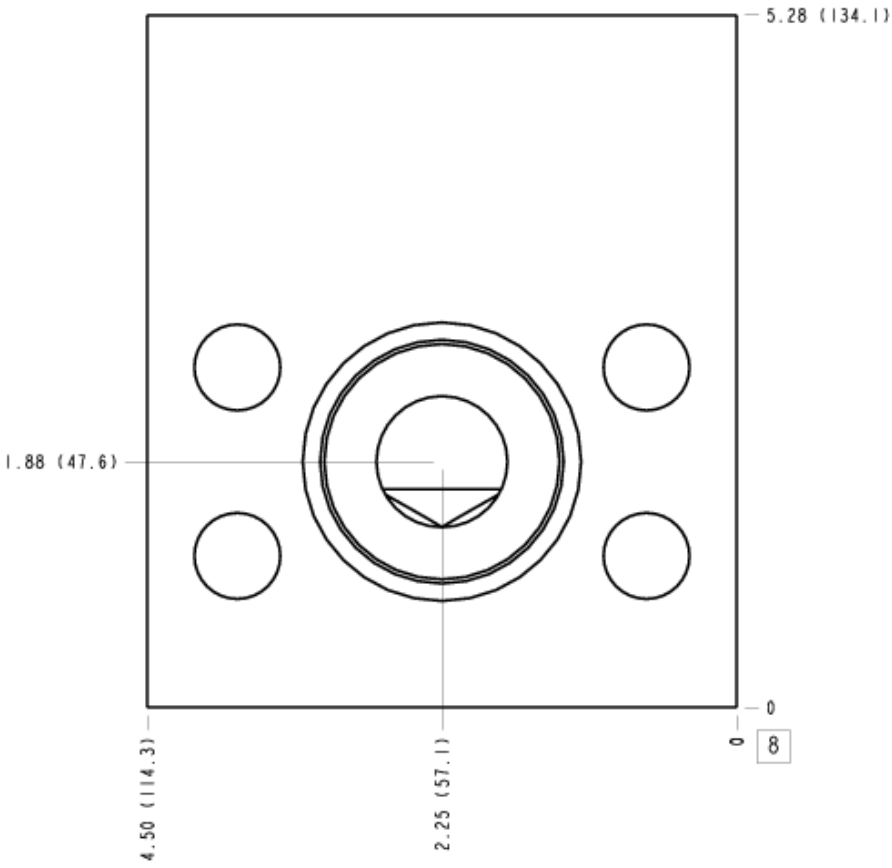

© 2026 Sun Hydraulics

© 2026 Sun Hydraulics