


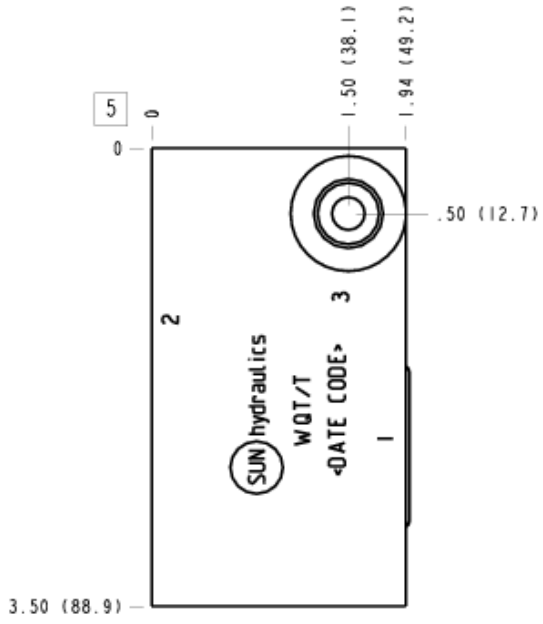

CONFIGURATION

/T	Modifier	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	0.75 SAE C62
Body Features	Direct mount
Mounting Hole Diameter	.41 in.
Mounting Hole Diameter	.42 in. (metric models)
Mounting Hole Quantity	4
Open Cavities	1
Cavity	T-2A
Port Size	3/4" Code 62
Model Weight	4.14 lb.

NOTES

- Flange mounting hole data: Inch: 3/8-16 UNC x .94 (23,9 mm) DP, Metric: M10 x 1.5-6H x .94 (23,9 mm) DP
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
WQT, /10, /11, /15, /16, /V	Ports 1 & 2: 3/4" Code 62; Port 3: SAE 6;
WQT/1A, /1B, /1F, /1G, /M, /Z	Ports 1 & 2: 3/4" Code 62; Ports 3 & 4: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-214	O-Ring	1

CONFIGURATION OPTIONS
Model Code Example: WQTArray

MODIFIER **(/T)**

- **/T** 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
- 6061-T651 Aluminum, Buna-N
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/15** 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/16** 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/1A** 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/1B** 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/1F** 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/1G** 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/M** 6061-T651 Aluminum, Metric, Buna-N
- **/V** 6061-T651 Aluminum, Viton
- **/Z** 6061-T651 Aluminum, Metric, Viton
- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S5** 65-45-12 Ductile Iron, Buna-N, Electroless Nickel
- **/T3** 65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/T4** 65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
- **/T5** 65-45-12 Ductile Iron, Metric, Buna-N, Electroless Nickel
- **/W** 65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil
- **/W3** 65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer
- **/W4** 65-45-12 Ductile Iron, Metric, Viton, Chem. Black
- **/W5** 65-45-12 Ductile Iron, Metric, Viton, Electroless Nickel
- **/Y** 65-45-12 Ductile Iron, Viton, Dewatering Oil
- **/Y1** 65-45-12 Ductile Iron, Viton, Clear Zinc Nickel with Top Sealer
- **/Y3** 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
- **/Y4** 65-45-12 Ductile Iron, Viton, Chem. Black
- **/Y5** 65-45-12 Ductile Iron, Viton, Electroless Nickel


MANIFOLD FACES

FACE GRID


© 2026 Sun Hydraulics

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

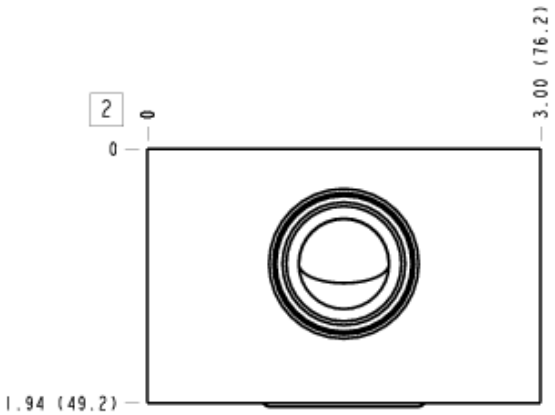


Face 5

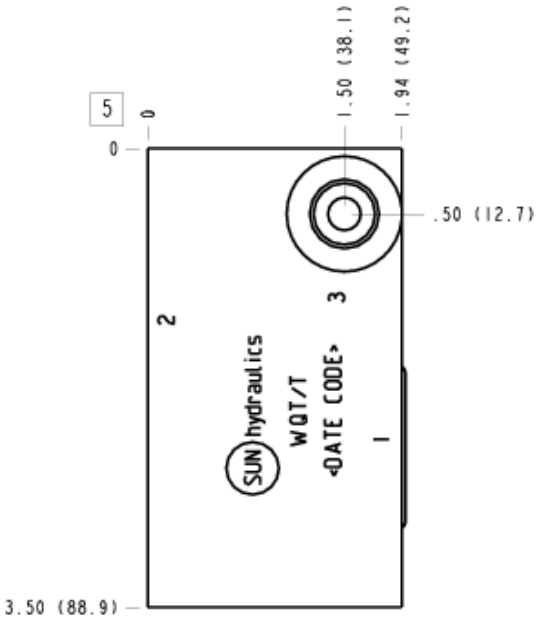


© 2026 Sun Hydraulics

Face 6

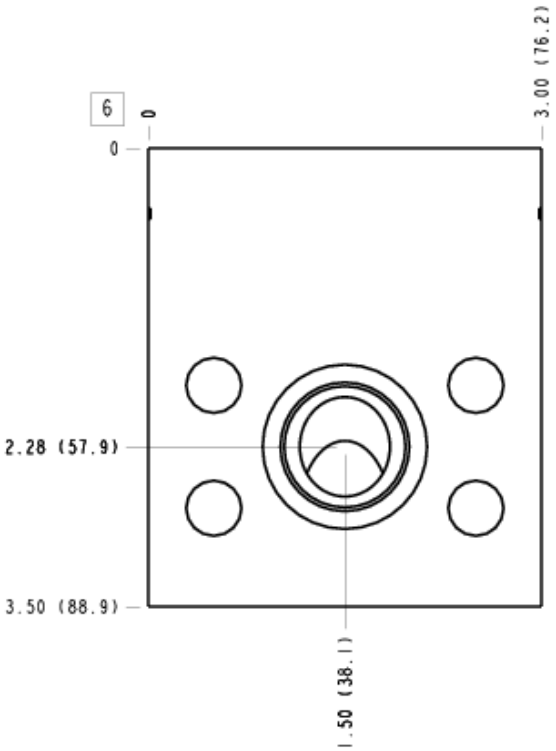


Face 7

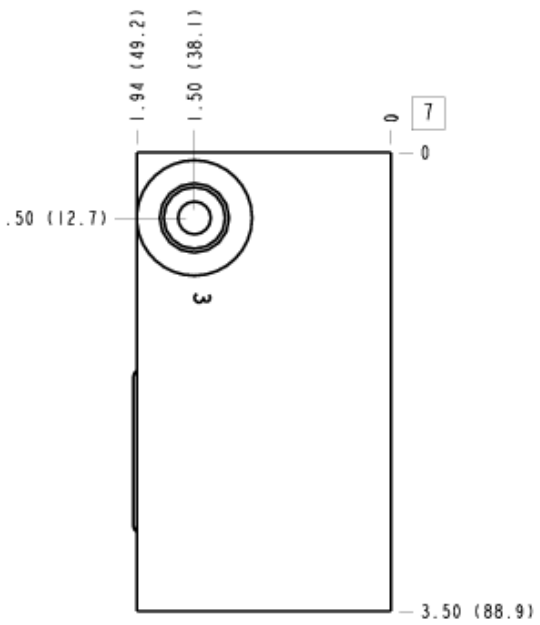


© 2026 Sun Hydraulics

Face 8

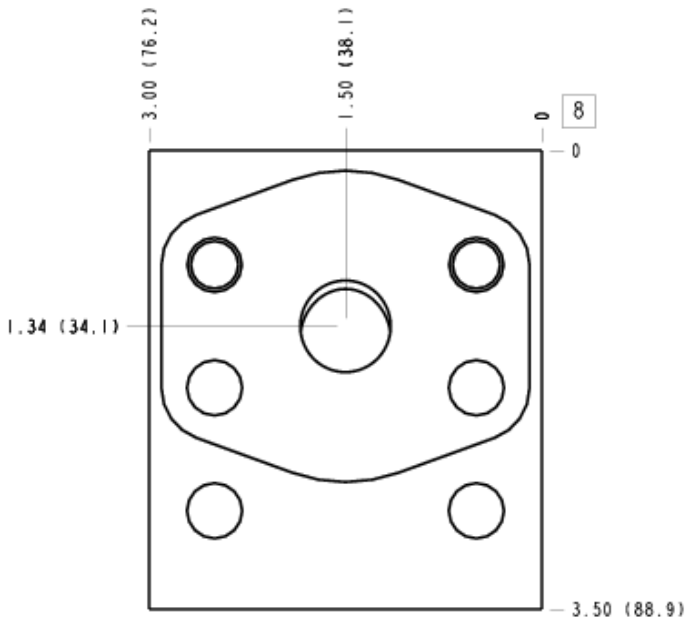

Face 10

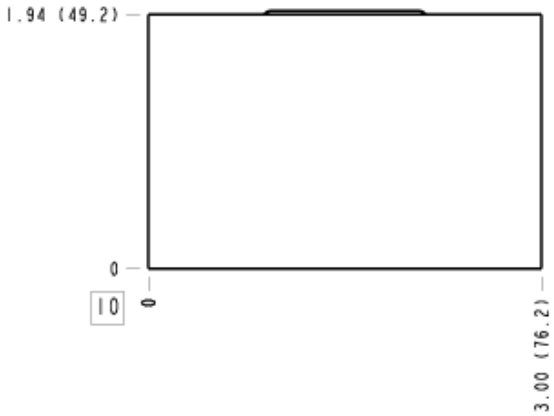

© 2026 Sun Hydraulics