

MODEL
XBOA

Port 1 to 2 open, port 3 blocked cavity plug
SERIES 2 / CAVITY: T-2A

sunhydraulics.com/model/XBOA



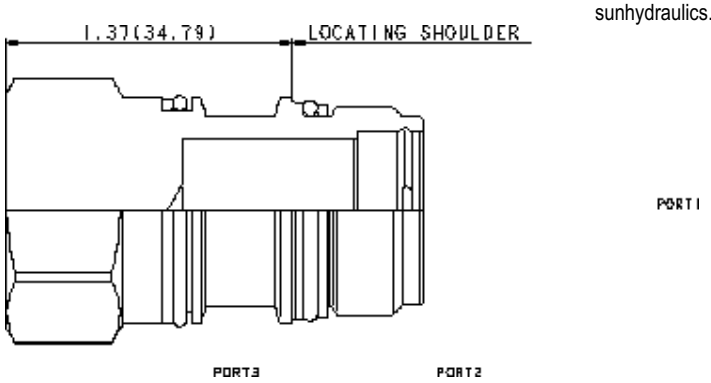

CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

This cavity plug allows ports 1 and 2 to remain open and blocks port 3.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-2A
Series	2
Maximum Operating Pressure	350 bar
Port Configuration	3 Port
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 990202007
Seal kit - Cartridge	Polyurethane: 990002002
Seal kit - Cartridge	Viton: 990202006
Model Weight	0.16 kg.

CONFIGURATION OPTIONS

Model Code Example: XBOAXXN

CONTROL (X)	ADJUSTMENT RANGE (X)	SEAL MATERIAL (N)	MATERIAL/COATING
X -	**X** -	**N** Buna-N	Standard Material/Coating
		V Viton	**/AP** Stainless Steel, Passivated
			/LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Corrosion resistant cavity plugs are intended for use in corrosive environments and are identified by the model code suffix /AP (see CONFIGURATION section). The bodies of these plugs are made from high strength lean duplex stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard plugs.

RELATED MODELS

- XBOAE Port 1 to 2 open, port 3 blocked cavity plug with SAE-4 external port

© 2025 Sun Hydraulics