

MODEL
XZOA

All ports open cavity plug
CAVITY: T-162A

sunhydraulics.com/model/XZOA



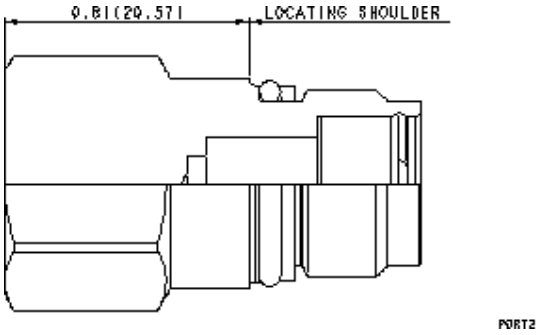

CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

This cavity plug allows all ports to remain open.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-162A
Series	0
Maximum Operating Pressure	350 bar
Port Configuration	2 Port
Valve Hex Size	19,1 mm
Valve Installation Torque	27 - 33 Nm
Seal kit - Cartridge	Buna: 990162007
Seal kit - Cartridge	EPDM: 990162014
Seal kit - Cartridge	Polyurethane: 990162002
Seal kit - Cartridge	Viton: 990162006
Model Weight	0.06 kg.

CONFIGURATION OPTIONS

Model Code Example: XZOAXXN

CONTROL (X)	ADJUSTMENT RANGE (X)	SEAL MATERIAL (N)	MATERIAL/COATING
X -	**X** -	**N** Buna-N	Standard Material/Coating
		E EPDM	**/AP** Stainless Steel, Passivated
		V Viton	**/LH** Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.

© 2025 Sun Hydraulics