


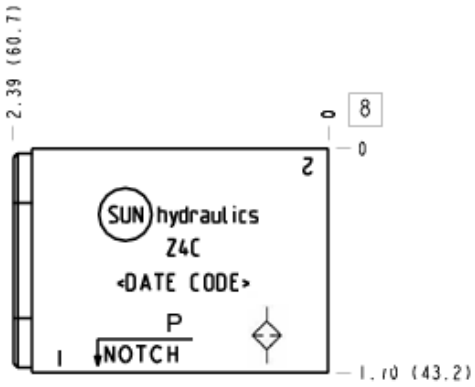

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	On P or T
Stack Height	1.75 in.
Open Cavities	1
Cavity	T-13A
Model Weight	0.58 lb.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2025 Sun Hydraulics

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS
Model Code Example: Z4C

MODIFIER

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/V 6061-T651 Aluminum, Viton

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y1 65-45-12 Ductile Iron, Viton, Clear Zinc Nickel with Top Sealer

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black


/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES

FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

Face 2

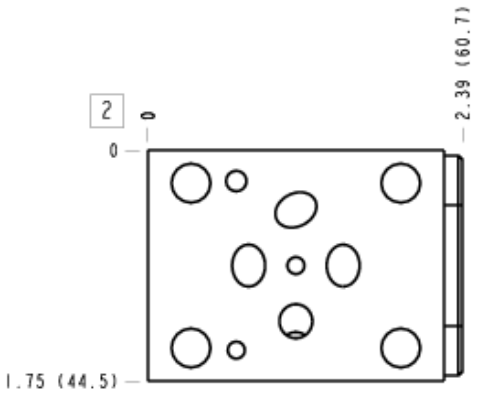


© 2025 Sun Hydraulics


Face 5

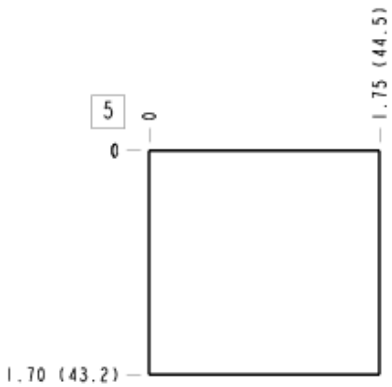


Face 6

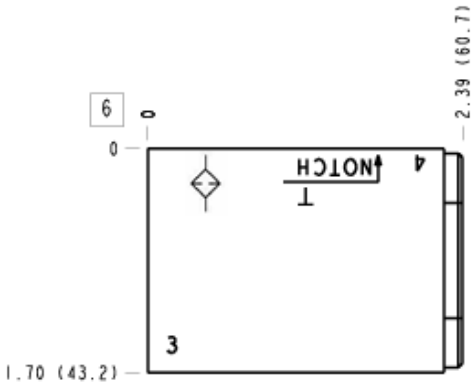

Face 7

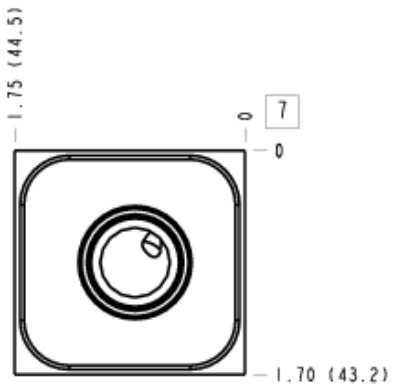


Face 8

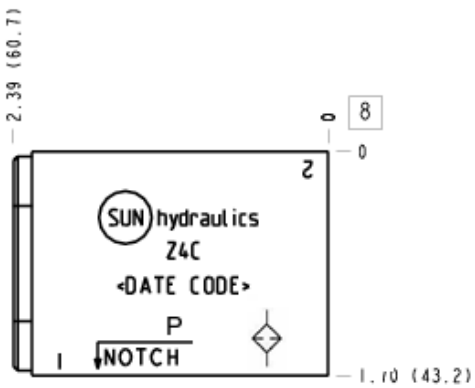

© 2025 Sun Hydraulics

Face 10

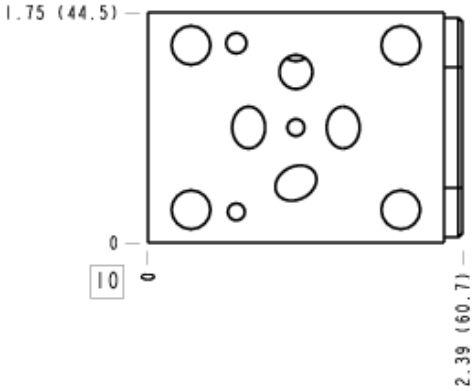

© 2025 Sun Hydraulics