
Eaton/Char-Lynn 2000: Cross pilot on B with shuttle
CAVITY: T-2A

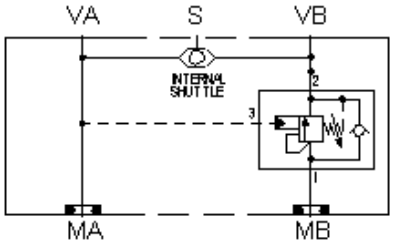

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Motor mount
Interface	Eaton/Char-Lynn 2000
Body Features	Cross pilot on B with shuttle
Mounting Hole Diameter	.41 in.
Mounting Hole C'bore Diameter	.59 in.
Mounting Hole C'bore Depth	.38 in.
Mounting Hole Quantity	3
Open Cavities	1
Cavity	T-2A
Port Size	3/4" BSPP
Model Weight	6.02 lb.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
ZNR, /10, /11, /15, /16, /V	Ports VA & VB: 3/4" BSPP; Port S: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
260-010	Seat	1
340-002	Pipe Plug	1
500-001-117	O-Ring	2
800-001-070	Ball	1

CONFIGURATION OPTIONS
Model Code Example: ZNRArray

MODIFIER (/S)

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/V 6061-T651 Aluminum, Viton

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black

/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel

© 2026 Sun Hydraulics