


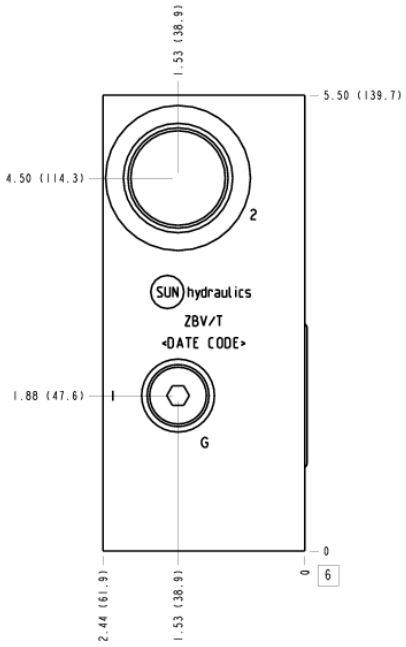

CONFIGURATION

/T	Modifier	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	1.25 SAE C62
Body Features	Sandwich mount through port
Mounting Hole Diameter	.53 in.
Mounting Hole Diameter	.59 in. (metric models)
Mounting Hole Depth	Through
Mounting Hole Quantity	4
Open Cavities	1
Cavity	T-3A
Port Size	1-1/4" C62
Model Weight	7.55 lb.

NOTES

- This manifold is designed to work with an inch based flange.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2026 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
ZBV, /10, /11, /15, /16, /1A, /1B, /1F, /1G, /M, /S, /S3, /T, /T3, /V, /W, /W3, /Y, /Y3, /Z	Port 1: 1 1/4" Code 62; Port 2: 1" BSPP; Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	2
500-001-222	O-Ring	1

CONFIGURATION OPTIONS
Model Code Example: ZBVArray

MODIFIER **(/T)**

/T 65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/1A 6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/1B 6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/1F 6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/1G 6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/M 6061-T651 Aluminum, Metric, Buna-N

/V 6061-T651 Aluminum, Viton

/Z 6061-T651 Aluminum, Metric, Viton

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

/T3 65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer

/T4 65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black

/T5 65-45-12 Ductile Iron, Metric, Buna-N, Electroless Nickel

/W 65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil

/W3 65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer

/W4 65-45-12 Ductile Iron, Metric, Viton, Chem. Black

/W5 65-45-12 Ductile Iron, Metric, Viton, Electroless Nickel

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black

/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel


MANIFOLD FACES

FACE GRID


© 2026 Sun Hydraulics

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

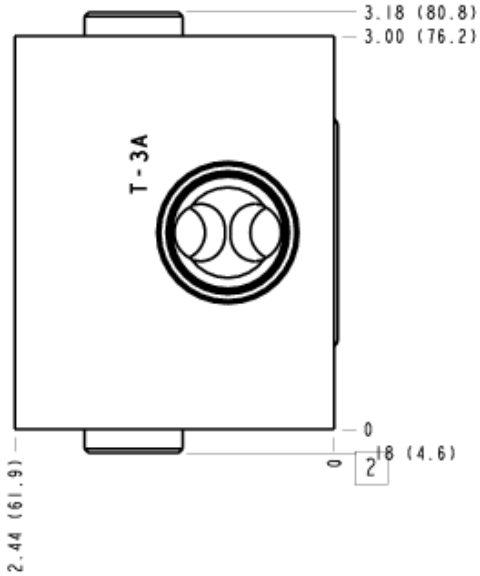


Face 5

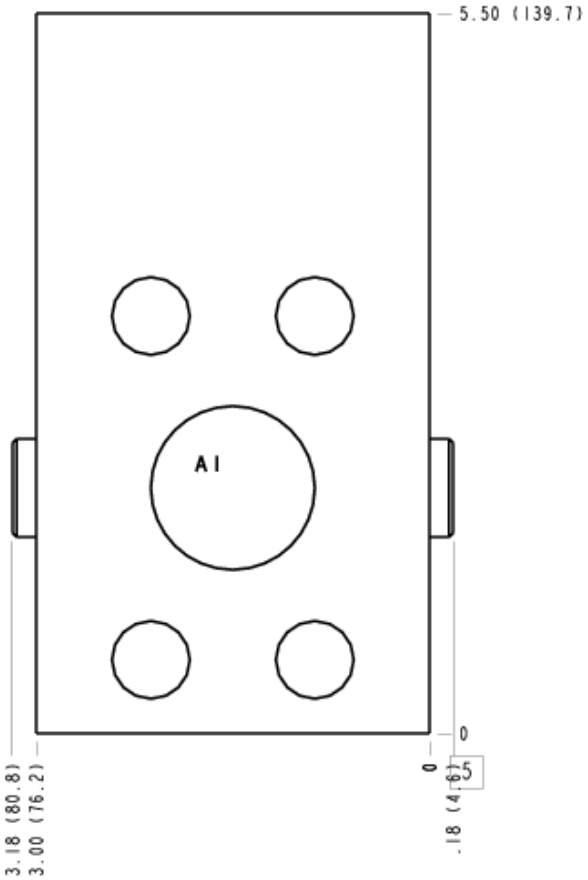


© 2026 Sun Hydraulics

Face 6

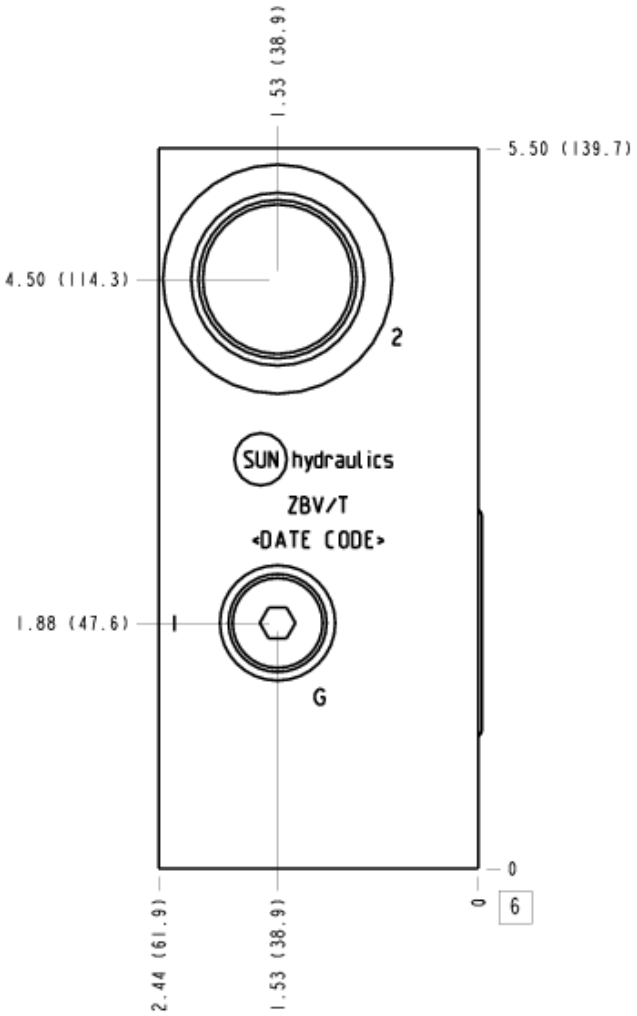


© 2026 Sun Hydraulics

Face 7

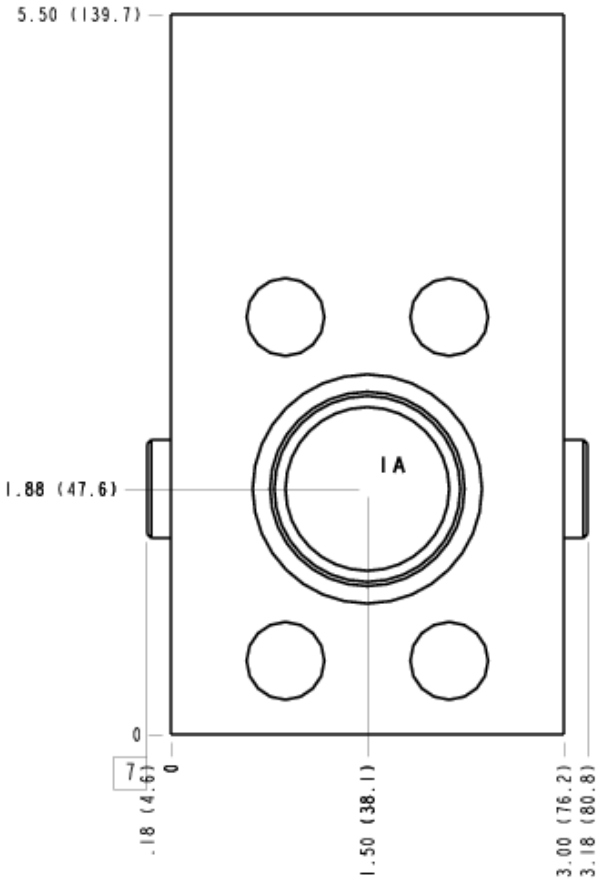


© 2026 Sun Hydraulics

Face 8

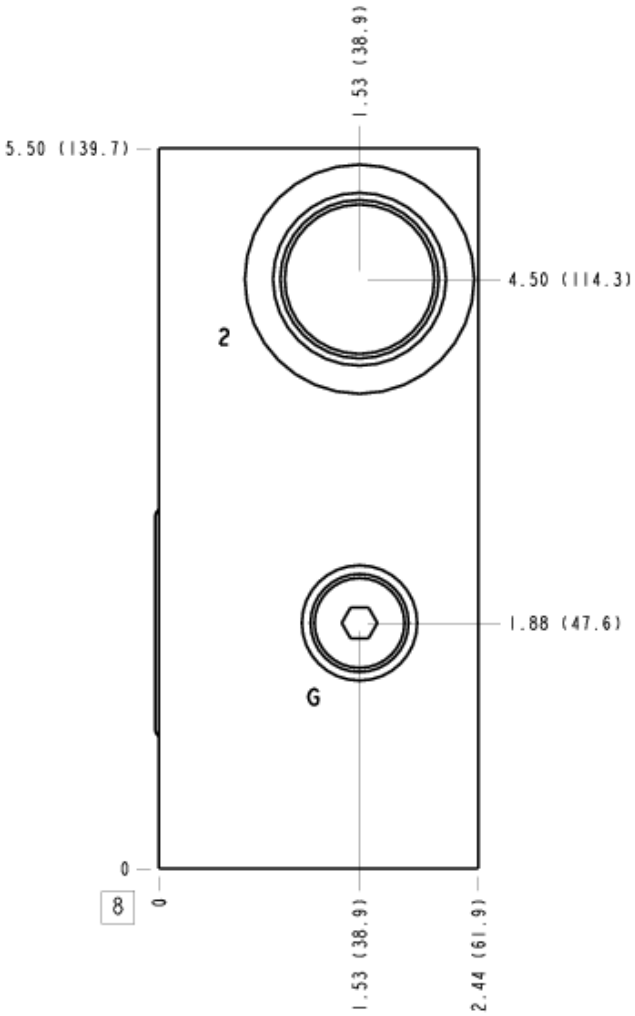

Face 10

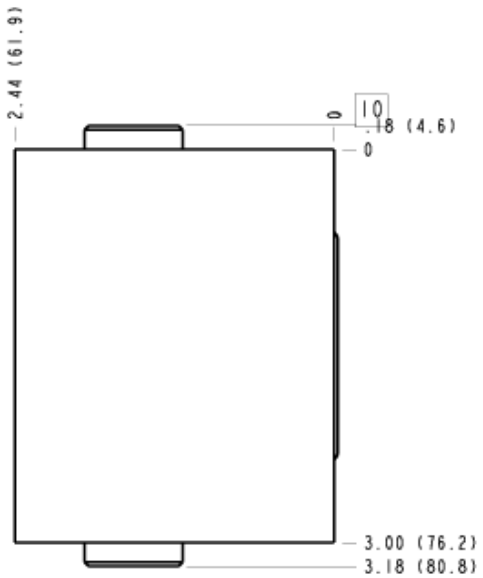

© 2026 Sun Hydraulics