


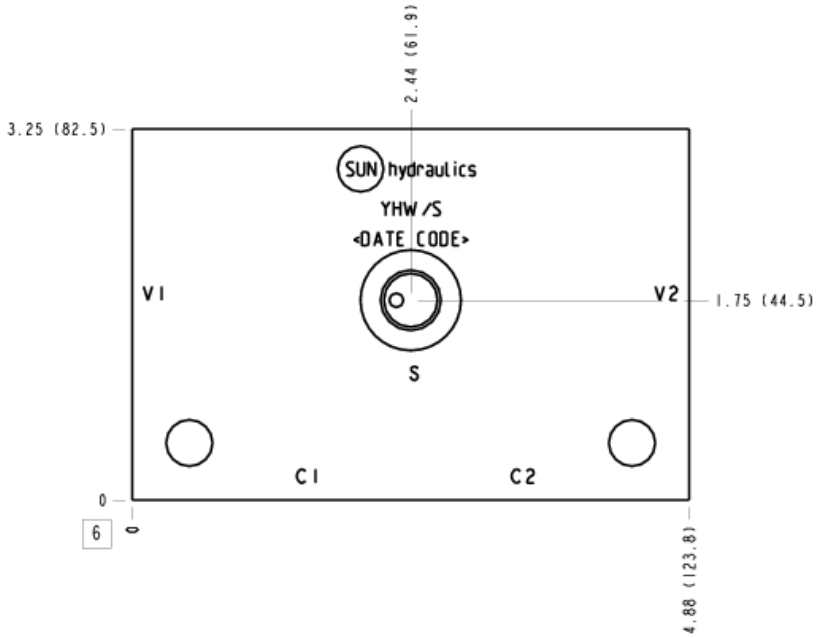

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Cross pilot with shuttle
Mounting Hole Diameter	.41 in.
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	2
Cavity	T-2A
Port Size	3/4" BSPP
Model Weight	4.33 lb.

NOTES

- Shuttle is accessible through the V2 port.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2025 Sun Hydraulics

PORT DESIGNATORS

Modifiers	Ports
YHW, /10, /11, /15, /16, /V	Ports C1, C2, V1, V2: 3/4" BSPP; Port S: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
CSZNXXN	Cartridge	1

CONFIGURATION OPTIONS
Model Code Example: YHW/S

MODIFIER **(/S)**


- **/S** 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
  6061-T651 Aluminum, Buna-N
- **/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/V** 6061-T651 Aluminum, Viton
- **/16** 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- **/15** 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- **/S4** 65-45-12 Ductile Iron, Buna-N, Chem. Black
- **/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- **/Y** 65-45-12 Ductile Iron, Viton, Dewatering Oil
- **/Y4** 65-45-12 Ductile Iron, Viton, Chem. Black
- **/Y3** 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES

FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

Face 2

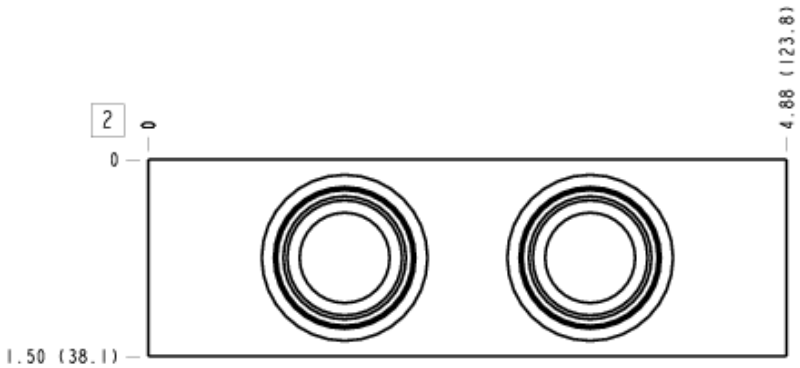


© 2025 Sun Hydraulics

Face 5

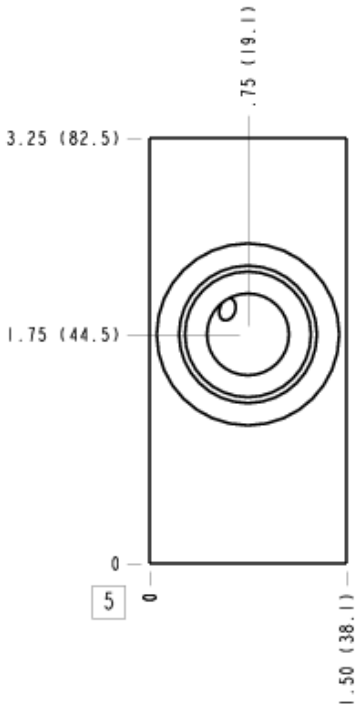


Face 6

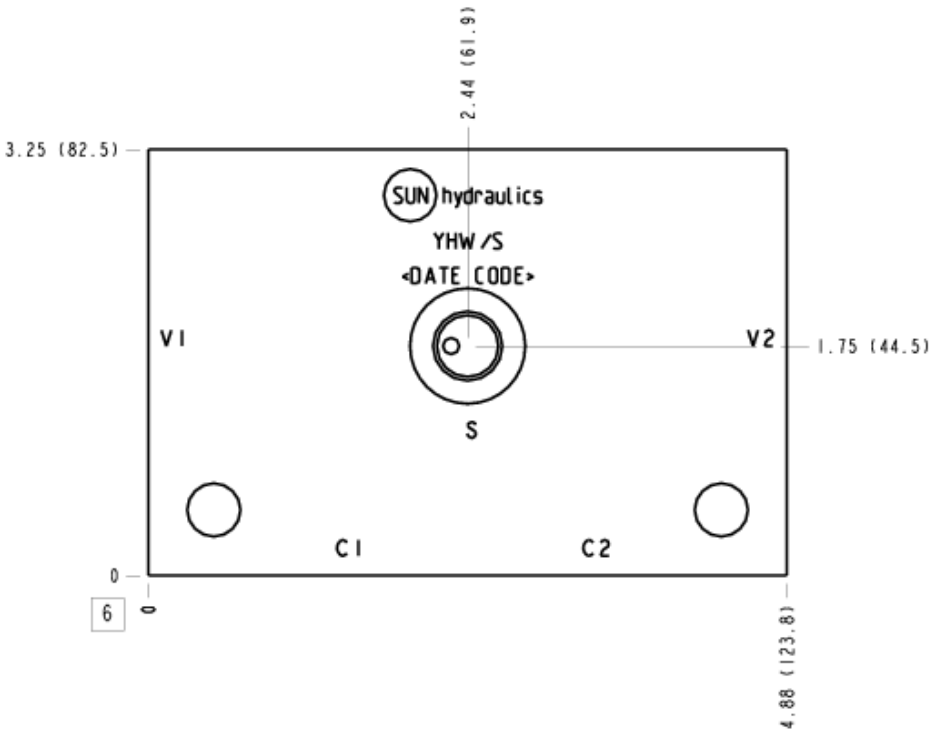


© 2025 Sun Hydraulics

Face 7

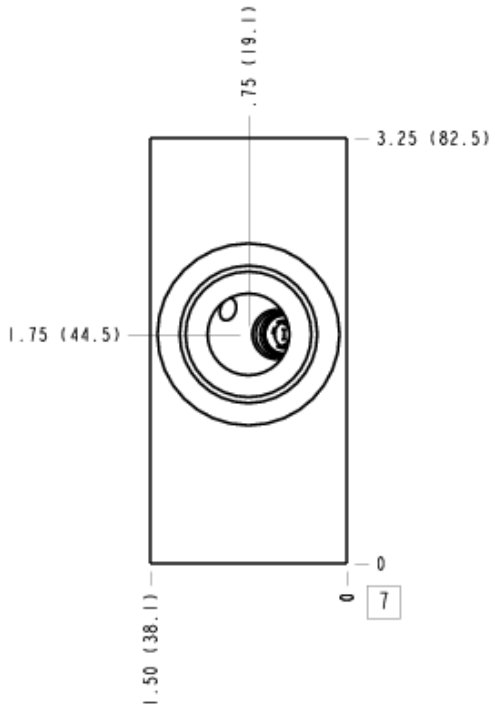


Face 8

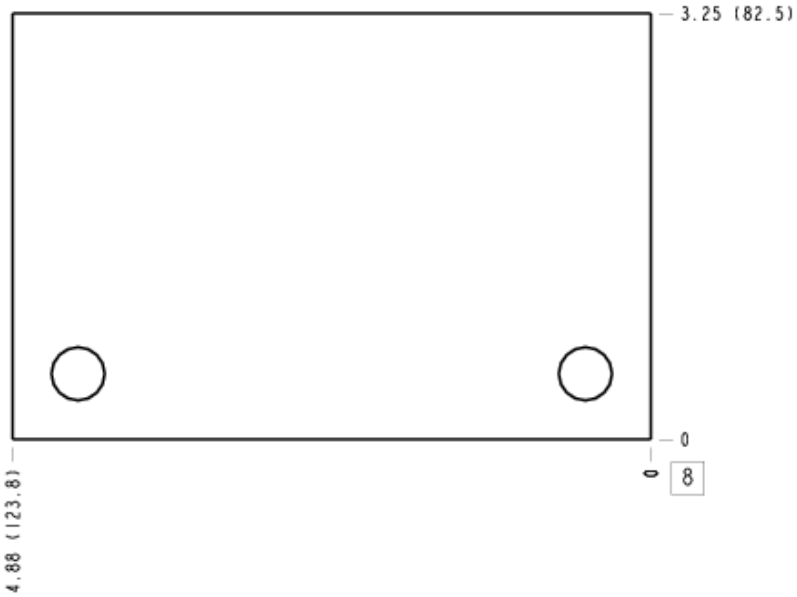

© 2025 Sun Hydraulics

Face 10

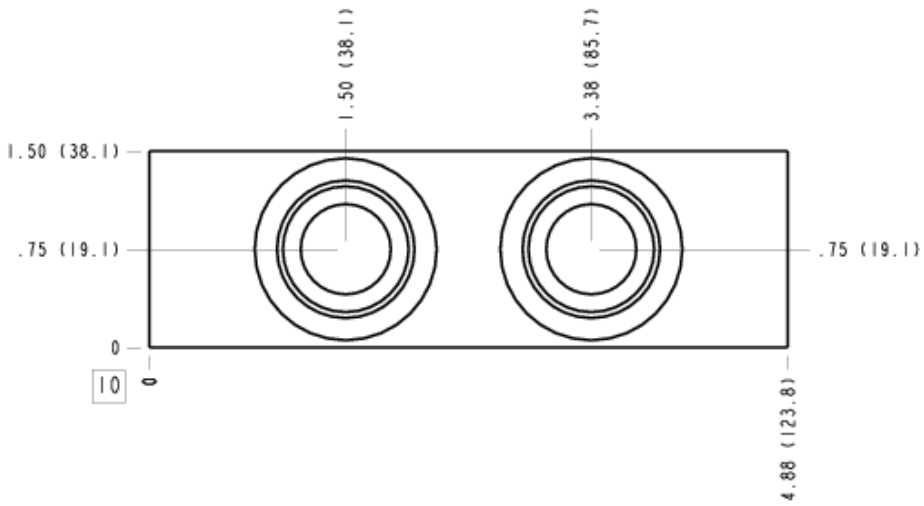

© 2025 Sun Hydraulics