
MODEL
990017002

Series 3 - T-17A cavity, Polyurethane, cartridge seal kit
SERIES 3 / CAVITY: T-17A

sunhydraulics.com/model/990017002

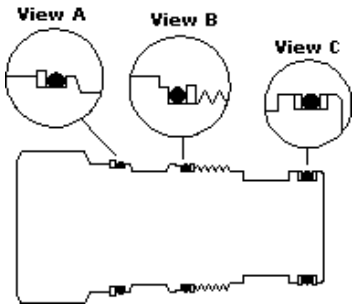

Sun offers replacement seal kits for all cartridge models. These kits include all of the external seals on the cartridge along with installation instructions. Seal kits are available in Buna-N and Viton for all models, along with EPDM and polyurethane for many models. Please note: Converting the external seals from one material to another does not ensure fluid compatibility with that material due to the existence of internal seals within the cartridge.

TECHNICAL DATA

Series	3
Cartridge Thread	1"-14 UNS
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Cavity	T-17A
Model Weight	0.00 kg.

NOTES

- Install back-up rings and O-rings as shown in views.
- When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
- When installing cartridge - be sure to torque to recommended value.

INCLUDED COMPONENTS

Part	Description	Quantity	View
500-202-120	O-Ring	1	C
500-202-124	O-Ring	1	B
500-202-126	O-Ring	1	A
540-002-121	Backup Ring	2	C
540-002-123	Backup Ring	1	B
540-002-126	Backup Ring	1	A

USED WITH

CBFA	CBFB	CBFC	CBFD	CBFG	CBFL	CBGA	CBGB	CBGG	CBGH
CBGL	CBGY	CKGB	CKGD	CKGV	CNGD	CNGE	CNHE	COHA	CXGE
CXHC	DKHC	DKHD	DOHC	DOHD	FREA	LKHC	LKHCZ	LOGCZ	LOHA
LOHA8	LOHB	LOHB8	LOHC	LOHCZ	LOHD	LOHD8	LOHO	LOHOZ	LPHA
LPHC	LRHA	LRHC	PBHB	PBHB8	PBHC	PBHF	PBHF8	PPHB	PPHB8
PPHC	PPHF	PPHF8	PRHB	PRHR	RSHC	RSHC8	RSHE	RVGA	RVGB
SCGA	SQHB	XHBA	XHCA	XHOA	XHOAE	XHOB	XHOC		

TECHNICAL FEATURES

- The shelf life for this cartridge seal kit is ten years from date of purchase. This date will be printed on the kit packaging.
- Polyurethane seals have a higher tensile strength, are more abrasion/extrusion resistant, and are well suited for high cycle and high pressure applications.

© 2026 Sun Hydraulics