
MODEL
990019002

Series 4 - T-19A cavity, Polyurethane cartridge seal kit
SERIES 4 / CAVITY: T-19A

sunhydraulics.com/model/990019002

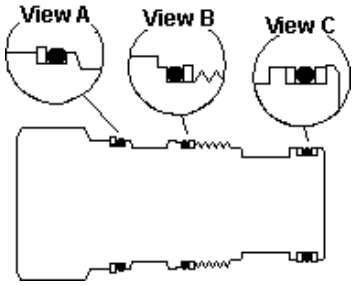

Sun offers replacement seal kits for all cartridge models. These kits include all of the external seals on the cartridge along with installation instructions. Seal kits are available in Buna-N and Viton for all models, along with EPDM and polyurethane for many models. Please note: Converting the external seals from one material to another does not ensure fluid compatibility with that material due to the existence of internal seals within the cartridge.

TECHNICAL DATA

Series	4
Cartridge Thread	M48
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Cavity	T-19A
Model Weight	0.00 kg.

NOTES

- Install back-up rings and O-rings as shown in views.
- When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
- When installing cartridge - be sure to torque to recommended value.

INCLUDED COMPONENTS

Part	Description	Quantity	View
500-202-127	O-Ring	1	C
500-202-131	O-Ring	1	B
500-202-134	O-Ring	1	A
540-002-127	Backup Ring	2	C
540-002-131	Backup Ring	1	B
540-002-134	Backup Ring	1	A

USED WITH

CBHA	CBHG	CBIA	CBIB	CBIG	CBIH	CBIL	CBIY	CKIB	CKID
CKIV	CNID	CNJE	COJA	COKA	CXIE	CXJC	DKJC	DKJD	DOJC
DOJD	FRFA	LKJC	LKJCZ	LOJA	LOJA8	LOJB	LOJB8	LOJC	LOJCZ
LOJD	LOJD8	LOJO	LOJOZ	LOKA	LOKA8	LOKB	LOKB8	LOKC	LOKCZ
LOKD	LOKD8	LOKO	LOKOZ	LPJA	LPJA8	LPJC	LRJA	LRJC	PBJB
PBJB8	PBJC	PBJF	PBJF8	PPJB	PPJB8	PPJC	PPJF	PPJF8	PRJB
PRJR	RSJC	RSJC8	RSJE	RVIA	RVIB	SCIA	SQJB	XJBA	XJCA
XJOA	XJOB	XJOC							

TECHNICAL FEATURES

- The shelf life for this cartridge seal kit is ten years from date of purchase. This date will be printed on the kit packaging.
- Polyurethane seals have a higher tensile strength, are more abrasion/extrusion resistant, and are well suited for high cycle and high pressure applications.

© 2026 Sun Hydraulics