

MODEL
BLW

Ninety degree with high capacity port 3 and gauge port
CAVITY: T-2A

sunhydraulics.com/model/BLW



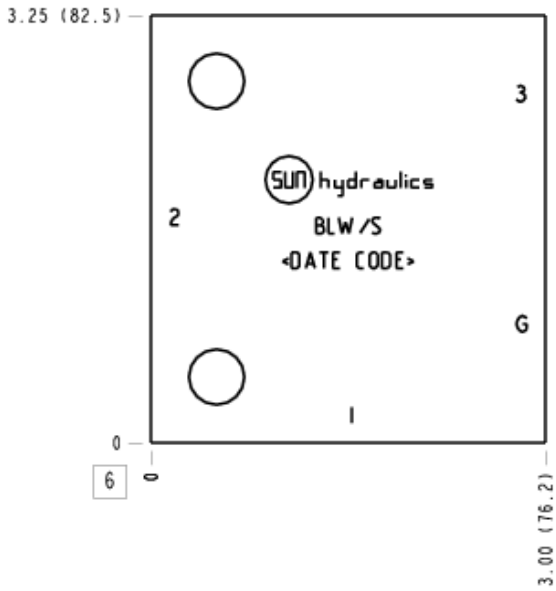

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Dewatering Oil

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Ninety degree with high capacity port 3 and gauge port
Mounting Hole Diameter	.42 in.
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-2A
Port Size	3/4" BSPP
Model Weight	2.67 lb.

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
BLW, /10, /11	Ports 1 & 2: 3/4" BSPP; Port 3: 1/2" BSPP; Gage Port: 1/4" BSPP;

CONFIGURATION OPTIONS
Model Code Example: BLWArray

MODIFIER **(/S)**

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
6061-T651 Aluminum, Buna-N

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel


© 2026 Sun Hydraulics

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12

Face 2

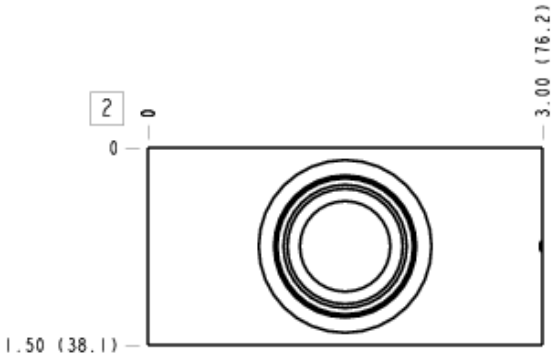


Face 5

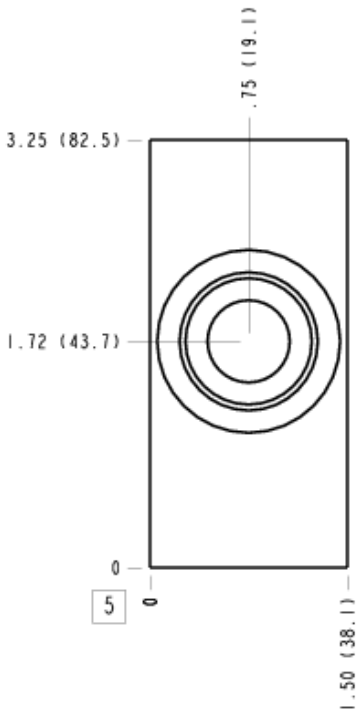


© 2026 Sun Hydraulics

Face 6

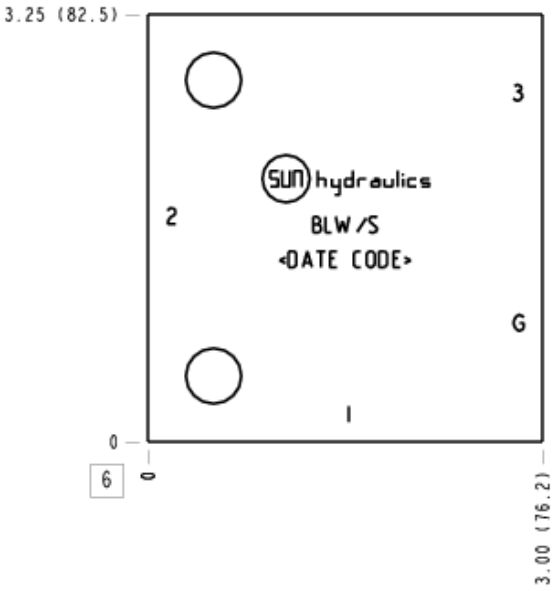


Face 7

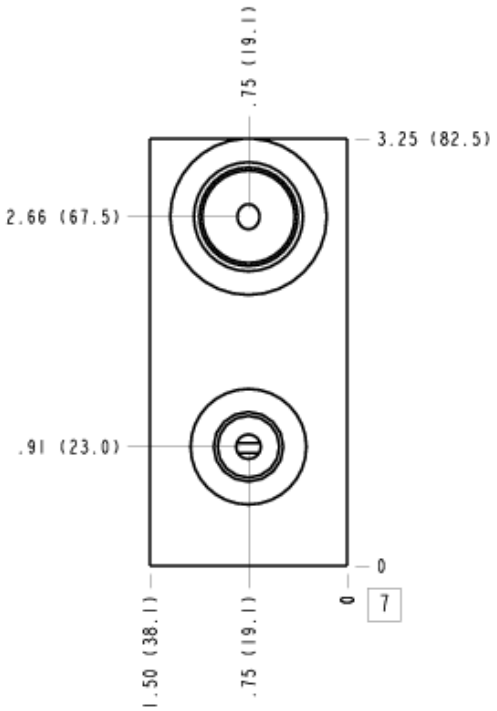


© 2026 Sun Hydraulics

Face 8

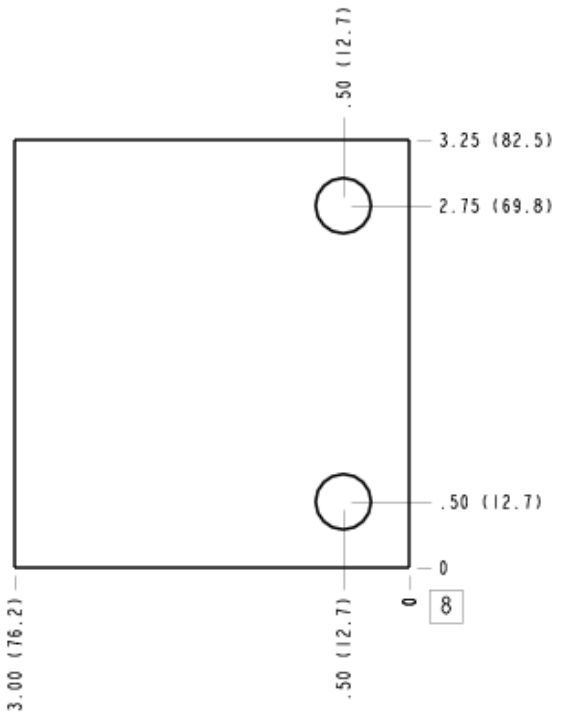

Face 10

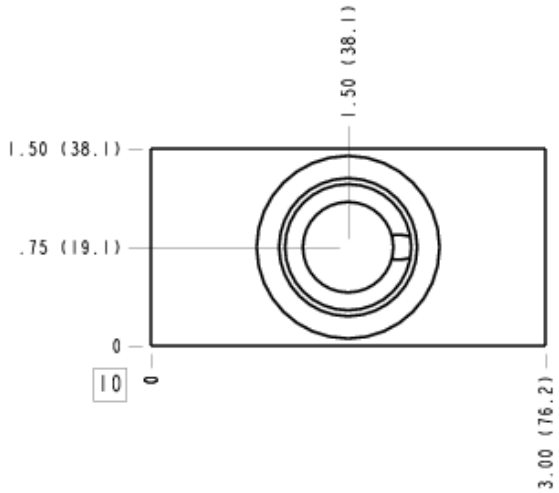

© 2026 Sun Hydraulics