


CONFIGURATION

X	Control	Mechanical Actuation
X	Spool Configuration	-
N	Seal Material	Buna-N

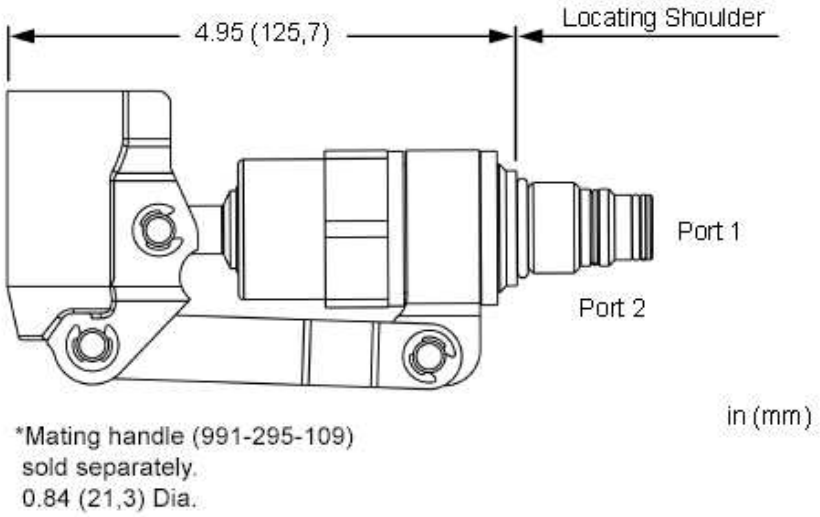

This valve is a screw-in, manual hand pump cartridge with dual integrated check valves.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	SC-10-02
Series	1C
Capacity	.442 in³
Maximum Operating Pressure	210 bar
Valve Hex Size	38,1 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 99C102007
Seal kit - Cartridge	Viton: 99C102006
Model Weight	0.92 kg.

CONFIGURATION OPTIONS

Model Code Example: HPUAXXN

CONTROL (X)	SPOOL CONFIGURATION (X)	SEAL MATERIAL (N)
X Mechanical Actuation	**X** -	**N** Buna-N

TECHNICAL FEATURES

- This valve features dual integrated check valves.
- The lever socket rotates 360°.
- Zinc plated to ASTM specifications for 240 hours of salt spray resistance.
- The seat is made from hardened steel for durability.
- The mating handle is sold separately.

© 2025 Sun Hydraulics