
STAINLESS STEEL SOLENOID VALVES
SERIES CFB-X

2/2-way - Normally Closed (NC)
3/2-way - Normally Closed (NC)



- Stainless steel version for particularly aggressive environment and fluids
- High reliability over time, even in hard working conditions
- Compact dimensions
- Suitable to control inert and medical gases, alimentary fluids and beverages

Series CFB Stainless Steel direct acting solenoid valves for general purpose, 2/2-way and 3/2-way NC, are the ideal solution for a wide range of applications whereby the environment and fluids used can be particularly aggressive and contaminating.
Special versions are available on demand.

The valve function is determined by a poppet and the operation is direct.
Different versions are available according to the nominal diameter and to the threaded ports, as shown in the following tables.
They can thus satisfy various requirements in terms of flow rates and working pressures.

General Data

TECHNICAL FEATURES	
Function	2/2 NC - 3/2 NC
Operation	Direct acting poppet type
Pneumatic connections	G1/8 ... G1/2 threads
Orifice diameter	1.5 ... 4 mm
Flow coefficient Kv (m^3/h)	0.08 ... 0.28
Operating pressure	0 ÷ 4 ... 25 bar
Operating temperature	-10 ÷ 140°C
Fluid	Air, water, liquid and gaseous fluids with max viscosity 37 cSt (5° E)
Response time	ON <15 ms - OFF <25 ms
Installation	In any position
MATERIALS IN CONTACT WITH THE MEDIUM	
Body	Stainless steel 316L
Seals	FKM - EPDM
Internal parts	
ELECTRICAL FEATURES	
Voltage	12 V DC, 24 V DC - 24V AC 50 Hz, 110 V AC 50/60 Hz, 220/230 V AC 50/60 Hz
Voltage tolerance	±5% (DC) - ±10% (AC)
Power consumption	19 W (DC) - 15 VA (AC)
Duty cycle	ED 100%
Insulation class	H (180°C)
Electrical connection	DIN EN 175-301-803-A connector
Protection class	IP65 with connector
Special versions available on demand	

It is recommended to use connections with internal diameters bigger than valve orifices, otherwise there may be a performance change.

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

STAINLESS STEEL SOLENOID VALVES
SERIES CFB-X - CODING EXAMPLES

Coding Examples

CFB	-	D	2	1	A	-	W	X	-	B8	E

CFB	SERIES
D	OPERATION D = direct
2	NUMBER OF WAYS - POSITIONS 2 = 2/2-way - NC 3 = 3/2-way - NC
1	CONNECTIONS 1 = G1/8 2 = G1/4 3 = G3/8 4 = G1/2
A	ORIFICE DIAMETER A = 1.5 mm B = 2 mm C = 2.5 mm E = 3 mm F = 4 mm
W	SEALS MATERIAL W = FKM E = EPDM
X	BODY MATERIAL X = 316L stainless steel
B8	SOLENOID DIMENSION B8 = 30 mm
E	VOLTAGE - POWER CONSUMPTION B = 24 V 50/60 Hz - 15 VA D = 110 V 50/60 Hz - 15 VA E = 230 V 50/60 Hz - 15 VA 2 = 12 V DC - 19 W 3 = 24 V DC - 19 W

Table for the coupling between solenoids and valves

For solenoids and their connectors see the dedicated section.
Coil mod. B8... - DIN EN 175 301-803-A = connector mod. 124-...

Mod.	24V AC 50 Hz	110V AC 50/60 Hz	220/230V AC 50/60 Hz	12V DC	24V DC
CFB-D21A-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D21B-.*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D21C-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D22B-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D22C-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D22E-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D23E-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D23F-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D24E-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D24F-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D32A-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D32B-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D32C-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)
CFB-D32E-*	B8B (15VA)	B8D (15VA)	B8E (15VA)	B82 (19W)	B83 (19W)


* = complete the code according to coding example


Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com

Series CFB solenoid valve - direct acting - 2/2 and 3/2 NC

The direct control of these solenoid valves allows to operate with working pressures that are equal to zero.
Ports: from G1/8 to G1/2.





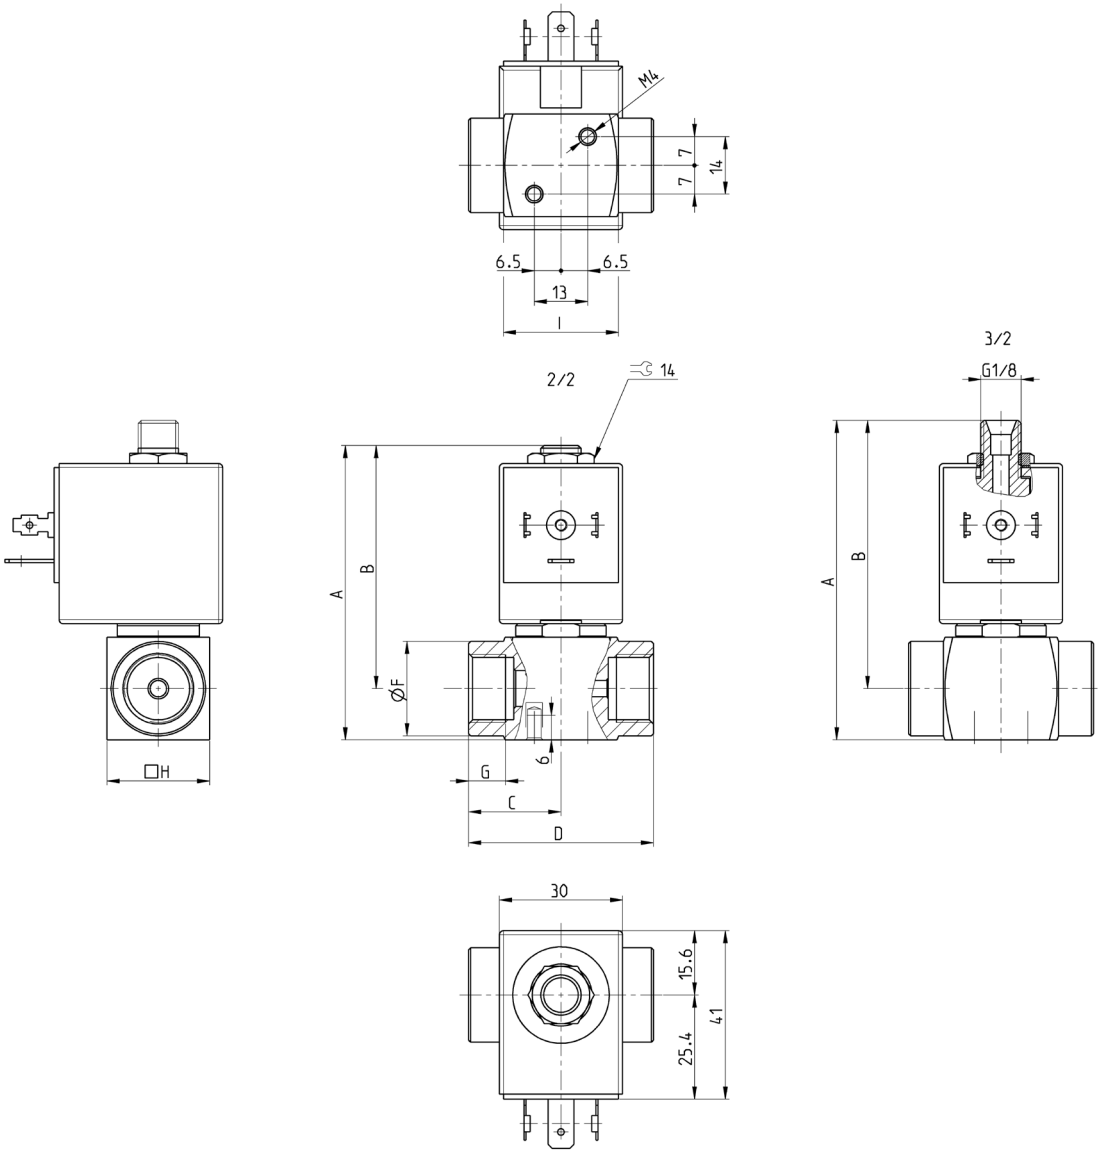

Mod.	Function	Connections	Orifice Ø (mm)	Kv [m³/h]	Pressure min-max (bar)	A	B	C	D	F	G	H	I	Pneumatic symbol
CFB-D21A-...X-*	2/2 NC	G1/8	1.5	0.08	0 ÷ 25	71.7	59.2	21	42	15	8	25	29	EV01
CFB-D21B-...X-*	2/2 NC	G1/8	2	0.10	0 ÷ 22	71.7	59.2	21	42	15	8	25	29	EV01
CFB-D21C-...X-*	2/2 NC	G1/8	2.5	0.14	0 ÷ 15	71.7	59.2	21	42	15	8	25	29	EV01
CFB-D22B-...X-*	2/2 NC	G1/4	2	0.10	0 ÷ 22	71.7	59.2	21	42	18	8	25	28	EV01
CFB-D22C-...X-*	2/2 NC	G1/4	2.5	0.14	0 ÷ 15	71.7	59.2	21	42	18	8	25	28	EV01
CFB-D22E-...X-*	2/2 NC	G1/4	3	0.18	0 ÷ 10	71.7	59.2	21	42	18	8	25	28	EV01
CFB-D23E-...X-*	2/2 NC	G3/8	3	0.18	0 ÷ 10	71.7	59.2	22.5	45	23	9.5	25	28	EV01
CFB-D23F-...X-*	2/2 NC	G3/8	4	0.28	0 ÷ 6	71.7	59.2	22.5	45	23	9.5	25	28	EV01
CFB-D24E-...X-*	2/2 NC	G1/2	3	0.18	0 ÷ 10	76.7	61.7	24.5	49	27.5	11	30	31	EV01
CFB-D24F-...X-*	2/2 NC	G1/2	4	0.28	0 ÷ 6	76.7	61.7	24.5	49	27.5	11	30	31	EV01
CFB-D32A-...X-*	3/2 NC	G1/4	1.5	0.08	0÷13	77.8	65.3	21	42	18	8	25	28	EV45
CFB-D32B-...X-*	3/2 NC	G1/4	2	0.1	0÷9	77.8	65.3	21	42	18	8	25	28	EV45
CFB-D32C-...X-*	3/2 NC	G1/4	2.5	0.14	0÷5.5	77.8	65.3	21	42	18	8	25	28	EV45
CFB-D32E-...X-*	3/2 NC	G1/4	3	0.18	0÷4	77.8	65.3	21	42	18	8	25	28	EV45

* add
- SEALS MATERIAL
- VOLTAGE (see CODING EXAMPLE)

Products designed for industrial applications. General terms and conditions for sale are available on www.camozzi.com
This document contains a description of the products offered by Camozzi Automation at time of publication.
For more complete and up to date information about the Camozzi Automation product range, please refer to our online catalogue at https://shop.camozzi.com